

Our Technologies, Your Tomorrow







Elegant Timeless Design

The new ZSX and ZS series air-conditioners have been stylishly designed with rounded contours that fit beautifully into any of Europe's diverse interior settings. The design was created by the Italian industrial design studio Tensa srl, based in Milan, to respond to a broad spectrum of local user needs.



ZSX series

ZS series colour variations available

Users can choose the model from three different colours allowing more choice depending on the style of the room.







Leading energy efficiency and high reliability with Mitsubishi Heavy Industries advanced technology.

What kind of solution Mitsubishi Heavy Industries Air-Conditioner can offer?



- Keep comfort by quick cool-down/warm-up



Energy Saving

High energy saving with comfort air conditioning; provides the user with multiple solutions between comfort and energy savings.

All the models can achieve high energy efficiency by use of Mitsubishi Heavy Industries technology, such as high performance compressor, DC PAM inverter technology.

Quiet and Comfort

Mitsubishi Heavy Industries Thermal Systems offers a unique modest air conditioner; quiet and comfortable which provides precise air flow and capacity control.

Clean Air

Allergen clear operation cleans air using a control scheme unique to Mitsubishi Heavy Industries Thermal Systems. Furthermore, a wide array of air purification filters and self-cleaning operation helps keep the room air clean.

PRODUCT LINE UP

	Model				Ca	pacity Range	
	Model		2.0kW	2.5kW	3.5kW	4.0kW	
	Diamond NEW SRK-ZSX	P18	Assessing E. Multi	Single Multi	Single Multi		
	SRK-ZR	P20					
INVERTER HEAT PUMP MODEL	Premium Series NEW SRK-ZS	P21	Single A++	Single Multi	Single Multi		
	Standard Series SRK-ZMP	P22		Are the second of the second o	A **		
Single Multi	SRF-ZMX	P23		Single A**	Single A)**		
	SRR-ZM	P24		Single Multi	Single Multi		
	FDTC-VF	P25		Single A++	Signi A"	A"	
	Standard Series NEW SKM-ZSP	P30	150	170			
INVERTER MULTI-SPLIT	SRR-ZM	P31					
MODEL	FDUM-VF	P31					
	FDE-VG	P31					

	4.0kW	4.5kW	5.0kW	6.0kW	7.1kW
OUTDOOR UNIT GCM*2 P27	NEW A"	NEW A"	NEW AT	A"	A.

4.5kW	5.0kW	6.0kW	6.3kW	7.1kW	8.0kW	10.0kW
	Assesse	Autonom				
	Single Multi	Single Multi				
	Single Multi	Single Multi				
			ione 11		i	200
			A **	Single Multi	A **	NEW A
	X.essecon		Colour variati	ions available		
	Single Multi	Association	Black & White	Accounter	Titanium	
A						
Q.ASS						
	Single Multi					
	100					
	Single A	Single Multi				
	Single Multi	Single Multi				
	SHIRMHAMARARA					

8.0kW	10.0kW	12.5kW
A.	A A	

- *1 Common use for both Single and Multi.
- *2 Energy class depends on connected indoor units.
- *3 Energy label applies below cooling capacity 12kW.

HIGH EFFICIENCY

Consideration for the Environment

Several radical design changes and engineering developments have brought about a vast improvement in energy efficiency and environmental protection.

High efficient Performance: up to Class A +++

Mitsubishi Heavy Industries Thermal Systems classes its entire range with seasonal domestic energy factors that display energy ratings from A + to A +++. Important energy savings in both cooling mode and heating are acheived thanks to its DC PAM Inverter technology and DC twin rotary compressor. (ZSX series)


Higher Energy class (SEER/SCOP) 20Class 25Class 35Class Cooling Heating A+++ A+ Previous ZSX Previous ZSX Previous ZSX model Cooling Heating A+++ A++ A+++ A++ A+++ A++ A+++ A++ A+++ A+++

QUICK & HIGH EFFICIENCY Control

DC PAM inverter

An inverter driven system has a number of performance advantages over a constant speed system. For example, its variable compressor outputs can ensure quick heating after a startup and attain a set temperature more quickly.

The air conditioner can then slow down its compressor speed to save energy, keeping comfortable conditions. Moreover, the compressor is DC driven, so it provides higher performance.

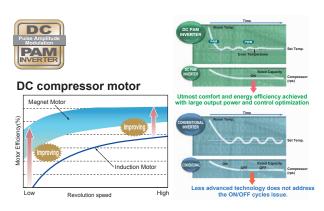

Vector Inverter Control

The inverter control, with the advanced vector control technology, functions at high efficiency.

- · Smooth operation from low speed to high speed
- · Smooth Sine Voltage Wave form are attained
- · Energy efficiency is further improved in low speed range

HIGH EFFICIENCY

DC Twin Rotary Compressor

The newly developed DC twin rotary compressor performs highly efficient operation under the wide range conditions from low speed to high speed.

Besides low vibration, low sound level and high efficiency can be also achieved by the optimization of mechanical parts dimension and by the application of high power Neodymium motor.





ENERGY SAVING



Eco Operation



Automatic energy saving control is done by detecting human acitivity. Human activity is detected by infra-red sensor which is installed in the unit. Air conditioner adjust its cooling/heating capacity according to low/high demand. Economy Cooling operation, Air conditioner controls its capacity lower and goes into energy saving control when low activity is detected.

Economy Heating operation, Air conditioner controls its capacity lower and goes into energy saving control when high activity is detected.

When the sensor detects that no people are present in the room, the unit will automatically reduce the power used to a moderate level after approximately 15 minutes and return to normal operation once people return to the room.

In a cooling operation



It is set to moderate operation when there is little movement in the room.

In a heating operation



It is set to moderate operation when there is a lot of movement in the room.

Auto Off



Air conditioner stop operation and goes to "stand-by" mode after 1-hour absence. It turns ON again when human activity is detected within 12-hour, or turned OFF after 12-hour absence.

*Can also be set to turn OFF after two hours.

Absent



It suppresses the power when there is nobody present in the room.

After 1-hour



You do not need to worry, even if you forget to turn off the power. Air-conditioner keeps stop until human activity is detected.

Come back to room



Automatically operates in the preset mode if you return to the room in twelve hours.

Fuzzy Auto Operation

The temperature and humidity sensors check room conditions.

The unit automatically controls the operation mode and the setting temperature to operate efficiently.

Operation mode and cooling/heating capacity is controlled automatically according to one setting tempertature.

Fuzzy auto operation offers automatic comfort temperature control even if weather condition changes quickly.


AIR FLOW

Jet Technology Quiet Air Flow & Long Reach

We used the same aerodynamic analysis technology as used in developing jet engines.


CFD (computational fluid dynamics), used in blade shape design of jet engines, has been applied to the design of air channels in air conditioners to develop the ideal air channel system (air circulation). The jet air stream generated by this air channel system can bring large volume air without consuming much power.

While at the same time, it delivers a uniform gentle breeze to every corner of the room.

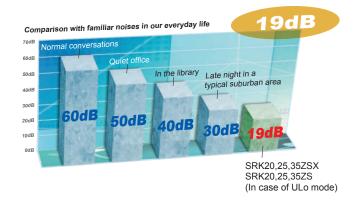



(C)Mitsubishi Aircraft Corporation



Long Reach Air Flow


Long reach air flow is realized by Jet technology. Good for large living rooms and shops, which increases comfort.



Double Flap Large and Small

Double flaps can control optimized air flow, horizontal and long reach air flow in cooling, strong and downward air flow in heating, which can produce comfort room temperature condition.



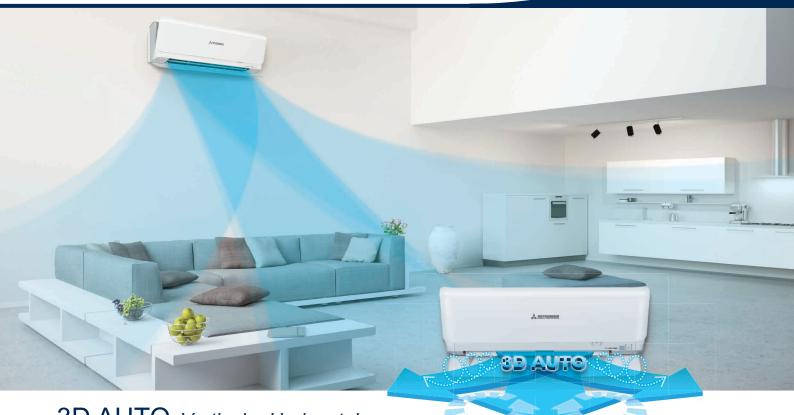

3D AUTO Vertical + Horizontal Multi motors make 3 independent controls

3D AUTO is one touch programmed and multi motors make three independent air flow controls.

The uniform and quiet airflow can be delivered to every corner of the room, achieving economical operation and minimizing energy loss.

Programmed 3D AUTO

Hi-Power (Quick)

Cool Breeze
Floor Heating

Wide Swing (Every Corner)

Center (Long)

Wide-Air (Equal)

Cool Breeze

Thanks to automatic control of air flow volume and air flow direction, comfortable air conditioning of the entire room can be done effectively.

The cooled air flows directly to the ceiling in cooling operation mode, not directly at the occupants of the room. Comfort cooled air flow comes via the ceiling like a cool breeze. In the heating mode, warm air flow can be sent down to the floor directly. The warm air then spreads along the floor achieving optimum comfort.

Horizontal swings in 8 directions



The airflow direction from the right and left louvers can be controlled individually. Eight different air flow patterns can be selected.


CLEAN AIR

This is the original and only technology to control the temperature and humidity for inactivating allergens

Allergen Clear Operation

This can be activated by pressing the "allergen" button on the remote control and lasts 90 minutes before stopping automatically. It neutralizes all the bacteria collected on the surface of the anti-allergenic filter thanks to its sophisticated interaction between temperature and humidity controls.



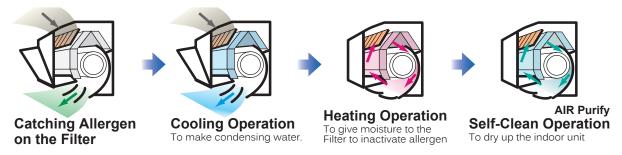

Self Clean Operation

Self clean operation is operated for 2 hours after the unit has stopped its normal operation.


The indoor unit is dried up and the growth of mold is restrained. Users can select whether this mode is utilized or not.

Situation of mold after one week


When you don't execute "Self Clean Operation"





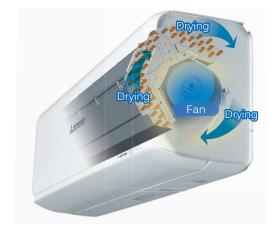





Allergen Clear Filter

Enzyme + Urea deactivates allergens and bacteria.




The allergen clear filter breaks down the pollen*1, lice*1, and allergens that live on cat skins, etc. and deactivates them. The secret of deactivation is the Enzyme-urea compound. It deactivates not only allergens but also all kinds of bacteria*2, molds and viruses*3. Even if allergens and bacteria, etc. fly of the filter, they are deactivated, so the air in your room is kept fresh.

- *1 Test method:
 - ELISA colorimetric method Laboratory: Independent administrative agency national hospital mechanism Sagamihara Hospital, No.1536
- *2 Test method: ELISA colorimetric method / ELISA fluorescent method Laboratory: Independent administrative agency national hospital mechanism Sagamihara Hospital, No.1536
- *3 Test method: TCID (Infection value 50%) Laboratory: Foundation of Kitazato Environmental Science Center, No.15-0145

Structure of Preventing Dirt

Always keeping the indoor unit clean

The fan has undergone anti-microbial treatment to resist mold and germs, making the system clean and safe. Foul odours and molds, etc. which can occur when an air conditioning system is not in operation are prevented.

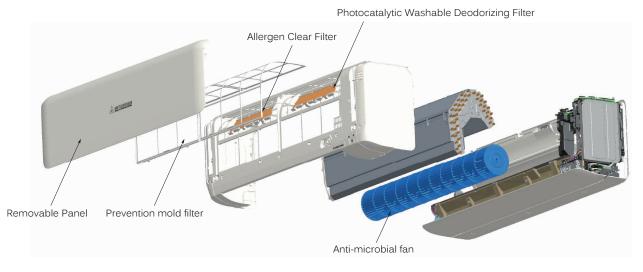

• Aspergilus niger IFO6341

Testing Authority: Japan Food Analysis Center

Test Report No.: 104034022-002

Tests were conducted with reference to the antimicrobial strength tests in JIS Z 2801 "Antimicrobial Products-Antimicrobial Test Method" –5.2 Antimicrobial Effects: Test Methods for Plastic Products, etc.




Comparison of growth of bacteria and mold on fan surfaces (microscopic image)

In tests conducted at the Mitsubishi Heavy Industries Nagoya Research Lab, 24 hours after contact with bacteria, cultured on agar media.

Photocatalytic Washable Deodorizing Filter

It will keep the air fresh by deodorizing the molecules causing odour. Its deodorizing power can be restored by washing with water and drying under the sun, as such it is a Recycling deodorizing filter capable of repeat use.



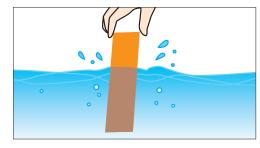

Used in models

Filter Indoor Unit	SRK-ZSX	SRK-ZR	SRK-ZS
Allergen Clear Filter	1pc	1pc	1pc
Photocatalytic Washable Deodorizing Filter	1pc	1pc	1pc

COMFORT & CONVENIENCE



High Power Operation

In a cooling operation

This operation mode delivers powerful cool air to cool the room quickly.

It blows powerful cool air when you want to be cooled down after bathing or returning home on a hot summer day so that you can enjoy a cool sensation immediately. The air conditioner automatically returns to the previous operation mode in 15 minutes to prevent the room from being cooled excessively.

In a heating operation

This operation mode warms the whole room from the vicinity of the air conditioner to your feet.

It warms up the room promptly when you want to be warmed such as getting out of bed or returning home during the winter seasons. The air conditioner automatically returns to the previous operation mode in 15 minutes to prevent the room from being warmed excessively.

Silent Operation

When Silent operation is set, the maximum pressure level of the outdoor unit will be 3dB(A) lower than standard nominal level (45dB(A) or less). The compressor speed is set at a lower range than that of nominal operation, operating at 60% of nominal capacity.

Maximum fan speed of outdoor unit is set lower than nominal operation.

Night Setback Operation

During cold seasons, room temperatures can be maintained at a comfortable level even while the room is unattended.

The air conditioner keeps the temperature at 10°C.





Weekly Timer Operation

Up to 4 programs with timer operation (ON-TIMER / OFF-TIMER) are available for each day of the week. Maximum 28 programs per week can be set.

Once set, the timer operation will repeat the same program every week unless otherwise canceled.

Available operation setting with weekly timer


- · Operation mode (Auto, cooling, heating, dry, fan)
- Temp. setting
- · Air flow volume, direction
- ECO, ECONO, Night Setback, Silent mode





Sleep Timer

Too much cooling/heating is not necessary when people go to sleep. This function achieves moderate cooling/heating by adjusting its capacity and more energy saving as well.

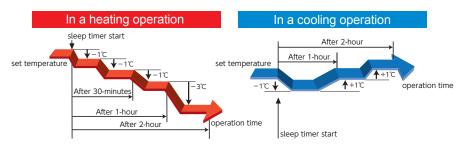


Pre-Operation to comfort start-up

Air conditioner controls room temperature to achieve confort at the "set time" by 60-minutes pre-operation. This is convenient when you wake up and return home at a predetermined time.

In ON-TIMER operation, the unit starts the operation a little earlier, so that the room can approach optimum temperature at ON time.

Mechanism

The room temperature is checked 60 minutes before the ON time. Depending on the temperature at that time, the operation starts 5 to 60 minutes before the timer is at ON.




Preset Operation



The Preset Operation features allows customised temperature and airflow settings, which will deliver ultimate comfort with one simple touch of the button.

Child Lock

Blocks the unit preventing tampering and inadvertent operations. This function is useful for families with young childen.

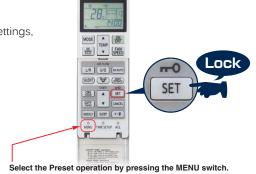


COMFORT & CONVENIENCE

Led Brightness Adjustment



Brightness of the LED display can be adjusted to suit.

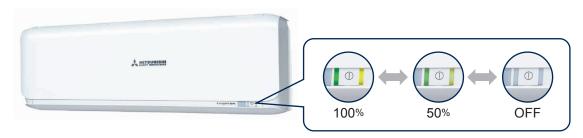

Installation Positioning


The air flow direction can be set to suit the rooms configuration.



Wide Range of Operation


Our new advanced technology has expanded the heating and cooling operation range. This permits installation of the units considering a heating and cooling operation under a low temperature condition down to –20°C. (ZSX series)

ZSX series

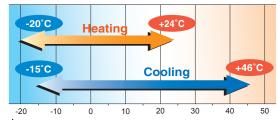


* For the capacities under low temperature conditions, refer to technical manual

All models (except ZSX series)

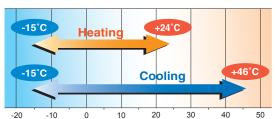

Long Piping Length

Piping length has been extended and design flexibility has been improved.

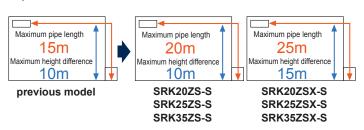


Installation of air-conditioners for a three-story house is available with long piping length

Suitable installation space can be found easily for outdoor units with long piping length.

As one outdoor unit is necessary for a three-story house the space required for installation is relatively small so the unit can be obscured in place.

Indoor units can be installed far apart such as on the first floor and as well as the third floor.



HIGH TECHNOLOGIES

Our Latest Technologies (ZSX series)

[Outdoor unit]

Propeller fan

Matching a propeller fan with a fan motor has been optimized in order to keep the same capacity as that of previous models with less electrical consumption. Synergy effect with leaf grill has increased efficiency by 5% and quietened the sound.



Serration fan


Coated PCB

The printed wiring board of the outdoor unit is coated. It lasts long having a tolerance for humidity.





Thanks to changing fin configuration from flat sheet to M shape fin, efficiency has increased by 10%. This high dimensional structure provides optimum balance of heat transfer and airflow.



DC Motor

DC fan motor produces high efficiency & high power

Leaf shape grill

The radial shape grill has been developed in order to send airflow efficiently out unit along the grill. Decreasing the load for motor and propeller fan leads to greater energy efficiency and contributes to guieter sound.

Superior corrosion resistance hot dipping steel sheet

Superior corrosion resistance hot dipping steel sheet is applied at the base of outdoor units. It has superior corrosion resistance and scratch resistance properties compared to conventional materials.



Three Sensors

Control of room temperature and humidity is very important for people to live a comfortable life

Use of three sensors to control indoor temperature, indoor humidity and outdoor temperature enable unit to obtain optimum air-conditioning






Sensor for indoor temperature and humidity Sensor for outdoor temperature

[Indoor unit] Heat exchanger

Our optimal combination of fin configuration and copper tube has maximized airflow volume without expanding indoor unit's size in width. The heat exchanger efficiency rate has been drastically improved by 33% compared with that of previous models. Fin can maximize airflow volume and save energy simultaneously.



Movable air inlet panel

Applying a movable air inlet panel, minimization of air resistance and advanced design are realized.



FUNCTIONS

Energy saving



Fuzzy Auto Mode

Automatically, the unit determines its operating mode and temperature setting based on a fuzzy calculation, and adjusts the inverter



Human Sensor

This sensor detects human motion acitivity and movement and inhibits unnecessary operation when not required.



Eco Operation

Room temperature and humidity are monitored using a sensor to automatically control the operation. In tandem with the human sensor, the system enables a energy saving mode while maintaining comfort.



Economy Mode

The unit realizes effective energy saving operation, while still keeping a comfortable cooling and heating condition.



Auto Off

Stops the operation automatically when there are no people activity detected in the room for a certain period of time.

Air flow



JET Technology

Aircraft technology is used to component design the airflow system of the air conditioner.



You can choose the best cooling or heating pattern by only pushing one button.



Auto Flap Mode

Whatever the operating mode is, the unit automatically selects the optimal angle.





Memory Flap

While the flap is swinging, it can be stopped at any angle desired. The flap returns to the position that it was in when operation last



Up/Down Flap Swing

Flap moves up and down continuously. The Up/Down flap swing can be fixed at the preferred operation angle.



Right/Left Louver Swing

Louver moves right and left continuously.
The Right/Left louver swing can be fixed at the preferred operation angle.



Air Outlet Selection

Both lower and upper air outlets and upper air outlet can be selected.

Clean Operation & Filter



Allergen Clear Operation

The system is equipped to suppress the influence of the allergen caught by the filter by controlled the temperature and humidity.



Self Clean Operation

The operation is operated for 2 hours after the unit has stopped its normal operation. The indoor unit is dried up and growth of mold is restrained.



Allergen Clear Filter

The filter breaks down the pollen, lice, and all allergens that live on cat skins, etc. and deactivates them.



Photocatalytic Washable Deodorizing Filter

It keeps air fresh by deodorizing the molecules causing odor. The deodorizing ability can be easily restored simply by cleaning and exposing to the sunlight.



Removable Panel

Maintenance has been made easy as the front panel is easy to remove for easy cleaning and maitenance.

Comfort & Convenience



Dry Operation

The unit dehumidifies the room by intermittent cooling operation.



High Power Operation

The unit can operate continuously in "HI POWER" mode for 15 minutes. This mode is convenient to reach the desired temperature



Silent Operation

The sound level of outdoor units is at least 3 dB(A) lower than the nominal level.



Night Setback

During cold seasons, room temperatures can be maintained at a comfortable level even while the room is unattended.
The air conditioner keeps the temperature at



Weekly Timer

Up to 4 programs with timer operation (ON-TIMER/OFF-TIMER) are available for each day of the week. MAX 28 programs per week can



①n 24-hour On/Off 24h Timer Programmable Timer

By combining a start timer with a stop timer, you can register two timer operations a day. Once set, timers will faithfully start or stop the system at a specified time of the day repeatedly.



Sleep Timer

The room temperature is automatically controlled during the set sleep mode period ensuring that room temperature will not get too cold or too hot.



On/Off Timer

The unit will start and stop the operation automatically at the set time



Comfort Start-up

In ON-TIMER operation, the unit automatically starts the operation a little earlier, so that the room can approach optimum temperature at



Preset Operation

The desired preset operation mode can be enabled with a single touch of a button.



Child Lock

Blocks the unit preventing tampering and inadvertent operations. This function is useful for families with young childen.



LED Brightness Adjustment

Brightness of the LED display can be adjusted



Positioning of Installation

You can set the left-right air flow directions when you installed the air conditioner near the side wall by remote controller operation.

Others



Microcomputer-Operated Defrosting

This mode automatically eliminates frost, and helps minimize excessive operation in other



Self-Diagnostic Function

In the case that the air conditioner malfunctions, an internal microcomputer automatically runs a self-diagnosis. (Inspection and repair should be performed by authorized dealers.)



Auto Restart Function

Power blackout auto restart function is a function that records the operational status of the air-conditioner immediately prior to it being switched off by a power cut, and then automatically resumes operations at that point after the power has been restored.

			/,	st 1	?/1	/ 3/1	MP c	at /ci	RR &	91°	/s/ &	JUMÎ F
	Fuzzy	Fuzzy Auto Mode	1	1	>/1 •	1	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \)	•	· 1	•	•
ing		Human Sensor NEW	•									
Energy saving	<u> </u>	Eco Operation NEW	•									
nerg	Economy	Economy Mode		•	•	•	•	•		•		
ш	Auto	Auto Off NEW	•									
	<u> </u>	JET Technology	•	•	•	•				•		
	3D Auto	3D Auto	•	•	•							
>	Auto Flap	Auto Flap Mode	•	•	•	•	•		•	•		•
Air flow	Memory	Memory Flap	•	•	•	•	•		•	•		•
Ā	UP/DOWN	Up/down Flap Swing	•	•	•	•	•		•	•		•
	Latera	Right/Left Louver Swing	•	•	•							
	Air outlet selection	Air Outlet Selection					•					
ilter	Allergen Operation	Allergen Clear Operation*1	•	•	•							
Clean operation & Filter	Sel Company	Self Clean Operation Allergen Clear Filter		•	•	•	•	•		•		
eratio	Alorgen Filter			•	•		•					
do u	SUN Filter	Photocatalytic Washable Deodorizing Filter	•	•	•		•					
Clea	4	Removable Panel	•	•	•		•					
	DRY	Dry Operation	•	•	•	•	•	•	•	•	•	•
	HPOWER	High Power Operation	•	•	•	•	•	•	•	•	•	•
	Silenty.	Silent Operation*1	•	•	•		•	•				
9	Night Setback 10°C	Night Setback	•	•	•		•	•				
Convenience	On World times Off	Weekly Timer	•	•	•		•	•				
nven	On 24h Timer Off	24-hour On/Off Programmable Timer	•	•	•	•	•	*2	•	•	•	•
ပ္သ	Sleep *	Sleep Timer	•	•	•	•	•	•		•		
fort	On Off Timer	On/Off Timer	•	•	•	•	•	•	•	•	•	•
Comfort &	Comfort	Comfort Start-up	•	•	•	•	•	•		•		
	Preset	Preset Operation NEW	•		•							
	Child Lock	Child Lock	•	•	•		•	•				
	LED Brightness Adjustyynt	LED Brightness Adjustment	•		•							
	Positioning of installation	Positioning of Installation	•	•	•							
r _S	MC •°°	Microcomputer-Operated Defrosting	•	•	•	•	•	•	•	•	•	•
Others	Self Diagnostic	Self-Diagnostic Function	•	•	•	•	•	•	•	•	•	•
	Auto	Auto Restart Function	•	•	•	•	•	•	•	•	•	•

^{*1} In case of Multi-split system, is not available.
*2 When using Wired remote contorol.
*3 When using Wireless remote contorol.











NEW



Single Multi

SRK-ZSX series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

MITSUBISHI HEAVY INDUSTRIES



Wireless remote control



SRC20ZSX-S, SRC25ZSX-S, SRC35ZSX-S, SRC50ZSX-S, SRC60ZSX-S

FUNCTIONS

Energy saving

























Others





































■ SPECIFICATIONS

Indoor unit				SRK20ZSX-S	SRK25ZSX-S	SRK35ZSX-S	SRK50ZSX-S	SRK60ZSX-S
Outdoor unit				SRC20ZSX-S	SRC25ZSX-S	SRC35ZSX-S	SRC50ZSX-S	SRC60ZSX-S
Power source						1Phase, 220 - 240, 50H	Z	
Nominal cooling	capacity	(Min~Max)	kW	2.0 (0.9~3.2)	2.5 (0.9~3.7)	3.5 (0.9~4.3)	5.0 (1.0~5.8)	6.1 (1.0~6.8)
Nominal heating	capacity	(Min~Max)	kW	2.7 (0.8~5.3)	3.2 (0.8~5.8)	4.3 (0.8~6.6)	6.0 (0.6~8.1)	6.8 (0.6~8.7)
Power consumpt	ion	Cooling/Heating	kW	0.32 / 0.47	0.44 / 0.59	0.78 / 0.90	1.30 / 1.36	1.81 / 1.67
EER/COP		Cooling/Heating		6.25 / 5.74	5.68 / 5.42	4.49 / 4.78	3.85 / 4.41	3.37 / 4.07
Inrush current			Α	2.5	3.0	4.3	5.0	5.0
Max. running cur	rent		_ ^	9	9	9	15	15
Sound power	Indoor	Cooling/Heating		53 / 53	55 / 56	58 / 58	59 / 62	62 / 63
level	Outdoor	Cooling/Heating		56 / 58	57 / 58	61 / 62	63 / 63	65 / 64
Sound pressure	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	38 / 31 / 24 / 19	39 / 33 / 25 / 19	43 / 35 / 26 / 19	44 / 39 / 31 / 22	46 / 41 / 33 / 22
level	Indoor	Heating (Hi/Me/Lo/Ulo)		38 / 32 / 25 / 19	40 / 34 / 27 / 19	41 / 35 / 28 / 19	46 / 41 / 33 / 23	46 / 42 / 34 / 23
level	Outdoor	Cooling/Heating		43 / 44	44 / 45	48 / 47	50 / 49	52 / 52
	Indoor	Cooling (Hi/Me/Lo/Ulo)		11.3 / 9.1 / 6.0 / 5.0	12.2 / 10.0 / 6.7 / 5.0	13.1 / 10.8 / 7.3 / 5.0	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m³/min	12.2 / 10.3 / 7.2 / 5.4	12.8 / 11.0 / 7.8 / 5.4	13.9 / 11.8 / 8.6 / 5.4	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2
	Outdoor	Cooling/Heating		31.0 / 31.0	31.0 / 31.0	36.0 / 31.0	39.0 / 33.0	41.5 / 39.0
Exterior	Indoor	HeightxWidthxDepth				305 x 920 x 220		
dimensions	Outdoor	neignixvvidinxDepin	mm			640 x 800(+71) x 290		
Net weight	Indoor / 0	Outdoor	kg		13.0 / 43.0		13.0	/ 45.0
Refrigerant		Type/GWP				R410A / 2088		
Reingerani		Charge	kg/TCO ₂ Eq		1.45 / 3.028		1.50 /	3.132
Refrigerant piping	Refrigerant piping size Liquid/Gas		ø mm		6.35(1/4") / 9.52(3/8")		6.35(1/4")	/ 12.7(1/2")
Refrigerant line (one way) length		m		Max.25		Ma	x.30	
Vertical height differences Outdoor is higher/le		Outdoor is higher/lower	m		Max.15 / Max.15		Max.20	/ Max.20
Outdoor operatin	ıg	Cooling	°C	-15~46				
temperature range Heating			-20 ~ 24					
Clean filter					Allergen Clear Filter x 1	, Photocatalytic Washab	le Deodorizing Filter x	1

[•] The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB.


Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

• Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

• tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

Mitsubishi Heavy Industries latest technology offers high seasonal efficiency

The new ZSX series meets outstanding energy efficiency receiving Europe's highest seasonal energy rating (A+++).

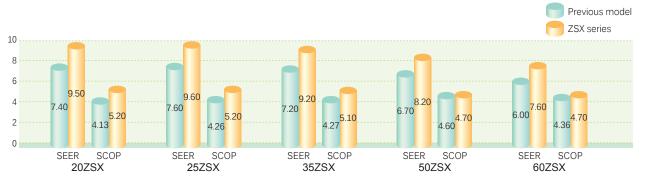

- SEER and SCOP is defined in European regulations. Please refer to P74

Elegant Timeless Design

The new ZSX series air-conditioners have been stylishly designed with rounded contours that fit beautifully into any of Europe's diverse interior settings. The design was created by the Italian industrial design studio Tensa srl, based in Milan, to respond to a broad spectrum of local user needs.



Movable air inlet panel


Applying a movable air inlet panel, minimization of air resistance and advanced design are realized.



Easy to Remote control

The wall mounted unit comes with a wireless infra-red remote controller which is used to control the unit's settings such as temperature, fan speed, heating or cooling mode.

The controller has a user-friendly design with large buttons. There are many key benefits such as eco-mode settings, which allow energy to be saved. There is also a weekly timer which can be set to your own parameters and when required for your convenience. There is also a silent mode option, which can be selected when going to sleep so there are minimal noise levels.

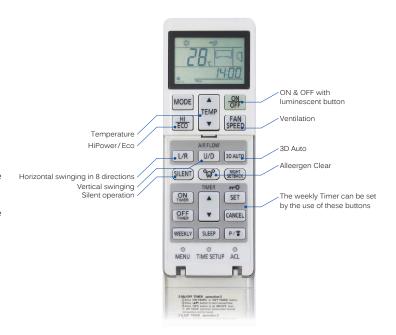





Wall Mounted type



SRK63ZR-S, SRK71ZR-S, SRK80ZR-S, SRK100ZR-S





SRK71ZR-S can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.







SRC63ZR-S



SRC71ZR-S, SRC80ZR-S



FDC100VNP

FUNCTIONS

Energy saving





























Comfort & Convenience































■ SPECIFICATIONS

Indoor unit				SRK63ZR-S	SRK71ZR-S	SRK80ZR-S	SRK100ZR-S			
Outdoor unit				SRC63ZR-S	SRC71ZR-S	SRC80ZR-S	FDC100VNP			
Power source					1 Phase, 220 - 240V, 50Hz					
Nominal cooling	capacity (N	lin~Max)	kW	6.3 (1.2~7.1)	7.1 (2.3~7.7)	8.0 (2.3~9.0)	10.0 (2.4~10.5)			
Nominal heating	capacity (N	lin~Max)	kW	7.1 (0.8~9.0)	8.0 (2.0~10.0)	9.0 (2.1~10.5)	11.2 (3.2~11.5)			
Power consumpti	on	Cooling/Heating	kW	1.85 / 1.74	2.05 / 2.06	2.35 / 2.40	3.09 / 3.28			
EER/COP		Cooling/Heating		3.41 / 4.08	3.46 / 3.88	3.40 / 3.75	3.24 / 3.41			
Inrush current		220/230/240 V	A	8.5 / 8.1 / 7.8	9.6 / 9.1 / 8.8	11.1 / 10.6 / 10.2	15.1 / 14.4 / 13.8			
Max. running cur	rent		_ ^	14.5	17	17	21			
Sound power	Indoor	Cooling/Heating		58 / 58	58 / 60	62 / 62	63 / 63			
level	Outdoor	Cooling/Heating		67 / 66	65 / 63	68 / 67	70 / 74			
Sound pressure	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	44 / 39 / 35 / 25	44 / 41 / 37 / 25	47 / 44 / 39 / 26	48 / 45 / 40 / 27			
level	Indoor	Heating (Hi/Me/Lo/Ulo)		44 / 38 / 34 / 28	46 / 39 / 35 / 28	47 / 41 / 36 / 29	48 / 43 / 38 / 30			
levei	Outdoor	Cooling/Heating		54 / 54	53 / 51	56 / 55	57 / 61			
	Indoor	Cooling (Hi/Me/Lo/Ulo)		20.5 / 18.1 / 15.7 / 10.4	20.5 / 18.6 / 16.2 / 10.4	23.5 / 20.2 / 17.5 / 10.4	24.5 / 21.3 / 17.6 / 10.4			
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m³/min	23.5 / 19.0 / 16.5 / 13.1	25.5 / 19.8 / 17.3 / 13.3	26.5 / 21.3 / 18.4 / 13.5	27.5 / 23.2 / 19.1 / 13.6			
	Outdoor	Cooling/Heating		41.5 / 41.5	55 / 43.5	63 / 49.5	75 / 80			
Exterior	Indoor	HeightxWidthxDepth		339 x 1197 x 262						
dimensions	Outdoor	Heightxwidthxbepth	mm	640 x 800(+71) x 290	750 x 880((+88) x 340	845 x 970 x 370			
Net weight	Indoor / O	utdoor	kg	15.5 / 45	15.5 / 57	16.5 / 58.5	16.5 / 70			
Refrigerant		Type/GWP			R410A	A / 2088				
Reingerant		Charge	kg/TCO ₂ Eq	1.55 / 3.236	1.8 / 3.758	1.9 / 3.967	2.55 / 5.324			
Refrigerant piping	Refrigerant piping size Liquid/Gas		ø mm	6.35(1/4") / 12.7(1/2")	6.35(1/4") /	15.88(5/8")	9.52(3/8") / 15.88(5/8")			
Refrigerant line (one way) length		m		Ma	x.30					
Vertical height differences Outdoor is higher/le		Outdoor is higher/lower	m		Max.20	/ Max.20				
Outdoor operating		Cooling	- °C		-15	~46				
temperature rang	е	Heating			-15	~24				
Clean filter				Allergen (Clear Filter x 1, Photocatal	lytic Washable Deodorizin	g Filter x 1			

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential. warming potential.



INVERTER HEAT PUMP MODEL

SRK-ZS

Wall Mounted type







SRK20ZS-S, SRK25ZS-S, SRK35ZS-S, SRK50ZS-S

Elegant Timeless Design

Unification of the design between ZSX and ZS series. Users can choose their favorite colour from three choices. SRK-ZS series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.



Black & White (-SB)



Titanium (-ST)



Single

Multi



Wireless SRC20ZS-S, SRC25ZS-S remote control SRC35ZS-S



SRC50ZS-S

FUNCTIONS

Energy saving



























Comfort & Convenience

































Others





■SPECIFICATIONS

Indoor unit				SRK20ZS-S,-SB,-ST	SRK25ZS-S,-SB,-ST	SRK35ZS-S,-SB,-ST	SRK50ZS-S,-SB,-ST		
Outdoor unit				SRC20ZS-S	SRC25ZS-S	SRC35ZS-S	SRC50ZS-S		
Power source				1 Phase, 220 - 240V, 50Hz					
Nominal cooling of	capacity (N	lin~Max)	kW	2.0(1.0~2.8)	2.5(1.0~3.0)	3.5(1.0~3.8)	5.0(1.7~5.5)		
Nominal heating	capacity (N	/lin~Max)	kW	2.7(0.9~4.2)	3.2(0.9~4.4)	4.0(0.9~4.8)	5.8(1.6~6.6)		
Power consumpti	on	Cooling/Heating	kW	0.44 / 0.62	0.62 / 0.80	1.01 / 1.00	1.56 / 1.59		
EER/COP		Cooling/Heating		4.55 / 4.35	4.03 / 4.00	3.47 / 4.00	3.21 / 3.65		
Inrush current		220/230/240 V	A	3.2 / 3.1 / 3.0	4.0 / 3.8 / 3.6	4.9 / 4.7 / 4.5	7.3 / 7.0 / 6.7		
Max. running curr	ent		_ ^	9	9	9	14.5		
Sound power	Indoor	Cooling/Heating		50 / 52	52 / 55	56 / 58	58 / 59		
level	Outdoor	Cooling/Heating		57 / 57	58 / 58	62 / 61	62 / 63		
Sound pressure	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	34 / 25 / 22 / 19	36 / 28 / 23 / 19	40 / 30 / 26 / 19	45 / 36 / 28 / 22		
level	Indoor	Heating (Hi/Me/Lo/Ulo)		36 / 29 / 23 / 19	39 / 30 / 24 / 19	41 / 36 / 25 / 19	45 / 37 / 31 / 24		
ievei	Outdoor	Cooling/Heating		45 / 45	46 / 46	50 / 48	51 / 53		
	la da an	Cooling (Hi/Me/Lo/Ulo)		9.3 / 7.0 / 5.9 / 5.0	9.9 / 8.0 / 5.9 / 5.0	11.3 / 8.7 / 7.0 / 5.0	12.1 / 9.9 / 7.4 / 5.9		
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m³/min	10.0 / 8.5 / 6.5 / 5.9	11.3 / 8.7 / 6.7 / 5.9	12.3 / 11.0 / 7.0 / 5.9	13.9 / 11.2 / 9.1 / 7.4		
	Outdoor	Cooling/Heating		27.4 / 23.6	27.4 / 23.6	31.5 / 27.8	32.8 / 32.8		
Exterior	Indoor	HeightxWidthxDepth			290 x 87	70 x 230			
dimensions	Outdoor	Heightxwidthxbepth	mm		540 x 780(+62) x 290		595 x 780(+62) x 290		
Net weight	Indoor / O	utdoor	kg	9.5 /	31.5	9.5 / 34.5	10 / 36.5		
Refrigerant		Type/GWP			R410A	/ 2088			
Reingerant		Charge	kg/TCO ₂ Eq	0.75 /	1.566	0.95 / 1.984	1.25 / 2.61		
Refrigerant piping	g size	Liquid/Gas	ø mm		6.35(1/4") / 9.52(3/8")		6.35(1/4") / 12.7(1/2")		
Refrigerant line (d	Refrigerant line (one way) length		m		Max. 20		Max. 25		
Vertical height differences Outdoor is higher/lower		m		Max. 15 / Max. 15					
Outdoor operating	9	Cooling	· °C		-15	~46			
temperature rang	е	Heating			-15	~24			
Clean filter				Allergen Clear	Filter x 1, Photocatal	ytic Washable Deodo	rizing Filter x 1		

[•] The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.





Wall Mounted type



SRK25ZMP-S, SRK35ZMP-S, SRK45ZMP-S

Compact and Light weight

The SRK-ZMP-S series offers great installation flexibility.













SRC45ZMP-S

FUNCTIONS

Energy saving















Others

Comfort & Convenience



















Clean operation & Filter

■ SPECIFICATIONS

Indoor unit				SRK25ZMP-S	SRK35ZMP-S	SRK45ZMP-S		
Outdoor unit				SRC25ZMP-S	SRC35ZMP-S	SRC45ZMP-S		
Power source					1 Phase, 220 - 240V, 50Hz			
Nominal cooling	capacity (N	lin~Max)	kW	2.5(0.9~2.8)	3.2(0.9~3.5)	4.5(0.9~4.8)		
Nominal heating	capacity (N	/lin~Max)	kW	2.8(0.8~3.9)	3.6(0.9~4.3)	5.0(0.8~5.8)		
Power consumpti	ion	Cooling/Heating	kW	0.78 / 0.755	0.995 / 0.995	1.495 / 1.385		
EER/COP		Cooling/Heating		3.21/3.71	3.22 / 3.62	3.01 / 3.61		
Inrush current		220/230/240 V	A	3.9 / 3.8 / 3.6	4.9 / 4.7 / 4.5	7.0 / 6.7 / 6.4		
Max. running cur	rent] ^ [9	9	14		
Sound power	Indoor	Cooling/Heating		59 / 58	60 / 58	60 / 64		
level	Outdoor	Cooling/Heating] [60 / 59	60 / 60	65 / 65		
Cound naccours	la de es	Cooling (Hi/Me/Lo)	dB(A)	45 / 34 / 23	47 / 36 / 23	46 / 40 / 25		
Sound pressure	Indoor	Heating (Hi/Me/Lo)		43 / 34 / 26	44 / 36 / 28	48 / 43 / 32		
level	Outdoor	Cooling/Heating] [47 / 45	49 / 48	52 / 53		
	la de es	Cooling (Hi/Me/Lo)		10.1 / 7.3 / 4.2	9.5 / 6.8 / 4.2	9.0 / 7.2 / 3.8		
Air flow	Indoor	Heating (Hi/Me/Lo)	m³/min	9.5 / 7.3 / 5.2	9.6 / 7.4 / 5.5	12.0 / 9.2 / 6.2		
	Outdoor	Cooling/Heating		26.0 / 19.7	25.4 / 20.5	35.5 / 33.5		
Exterior	Indoor	Liniante AAG date of Daniella		262 x 769 x 210				
dimensions	Outdoor	HeightxWidthxDepth	mm	540 x 645(+57) x 275	595 x 780(+62) x 290		
Net weight	Indoor / O	utdoor	kg	6.9 / 25	7.2 / 27	7.6 / 40		
Refrigerant		Type/GWP			R410A / 2088			
Reingerani		Charge	kg/TCO ₂ Eq	0.655 / 1.368	0.81 / 1.691	1.20 / 2.506		
Refrigerant piping	Refrigerant piping size Liquid/Gas		ø mm	6.35(1/4")	/ 9.52(3/8")	6.35(1/4") / 12.7(1/2")		
Refrigerant line (one way) length		m	Max	c. 15	Max. 25			
Vertical height differences Outdoor is higher/lower		m	Max. 10 / Max. 10		Max. 15 / Max. 15			
Outdoor operating Cooling		Cooling	°C		-15~46			
		Heating			-15~24			
Clean filter					_			

[•] The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

[•] Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
• 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.



INVERTER HEAT PUMP MODEL

SRF-ZMX

Floor Standing type








SRF25ZMX-S, SRF35ZMX-S, SRF50ZMX-S

Flap control system

Selection of flap position is possible. A flaps can be set at different angles.

can be selected.




Single Multi

SRF-ZMX series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

Installation workability

Piping and drain hose connection can be selected out of 6-directions.







remote control





SRC50ZMX-S

FUNCTIONS

Energy saving



















Comfort & Convenience























Others



■ SPECIFICATIONS

**SRF50ZMX can be connected to ZSX outdoor units. The specifications are to be advised.

Indoor unit				SRF25ZMX-S	SRF35ZMX-S	SRF50ZMX-S*		
Outdoor unit				SRC25ZMX-S	SRC35ZMX-S	SRC50ZMX-S		
Power source				1 Phase, 220 - 240V, 50Hz				
Nominal cooling capacity (Min~Max)			kW	2.5 (0.9~3.2)	3.5 (0.9~4.1)	5.0 (1.1~5.2)		
Nominal heating	capacity (N	/lin~Max)	kW	3.4 (0.9~4.7)	4.5 (0.9~5.1)	6.0 (0.6~6.9)		
Power consumpti	on	Cooling/Heating	kW	0.521 / 0.723	0.890 / 1.124	1.390 / 1.540		
EER/COP		Cooling/Heating		4.80 / 4.70	3.93 / 4.00	3.60 / 3.90		
Inrush current		220/230/240 V	A	3.6 / 3.4 / 3.3	5.2 / 4.9 / 4.7	7.1 / 6.8 / 6.5		
Max. running curr	ent		1 ^ _	8	8	15		
Sound power	Indoor	Cooling/Heating		51 / 51	52 / 52	58 / 58		
level	Outdoor	Cooling/Heating	1	60 / 60	63 / 62	63 / 62		
Sound pressure	la de es	Cooling (Hi/Me/Lo/Ulo)	dB(A)	40 / 32 / 29 / 26	41 / 34 / 32 / 28	46 / 42 / 35 / 32		
•	Indoor	Heating (Hi/Me/Lo/Ulo)		40 / 35 / 33 / 28	41 / 36 / 35 / 31	47 / 41 / 39 / 33		
level	Outdoor	Cooling/Heating		47 / 47	50 / 50	52 / 51		
	Indon	Cooling (Hi/Me/Lo/Ulo)		9.0 / 7.6 / 6.7 / 5.8	9.2 / 7.8 / 7.3 / 6.4	11.5 / 9.6 / 7.4 / 6.6		
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m³/min	10.5 / 8.2 / 7.7 /6.6	10.7 / 8.3 / 8.1 / 7.4	12.0 / 10.0 / 9.4 / 7.6		
	Outdoor	Cooling/Heating		29.5 / 27.0	32.5 / 29.5	39.0 / 33.0		
Exterior	Indoor	Llaighty Widthy Danth		600 x 860 x 238				
dimensions	Outdoor	HeightxWidthxDepth	mm	595 x 780	(+62) x 290	640 x 800(+71) x 290		
Net weight	Indoor / O	utdoor	kg	18 / 35	19 / 35	19 / 45		
Defriesess		Type/GWP			R410A / 2088			
Refrigerant		Charge	kg/TCO ₂ Eq	1.2 /	2.506	1.5 / 3.132		
Refrigerant piping	size	Liquid/Gas	ø mm	6.35(1/4")	/ 9.52(3/8")	6.35(1/4") / 12.7(1/2")		
Refrigerant line (d	ne way) le	ength	m	Max	c. 15	Max. 30		
Vertical height differences Outdoor is higher/lower		m	Max. 10 / Max. 10		Max. 20 / Max. 20			
Outdoor operating]	Cooling	°C -		-15~46			
temperature range		Heating			-15~24			
Clean filter				Allerson Clear Filter	x 1 Photocatalytic Washable D	Sandarinina Filton v 1		

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and

outdoor temp. of 7°CDB, 6°CWB.

• Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

• 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.





SRR-ZM

Ceiling Concealed type



SRR25ZM-S, SRR35ZM-S




SRR-ZM series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

Thin design

The height of all SRR models is only 200mm.

Bottom air inlet kit (option)







Wireless remote control

SRC25ZMX-S, SRC35ZMX-S

FUNCTIONS

Energy saving

Clean operation & Filter







Comfort & Convenience





















Others





SPECIFICATIONS

Indoor unit				SRR25ZM-S	SRR35ZM-S		
Outdoor unit				SRC25ZMX-S	SRC35ZMX-S		
Power source				1 Phase, 220) - 240V, 50Hz		
Nominal cooling	capacity (N	∕lin~Max)	kW	2.5 (1.0 ~ 3.3) 3.5 (1.0 ~ 3.9			
Nominal heating	capacity (N	∕lin~Max)	kW	3.4 (1.4 ~ 4.8)	4.2 (1.5 ~ 5.2)		
Power consumption		Cooling/Heating	kW	0.570 / 0.750	0.980 / 1.030		
EER/COP		Cooling/Heating		4.39 / 4.53	3.57 / 4.08		
Inrush current		220/230/240 V	A	3.9 / 3.7 / 3.6	5.0 / 4.8 / 4.6		
Max. running current] ^ [8	8		
Sound power	Indoor	Cooling/Heating		56 / 59	57 / 60		
level	Outdoor	Cooling/Heating		60 / 60	62 / 62		
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	37 / 33 / 30 / 24	38 / 34 / 31 / 25		
	maoor	Heating (Hi/Me/Lo/Ulo)		40 / 37 / 34 / 28	41 / 38 / 35 / 29		
	Outdoor	Cooling/Heating		47 / 47	50 / 50		
	la de es	Cooling (Hi/Me/Lo/Ulo)		9.5 / 8.0 / 6.5 / 4.5	10.0 / 8.5 / 7.0 / 5.0		
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m³/min	10.0 / 9.0 / 8.0 / 6.0	10.5 / 9.5 / 8.5 / 6.5		
	Outdoor	Cooling/Heating		29.5 / 27.0	32.5 / 29.5		
Exterior	Indoor	HeightxWidthxDepth		200 x 7	50 x 500		
dimensions	Outdoor	Heightxwidthxbepth	mm	595 x 780	(+62) x 290		
Net weight	Indoor / O	Outdoor	kg	20.5	5 / 35		
Refrigerant		Type/GWP		R410A	A / 2088		
Reingerani		Charge	kg/TCO ₂ Eq	1.2 /	2.506		
Refrigerant Ipipin	g size	Liquid/Gas	ø mm	6.35(1/4")	/ 9.52(3/8")		
Refrigerant line (one way) length		m	Ma	x. 15			
Vertical height dif	ferences	Outdoor is higher/lower	m	Max. 10	/ Max.10		
Outdoor operating	g	Cooling	- °C	-15	5~46		
temperature rang	е	Heating		-15	5~24		
Bottom air inlet ki	it (option)			UT-B.	AT1EF		

[•] The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and

outdoor temp. of 7°CDB, 6°CWB.

• Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

• 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global



INVERTER HEAT PUMP MODEL

FDTC-VF

4way Ceiling Cassette type



FDTC25VF, FDTC35VF, FDTC40VF, FDTC50VF, FDTC60VF



According to room temperature conditions, four directions of air flow can be controlled by individual flap as preferred. Individual flap control is available even after installation.








Multi

FDTC-VF series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit. (except 40VF)

Flap control system

Selection of flap position is possible. Individual flaps can be set at different angles.





RC-EX3






RCH-E3



RCN-TC-24W-E2

600mm Drain Pump is mounted

Drain can be discharged upward by 600mm from the ceiling surface close to the indoor unit.







RC-E5





SRC40ZSX-S, SRC50ZSX-S, SRC60ZSX-S

FUNCTIONS

Air flow Energy saving

























* When using Wireless remote control

SPECIFICATIONS

Indoor unit				FDTC25VF	FDTC35VF	FDTC40VF	FDTC50VF	FDTC60VF	
Outdoor unit				SRC25ZMX-S	SRC35ZMX-S	SRC40ZSX-S	SRC50ZSX-S	SRC60ZSX-S	
Power source					1 Phase, 220 - 240V, 50Hz				
Nominal cooling	Nominal cooling capacity (Min~Max)			2.55 (0.9 ~ 3.2)	3.6 (0.9 ~ 4.1)	4.0 (1.1 ~ 4.7)	5.0 (1.1 ~ 5.6)	5.6 (1.1 ~ 6.3)	
Nominal heating	capacity (N	Min~Max)	kW	3.45 (0.9 ~ 4.7)	4.25 (0.9 ~ 5.1)	4.5 (0.6 ~ 5.4)	5.4 (0.6 ~ 6.3)	6.7 (0.6 ~ 6.7)	
Power consumpti	on	Cooling/Heating	kW	0.6 / 0.84	1.07 / 1.16	1.04 / 1.10	1.56 / 1.45	1.99 / 2.07	
EER/COP		Cooling/Heating		4.25 / 4.11	3.36 / 3.66	3.85 / 4.09	3.21 / 3.72	2.81 / 3.24	
Inrush current		220/230/240 V	A	4.1 / 4.0 / 3.8	5.3 / 5.1 / 4.9	5.0	5.0	5.0	
Max. running curi	rent] A	8	8	12	15	15	
Sound power	Indoor	Cooling/Heating		56 / 56	58 / 58	60 / 60	60 / 60	60 / 60	
level	Outdoor	Cooling/Heating		56 / 56	58 / 58	63 / 63	63 / 63	65 / 65	
Sound pressure	Indoor	Cooling (Hi/Me/Lo)	dB(A)	36 / 32 / 29	40 / 36 / 30	42 / 36 / 30	42 / 36 / 30	46 / 39 / 30	
•	Indoor	Heating (Hi/Me/Lo)		38 / 33 / 29.5	42 / 35 / 32	42 / 36 / 32	42 / 36 / 32	46 / 39 / 32	
level	Outdoor	Cooling/Heating	1	47 / 47	50 / 50	49 / 49	50 / 49	52 / 52	
	la de es	Cooling (Hi/Me/Lo)		9 / 8 / 6.5	9.5 / 9 / 7	11.5 / 9 / 7	11.5 / 9 / 7	13.5 / 10 / 7	
Air flow	Indoor	Heating (Hi/Me/Lo)	m³/min	9.5 / 8.5 / 7	10/9/8	11.5 / 9 / 8	11.5 / 9 / 8	13.5 / 10 / 8	
	Outdoor	Cooling/Heating		29.5 / 27.0	32.5 / 29.5	36 / 33	40 / 33	41.5 / 39	
Exterior	Indoor	HeightxWidthxDepth			Unit : 248 x 5	70 x 570 Panel : 3	35 x 700 x 700		
dimensions	Outdoor	HeightxwidthxDepth	mm	595 x 780(+	-62) x 290	640 x 800(+71) x 290			
Net weight	Indoor / C	Outdoor	kg	18.5 (Unit : 15 P	anel: 3.5)/35	18.5 (Unit: 15 Panel: 3.	5)/45	
Refrigerant		Type/GWP			R410A	/ 2088			
Reingerani		Charge	kg/TCO ₂ Eq	1.2 / 2	.506		1.5 / 3.132		
Refrigerant piping	g size	Liquid/Gas	ø mm	6.35(1/4")/	9.52(3/8")	6	3.35(1/4") / 12.7(1/2	!")	
Refrigerant line (d	one way) le	ength	m	Max.	15		Max. 30		
Vertical height dif	ferences	Outdoor is higher/lower	m	Max. 10 /	Max.10		Max. 20 / Max.20		
Outdoor operating	g	Cooling	°C			-15~46			
temperature rang	е	Heating		-15~	24		-20~24		
Panel						TC-PSA-25W-E			

- The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB. 6°CWB.
- outdoor temp. of 7 CDB, 6 CWB.

 Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

 Powerful-Hi can be selected. Sound level dB(A):25VF(Cooling:38 Heating:39), 35VF(Cooling:41 Heating:43), 40/50/60VF(Cooling:47 Heating:47), Airflow m³/min:25VF(Cooling:10 Heating:10.5), 35VF(Cooling:11 Heating:11.5), 40/50/60VF(Cooling:13.5 Heating:13.5)

 *tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming partential.
 - warming potential.




INVERTER MULTI-SPLIT MODEL

Inverter Multi-split System

The Multi DC Inverter range are innovative Multi-split systems from Mitsubishi Heavy Industries Thermal Systems which offers the perfect answer for air conditioning comfort in several environments.

A single outdoor unit can air condition up to 6 different rooms. Utilising a range of compact and elegant indoor units that are available in 6 different types make air conditioning any indoor environment possible.

The whole range is characterised by high flexibility, high energy efficiency and extremely low noise

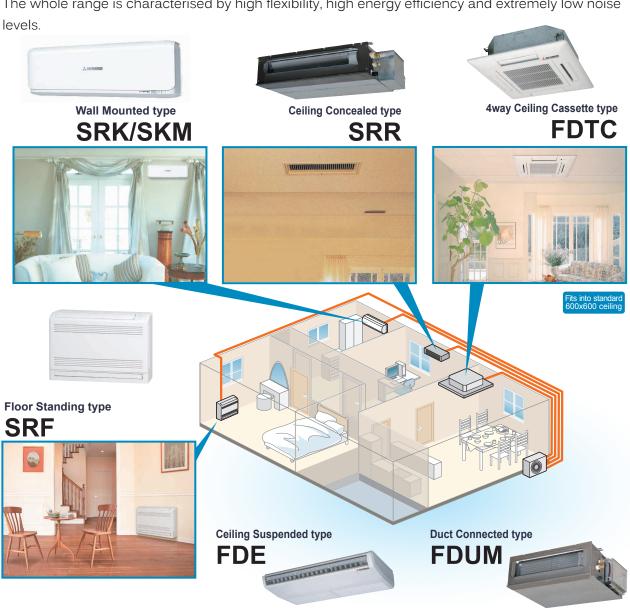








OUTDOOR UNITS

Powerful, efficient and silent outdoor units are available in 8 sizes and able to combine up to 6 indoor units.



Energy saving

All models can achieve very high seasonal efficiency thanks to the application of inverter technology which makes it possible to vary the power output according to demand for cooling or heating. This makes it possible to reach the set temperature quickly and to keep it stable over time saving about 30% in consumption compared to traditional fixed speed air conditioners.

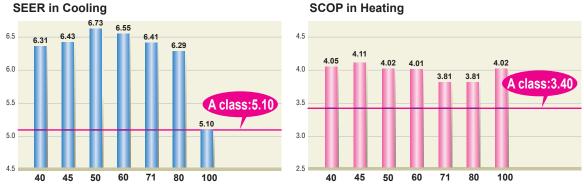

• The above values are based on indoor unit combination with SRK-ZSX-S only.

Comfort

Thanks to the application of the Twin Rotary compressor, the outdoor units have low noise levels. All the units also operate in heating and cooling mode with an outdoor temperature limit of -15 $^{\circ}$ C.

Compact

Compact enough to be installed in areas with a limited amount of space.



INVERTER MULTI-SPLIT MODEL


Long piping length


The maximum piping length of the refrigerant pipes for the outdoor units, and the maximum height difference for the outdoor units are as shown below.


		SCM40/45ZS-S	SCM50ZS-S/SCM60ZM-S	SCM71/80ZM-S	SCM100/125ZM-S
length for one indoor unit		under 25m	under 25m	under 25m	under 25m
	total length for all rooms	under 30m	under 40m	under 70m	under 90m
	lower installation spot of the indoor unit (A)	under 15m	under 15m	under 20m	under 20m
difference	upper installation spot of the indoor unit (B)	under 15m	under 15m	under 20m	under 20m
r	maximum height difference of the indoor units (C)	under 25m	under 25m	under 25m	under 25m
	length of precharged refrigerant pipe	30m	40m	40m	50m











■CONNECTABLE UNITS

Indoor	units	Outdoor units							
		40ZS-S	45ZS-S	50ZS-S	60ZM-S	71ZM-S	80ZM-S	100ZM-S	125ZM-S
	SRK20ZSX-S	•	•	•	•	•	•	•	•
NEW	SRK25ZSX-S	•	•	•	•	•	•	•	•
Accused	SRK35ZSX-S	•	•	•	•	•	•	•	•
-	SRK50ZSX-S			•	•		•	•	•
	SRK60ZSX-S				•	•	•	•	•
_	SRK71ZR-S					_	_	•	•
NEW	SRK20ZS-S	•	•	•	•	•	•	•	•
	SRK25ZS-S	•	•	•	•	•	•	•	•
Accounts	SRK35ZS-S	•	•	•	•	•	•	•	•
	SRK50ZS-S			•	•	•	•	•	•
NEW	SKM20ZSP-S	•	•	•					
	SKM25ZSP-S	•	•	•					
124	SKM35ZSP-S	•	•	•					
117	SRF25ZMX-S	•	•	•	•	•	•	•	•
	SRF35ZMX-S	•	•	•	•	•	•	•	•
	SRF50ZMX-S				•	•	•	•	•
	FDTC25VF	•	•	•	•	•	•	•	•
The state of the s	FDTC35VF	•	•	•	•	•	•	•	•
	FDTC50VF			•	•	•	•	•	•
	FDTC60VF				•	•	•	•	•
	SRR25ZM-S	•	•	•	•	•	•	•	•
	SRR35ZM-S	•	•		•	•	•	•	•
	SRR50ZM-S			•	•	•	•	•	•
	SRR60ZM-S				•	•	•	•	•
	FDUM50VF			•	•	•	•	•	•
SHILLIAM MARKATANA SAN TANDANA	FDE50VG			•	•	•	•	•	•

■OPTION

Wired remote control







Wireless remote control







RCN-KIT4-E2

RCN-E-E2

■SPECIFICATIONS

		Model	For two	rooms	For thre	e rooms	
Item			SCM40ZS-S	SCM45ZS-S	SCM50ZS-S	SCM60ZM-S	
Power Source			1Phase, 220 - 240V, 50Hz				
Nominal cooling capacity (Min~Max) kW			4.0(1.5~5.9)	4.5(1.5~6.4)	5.0(1.8~7.1)	6.0(1.8~7.5)	
Nominal heating capacity (Min~Max)	kW	4.5(1.3~6.3)	5.3(1.3~6.5)	6.0(1.4~7.5)	6.8(1.5~7.8)		
Power Consumption	Cooling	kW	0.84(0.59~2.13)	1.04(0.59~2.30)	1.05(0.60~2.15)	1.43(0.50~2.39)	
Power Consumption	Heating	kW	0.90(0.54~1.70)	1.15(0.54~1.92)	1.24(0.55~2.58)	1.51(0.60~3.00)	
EER	Cooling		4.76	4.33	4.76	4.2	
COP	Heating		5.00	4.61	4.84	4.5	
Inrush current		А	4.4/4.2/4.0	5.4/5.2/5.0	6.2/5.9/5.7	7.1/6.8/6.6	
Sound power level	Cooling	dB(A)	62	62	62	63	
	Heating	dB(A)	dB(A) 64		64	65	
Carried anna arrival large	Cooling	dB(A)	48	49	49	50	
Sound pressure level	Heating	dB(A)	50	50	51	52	
Air flow	Cooling		32.5	32.5	41.0	42.0	
All llow	Heating	m³/min	32.5	32.5	41.0	42.0	
Exterior dimensions (H×W×D)		mm	595×780(+90)×290	640×850	(+65)×290	
Net weight		kg	42	42	48.5	49	
Refrigerant	Type/GWP			R410A	\/2088		
Reingerant	Charge	kg/TCO ₂ Eq	1.9/3	3.967	2.5/	5.22	
Refrigerant piping size	Liquid	Фтт	6.35(1	/4")×2	6.35(1	/4")×3	
Reingerant piping size	Gas	Ψιιιιι	9.52(3	/8")×2	9.52(3	/8")×3	
Outdoor operating	Cooling	°C		-15^	-43		
temperature range	Heating		-15~24				
Number of Connectable indoor units			2	2	Min.2~Max.3	Min.2~Max.3	
Total indoor units capacity		kW	6.0	7.0	8.5	11.0	

		Model	For four rooms		For five/s	six rooms		
Item			SCM71ZM-S	SCM80ZM-S	SCM100ZM-S	SCM125ZM-S		
Power Source			1Phase, 220 - 240V, 50Hz					
Nominal cooling capacity (Min~Max)			7.1(1.8~8.8)	8.0(1.8~9.2)	10.0(1.8~12.0)	12.5(1.8~14.0)		
Nominal heating capacity (Min~Max)	kW	8.6(1.5~9.4)	9.3(1.5~9.8)	12.0(1.5~13.5)	13.5(1.5~14.0)			
Power Consumption	Cooling	kW	1.74(0.48~2.75)	2.16(0.48~2.83)	2.86(0.65~4.03)	3.90(0.65~4.80)		
- Consumption	Heating	kW	2.00(0.60~3.35)	2.26(0.60~3.43)	2.93(0.70~3.40)	3.25(0.70~3.42)		
EER	Cooling		4.08	3.70	3.50	3.21		
COP	Heating		4.30	4.12	4.10	4.15		
Inrush current		Α	9.2/8.8/8.4	10.4/10.0/9.5	13.3/12.8/12.2	17.7/17.0/16.3		
Sound power level	Cooling	dB(A)	65	66	68	69		
Sourid power level	Heating	dB(A)	66	66	71	72		
Sound pressure level	Cooling	dB(A)	52	54	56	57		
Souria pressure level	Heating	dB(A)	54	54	59	60		
Air flow	Cooling	3/:	56.0	56.0	75.0	75.0		
All llow	Heating	m³/min	56.0	56.0	75.0	82.0		
Exterior dimensions (H×W×D)		mm	750×880	(+73)×340	945×970(+73)×370			
Net weight		kg	6	2	Ş)2		
Refrigerant	Type/GWP			R410A	V/2088			
Kenigerant	Charge	kg/TCO₂Eq	3.15/	6.577	6.0/1	2.528		
Refrigerant piping size	Liquid	Фтт	6.35(1	/4")×2	6.35(1/4")×5	6.35(1/4")×6		
Temgerant piping size	Gas	Ψ111111	9.52(3	/8")×2	9.52(3/8")×5	9.52(3/8")×6		
Outdoor operating	Cooling	°C		-15^	-43			
temperature range	Heating			-15~	-24			
Number of Connectable indoor units			Min.2~Max.4 Min.2~Max.4		Min.4*~Max.5	Min.4*~Max.6		
Total indoor units capacity		kW	12.5	13.5	16.0	19.5		

<sup>The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

Sound level Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

In case of SRK71ZR-S+SRK71ZR-S, 2 Indoor units can be connectable. In case of the combination with SRK-ZSX-S, SRK71ZR-S & FDE50VG, only 3 indoor units can be connectable. The total connecting capacity of indoor units should be between 100 ~ 160.</sup>

INVERTER MULTI-SPLIT MODEL

■ INDOOR UNITS SPECIFICATION FOR MULTI COMBINATIONS

Wall Mounted





Item Model			SRK20ZSX-S	SRK25ZSX-S	SRK35ZSX-S	SRK50ZSX-S	SRK60ZSX-S	
Nominal cooling capaci	ity	kW	2.0	2.5	3.5	5.0	6.0	
Nominal heating capac	ity	kW	3.0	3.4	4.5	5.8	6.8	
Sound power level	Cooling	dB(A)	53	55	58	59	62	
	Heating	dB(A)	53	56	58	62	63	
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	38 / 31 / 24 / 19	39 / 33 / 25 / 19	43 / 35 / 26 / 19	44 / 39 / 31 / 22	46 / 41 / 33 / 22	
Oddila pressure level	Heating(Hi/Me/Lo/Ulo)	dB(A)	38 / 32 / 25 / 19	40 / 34 / 27 / 19	41 / 35 / 28 / 19	46 / 41 / 33 / 23	46 / 42 / 34 / 23	
Air flow	Cooling(Hi/Me/Lo/Ulo)	m³/min	11.3 / 9.1 / 6.0 / 5.0	12.2 / 10.0 / 6.7 / 5.0	13.1 / 10.8 / 7.3 / 5.0	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	
All llow	Heating(Hi/Me/Lo/Ulo)	m-/min	12.2 / 10.3 / 7.2 / 5.4	12.8 / 11.0 / 7.8 / 5.4	13.9 / 11.8 / 8.6 / 5.4	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2	
Exterior dimensions (H	×W×D)	mm	305×920×220					
Net weight		kg	13					
Refrigerant piping size	Liquid / Gas	Фтт	6.35 (1/4") / 9.52 (3/8") 6.35(1/4") / 12.7(1/2")					
Clean filter			Allergen Clear Filter ×1, Photocatalytic Washable Deodorizing Filter ×1					

Wall Mounted





Item		Model	SRK71ZR-S			
Nominal cooling capacity		kW	7.1			
Nominal heating capac	ity	kW	8.0			
Sound power level	Cooling	dB(A)	58			
Sound power level	Heating	dB(A)	60			
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	44 / 41 / 37 / 25			
Couria pressure level	Heating(Hi/Me/Lo/Ulo)	dB(A)	46 / 39 / 35 / 28			
A ! G	Cooling(Hi/Me/Lo/Ulo)	m³/min	20.5 / 18.6 / 16.2 / 10.4			
Air flow	Heating(Hi/Me/Lo/Ulo)	m:/min	25.5 / 19.8 / 17.3 / 13.3			
Exterior dimensions (H	×W×D)	mm	339×1197×262			
Net weight		kg	15.5			
Refrigerant piping size	Liquid / Gas	Фтт	6.35 (1/4") / 15.88 (5/8")			
Clean filter			Allergen Clear Filter ×1, Photocatalytic Washable Deodorizing Filter×1			

Wall Mounted





Item Model			SRK20ZS-S,-SB,-ST	SRK25ZS-S,-SB,-ST	SRK35ZS-S,-SB,-ST	SRK50ZS-S,-SB,-ST	
Nominal cooling capacity kW		2.0	2.5	3.5	5.0		
Nominal heating capac	city	kW	3.0	3.4	4.5	5.8	
Sound power level	Cooling	dB(A)	50	52	56	58	
Souria power level	Heating	dB(A)	52	55	58	59	
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	34 / 25 / 22 / 19	36 / 28 / 23 / 19	40 / 30 / 26 / 19	45 / 36 / 28 / 22	
Souria pressure level	Heating(Hi/Me/Lo/Ulo)	dB(A)	36 / 29 / 23 / 19	39 / 30 / 24 / 19	41 / 36 / 25 / 19	45 / 37 / 31 / 24	
Air flow	Cooling(Hi/Me/Lo/Ulo)	m³/min	9.3 / 7.0 / 5.9 / 5.0	9.9 / 8.0 / 5.9 / 5.0	11.3 / 8.7 / 7.0 / 5.0	12.1 / 9.9 / 7.4 / 5.9	
All llow	Heating(Hi/Me/Lo/Ulo)	m /min	10.0 / 8.5 / 6.5 / 5.9	11.3 / 8.7 / 6.7 / 5.9	12.3 / 11.0 / 7.0 / 5.9	13.9 / 11.2 / 9.1 / 7.4	
Exterior dimensions (H>	(W×D)	mm	290×870×230				
Net weight kg			10.0				
Refrigerant piping size Liquid / Gas Φmm			6.35(1/4") / 12.7(1/2")				
Clean filter			Allerger	Clear Filter × 1. Photocatal	vtic Washable Deodorizing F	ilter × 1	





Item		Model	SKM20ZSP-S	SKM25ZSP-S	SKM35ZSP-S		
Nominal cooling capacity		kW	2.0 2.5		3.5		
Nominal heating capac	ity	kW	3.0	3.4	4.5		
Sound power level	Cooling	dB(A)	58	58	59		
	Heating	dB(A)	56	57	59		
Sound pressure level	Cooling(Hi/Me/Lo)	dB(A)	42 / 35 / 24	43 / 35 / 24	44 / 37 / 24		
Souriu pressure ievei	Heating(Hi/Me/Lo)	dB(A)	41 / 35 / 27	41 / 35 / 27	42 / 37 / 29		
Al- G	Cooling(Hi/Me/Lo)	m³/min	8.5 / 7.0 / 5.0	8.5 / 7.0 / 5.0	9.0 / 7.5 / 5.0		
Air flow	Heating(Hi/Me/Lo)	m [*] /min	8.0 / 7.0 / 5.5	8.0 / 7.0 / 5.5	8.5 / 7.0 / 6.0		
Exterior dimensions (H	×W×D)	mm	262×769×210				
Net weight		kg		7.6			
Refrigerant piping size	Liquid / Gas	Фтт	6.35(1/4")/9.52(3/8")				
Clean filter			_				

NOTES

•The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

•Sound level the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.

SRF-ZMX





Item		Model	SRF25ZMX-S	SRF35ZMX-S	SRF50ZMX-S				
Nominal cooling capac	Nominal cooling capacity		2.5	3.5	5.0				
Nominal heating capac	city	kW	3.4	4.5	5.8				
Sound power level	Cooling	dB(A)	51	52	58				
Souria power level	Heating	dB(A)	51	52	58				
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	40 / 32 / 29 / 26	41 / 34 / 32 / 28	46 / 42 / 35 / 32				
Oddria pressure level	Heating(Hi/Me/Lo/Ulo)	dB(A)	40 / 35 / 33 / 28	41 / 36 / 35 / 31	47 / 41 / 39 / 33				
Air flow	Cooling(Hi/Me/Lo/Ulo)	m³/min	9.0 / 7.6 / 6.7 / 5.8	9.2 / 7.8 / 7.3 / 6.4	11.5 / 9.6 / 7.4 / 6.6				
All llow	Heating(Hi/Me/Lo/Ulo)	/////////	10.5 / 8.2 / 7.7 / 6.6	10.7 / 8.3 / 8.1 / 7.4	12.0 / 10.0 / 9.4 / 7.6				
Exterior dimensions(H	$\times W \times D)$	mm		600×860×238					
Net weight		kg	18	1	9				
Refrigerant piping size	t piping size Liquid / Gas		6.35(1/4") / 9.52(3/8")		6.35(1/4") / 12.7(1/2")				
Clean filter			Allergen Clear Filte	Allergen Clear Filter × 1 Photocatalytic Washable Deodorizing Filter × 1					

Ceiling Concealed

SRR-ZM





Item		Model	SRR25ZM-S	SRR35ZM-S	SRR50ZM-S	SRR60ZM-S	
Nominal cooling capacity		kW	2.5	3.5	5.0	6.0	
Nominal heating capa	city	kW	3.4	4.5	5.8	6.8	
Caund names lavel	Cooling	dB(A)	56	57	59	60	
Sound power level	Heating	dB(A)	59	60	61	63	
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	37 / 33 / 30 / 24	38 / 34 / 31 / 25	41 / 37 / 34 / 29	44 / 38 / 35 / 30	
Souria pressure lever	Heating(Hi/Me/Lo/Ulo)	dB(A)	40 / 37 / 34 / 28	41 / 38 / 35 / 29	43 / 39 / 37 / 32	45 / 41 / 38 / 33	
Air flow	Cooling(Hi/Me/Lo/Ulo)	m³/min	9.5 / 8.5 / 6.5 / 4.5	10.0 / 8.5 / 7.0 / 5.0	13.5 / 11.0 / 10.0 / 7.5	14.5 / 11.5 / 10.5 / 8.0	
All llow	Heating(Hi/Me/Lo/Ulo)	m /min	10.0 / 9.0 / 8.0 / 6.0	10.5 / 9.5 / 8.5 / 6.5	14.5 / 12.5 / 11.0 / 8.5	15.0 / 13.0 / 11.5 / 9.0	
Exterior dimensions(H	$\times W \times D$)	mm	200×75	50×500	200×950×500		
Net weight		kg	20).5	24		
Refrigerant piping size Liquid / Gas		Фтт	6.35(1/4")	/ 9.52(3/8")	6.35(1/4") / 12.7(1/2")		
Bottom air inlet kit (optio	on)		UT-B/	AT1EF	UT-BAT2EF		

4way Ceiling Cassette FDTC-VF





Item		Model	FDTC25VF	FDTC35VF	FDTC50VF	FDTC60VF
Nominal cooling capacity	Nominal cooling capacity			3.5	5.0	6.0
Nominal heating capacity		kW	3.4	4.5	5.8	6.8
Sound power level	Cooling	dB(A)	56	58	60	60
Sound power level	Heating	dB(A)	56	58	60	60
Sound pressure level **	Cooling(Hi/Me/Lo)	dB(A)	36 / 32 / 29	40 / 36 / 30	42 / 36 / 30	46 / 39 / 30
	Heating(Hi/Me/Lo)	dB(A)	38 / 33 / 29.5	42 / 35 / 32	42 / 36 / 32	46 / 39 / 32
Air flow	Cooling(Hi/Me/Lo)	m³/min	9.0 / 8.0 / 6.5	9.5 / 9.0 / 7.0	11.5 / 9.0 / 7.0	13.5 / 10.0 / 7.0
All llow	Heating(Hi/Me/Lo)	11117/111111	9.5 / 8.5 / 7.0	10.0 / 9.0 / 8.0	11.5 / 9.0 / 8.0	13.5 / 10.0 / 8.0
Exterior dimensions	Main unit	mm		248×5	70×570	
$(H\times W\times D)$	Panel	mm		35×70	0×700	
Net weight		kg		Unit.15	Panel:3.5	
Refrigerant piping size	Liquid / Gas	Фтт	6.35(1/4") / 9.52(3/8") 6.35(1/4") / 12.7(1/2")			/ 12.7(1/2")
Panel				TC-PSA	-25W-E	

[%] Powerful-Hi can be selected. Sound level dB(A):25VF(Cooling:38 Heating:39), 35VF(Cooling:41 Heating:43), 50/60VF(Cooling:47 Heating:47), Air flow m³/min:25VF(Cooling:10 Heating:10.5), 35VF(Cooling:11 Heating:11.5), 50/60VF(Cooling:13.5 Heating:13.5)

Duct Connected-Low/Middle Static Pressure / Ceiling Suspended FDUM-VF / FDE-VG









	<i>-</i>		- (Option)	(Option)
Item		Model	FDUM50VF	FDE50VG
Nominal cooling capaci	ty	kW	5.0	5.0
Nominal heating capaci	ty	kW	5.8	5.8
Sound power level	Cooling	dB(A)	60	60
Oddria power iever	Heating	dB(A)	60	60
Sound pressure level *	Cooling(Hi/Me/Lo)	dB(A)	32 / 29 / 26	38/ 36/ 31
Oddila pressure level	Heating(Hi/Me/Lo)	dB(A)	32 / 29 / 26	38/ 36/ 31
Air flow	Cooling(Hi/Me/Lo)	m³/min	10.0 / 9.0 / 8.0	10.0 / 9.0 / 7.0
All llow	Heating(Hi/Me/Lo)	m ⁻ /min	10.0 / 9.0 / 8.0	10.0 / 9.0 / 7.0
Exterior dimensions (H	\times W \times D)	mm	280×750×635	210×1070×690
Net weight		kg	29	28
Refrigerant piping size	Liquid / Gas	Фтт	6.35(1/4") / 12.7(1/2")	6.35(1/4") / 12.7(1/2")
Air filter			Filter KIT : UM-FL1EF (option)	Pocket Plastic net × 2 (Washable)

** Powerful-Hi can be selected. [FDUM] Sound pressure level dB(A):Cooling:37 Heating:37, Air flow:13m³/min [FDE] Sound pressure level:Cooling dB(A):46 Heating:46, Air flow:13m³/min

INVERTER MULTI-SPLIT MODEL

SCM40ZS-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

				Heatin	g capacity	/ (kW)		Power	consumpti	on(W)	Stan	dard curre	nt(A)
	Indoor	unit combination	Room heati	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	230V	240 V
	4*1	20	3.0	-	1.3	3.0	3.7	520	750	1070	3.7	3.5	3.4
ation	room	25	3.4	-	1.3	3.4	4.2	520	920	1210	4.5	4.3	4.1
rati	100111	35	4.5	-	1.3	4.5	5.0	520	1210	1450	5.9	5.6	5.4
obe		20 + 20	2.25	2.25	2.0	4.5	6.3	550	900	1700	4.4	4.2	4.0
	2*2	20 + 25	2.36	2.94	2.0	5.3	6.3	550	1150	1700	5.4	5.2	5.0
eating	room	20 + 35	2.11	3.69	2.0	5.8	6.3	550	1290	1700	6.0	5.8	5.5
운	100111	25 + 25	2.90	2.90	2.0	5.8	6.3	550	1290	1700	6.0	5.8	5.5
		25 + 35	2.42	3.38	2.0	5.8	6.3	550	1290	1700	6.0	5.8	5.5

The values are for 1 indoor unit (*1) and 2 indoor units (*2) operation. The same hereinafter.

				Coolir	ng capacity	/ (kW)		Power	consumpti	on(W)	Stan	dard curre	nt(A)
	Indoor	r unit combination	Room cooli	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	230V	240 V
	4	20	2.0	-	1.5	2.0	2.8	560	590	880	2.9	2.8	2.7
6	room	25	2.5	-	1.5	2.5	3.4	560	670	1040	3.3	3.2	3.1
rati	100111	35	3.5	-	1.5	3.5	3.9	560	970	1200	4.8	4.6	4.4
g		20 + 20	2.00	2.00	3.0	4.0	5.7	600	840	1750	4.2	4.0	3.8
ling o		20 + 25	2.00	2.50	3.0	4.5	5.9	600	1040	2030	5.0	4.8	4.6
≒		20 + 35	1.89	3.31	3.0	5.2	5.9	600	1430	2030	6.7	6.4	6.2
ဒ	room	25 + 25	2.50	2.50	3.0	5.0	5.9	600	1280	2030	6.1	5.8	5.6
		25 + 35	2.17	3.03	3.0	5.2	5.9	600	1430	2030	6.7	6.4	6.2

SCM40ZS-S Table of Indoor unit combination with all indoor unit SKM-ZSP-S type only

				Heatir	ng capacity	/ (kW)		Power	consumpti	ion(W)	Stan	dard curre	nt(A)
	Indoo	r unit combination	Room heati	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	240 V
	4	20	3.0	-	1.3	3.0	3.5	520	950	1070	4.6	4.4	4.2
tion	room	25	3.4	-	1.3	3.4	4.0	520	1020	1210	5.0	4.8	4.6
rati	100111	35	4.5	-	1.3	4.5	4.8	520	1390	1450	6.8	6.5	6.2
g		20 + 20	2.25	2.25	2.0	4.5	6.1	550	1020	1700	5.0	4.8	4.6
g		20 + 25	2.36	2.94	2.0	5.3	6.1	550	1310	1700	6.2	5.9	5.7
aţi	Z Z	20 + 35	2.11	3.69	2.0	5.8	6.1	550	1400	1700	6.5	6.3	6.0
£	room	25 + 25	2.90	2.90	2.0	5.8	6.1	550	1400	1700	6.5	6.3	6.0
		25 + 35	2.42	3.38	2.0	5.8	6.1	550	1400	1700	6.5	6.3	6.0

				Coolir	g capacity	/ (kW)		Power	consumpti	ion(W)	Stan	dard curre	nt(A)
	Indoor	unit combination	Room cooli	ng capacity	Т	otal capacit	:y	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Stariuaru	Wax.	2200	2300	240 V
	4	20	2.0	-	1.5	2.0	2.7	560	650	880	3.2	3.1	3.0
on	room	25	2.5	-	1.5	2.5	3.2	560	830	1040	4.1	4.0	3.8
rat	100111	35	3.5	-	1.5	3.5	3.7	560	1100	1200	5.5	5.2	5.0
be		20 + 20	2.00	2.00	3.0	4.0	5.6	600	1050	1750	5.2	5.0	4.8
ing	,	20 + 25	2.00	2.50	3.0	4.5	5.8	600	1300	2030	6.3	6.0	5.8
i	room	20 + 35	1.89	3.31	3.0	5.2	5.8	600	1600	2030	7.5	7.2	6.9
ဝိ	100111	25 + 25	2.50	2.50	3.0	5.0	5.8	600	1420	2030	6.7	6.4	6.2
		25 + 35	2.17	3.03	3.0	5.2	5.8	600	1600	2030	7.5	7.2	6.9

SCM40ZS-S Table of Indoor unit combination with other indoor unit

				Heatir	g capacity	/ (kW)		Power	consumpti	on(W)	Stan	dard curre	nt(A)
	Indooi	r unit combination	Room heati	ng capacity	Т	otal capacit	ty	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	230V	240 V
	4	20	3.0	-	1.3	3.0	3.5	520	900	1070	4.4	4.2	4.0
tion	room	25	3.4	-	1.3	3.4	4.0	520	1070	1210	5.2	5.0	4.8
rati	100111	35	4.5	-	1.3	4.5	4.8	520	1340	1450	6.5	6.3	6.0
g		20 + 20	2.25	2.25	2.0	4.5	6.1	550	930	1700	4.5	4.3	4.2
g		20 + 25	2.36	2.94	2.0	5.3	6.1	550	1240	1700	5.9	5.6	5.4
leating	room	20 + 35	2.11	3.69	2.0	5.8	6.1	550	1330	1700	6.2	5.9	5.7
He	100111	25 + 25	2.90	2.90	2.0	5.8	6.1	550	1330	1700	6.2	5.9	5.7
		25 + 35	2.42	3.38	2.0	5.8	6.1	550	1330	1700	6.2	5.9	5.7

				Coolin	g capacity	/ (kW)		Power	r consumpti	on(W)	Stan	dard curre	nt(A)
	Indoor	unit combination	Room cooli	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	240 V
	4	20	2.0	-	1.5	2.0	2.7	560	620	880	3.1	3.0	2.8
on	room	25	2.5	-	1.5	2.5	3.2	560	710	1040	3.5	3.4	3.2
rati	100111	35	3.5	-	1.5	3.5	3.7	560	1030	1200	5.1	4.9	4.7
be		20 + 20	2.00	2.00	3.0	4.0	5.6	600	880	1750	4.4	4.2	4.0
Cooling operation	_	20 + 25	2.00	2.50	3.0	4.5	5.8	600	1090	2030	5.3	5.0	4.8
ij	Z Z	20 + 35	1.89	3.31	3.0	5.2	5.8	600	1500	2030	7.0	6.7	6.5
ပိ	room	25 + 25	2.50	2.50	3.0	5.0	5.8	600	1340	2030	6.4	6.1	5.8
		25 + 35	2.17	3.03	3.0	5.2	5.8	600	1500	2030	7.0	6.7	6.5

COMBINATIONS

SCM45ZS-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

				Heatin	ng capacity	(kW)		Power	consumpti	on(W)	Stan	dard curre	nt(A)
	Indooi	r unit combination	Room heati	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	2400
	4	20	3.0	-	1.3	3.0	3.7	520	750	1070	3.7	3.5	3.4
_	room	25	3.4	-	1.3	3.4	4.2	520	920	1210	4.5	4.3	4.1
ration	100111	35	4.5	-	1.3	4.5	5.0	520	1210	1450	5.9	5.6	5.4
ers		20 + 20	2.25	2.25	2.0	4.5	6.5	550	900	1900	4.4	4.2	4.0
obe		20 + 25	2.36	2.94	2.0	5.3	6.5	550	1150	1900	5.4	5.2	5.0
leating	2	20 + 35	2.18	3.82	2.0	6.0	6.5	550	1500	1900	6.9	6.6	6.3
eat	room	25 + 25	3.00	3.00	2.0	6.0	6.5	550	1500	1900	6.9	6.6	6.3
I		25 + 35	2.50	3.50	2.0	6.0	6.5	550	1500	1900	6.9	6.6	6.3
		35 + 35	3.00	3.00	2.0	6.0	6.5	550	1500	1900	6.9	6.6	6.3

				Coolir	ng capacity	/ (kW)		Power	consumpti	on(W)	Stan	dard curre	nt(A)
	Indoo	r unit combination	Room heati	ng capacity	Т	otal capacit	Э	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIII.	Standard	wax.	220V	230V	240V
	_	20	2.0	-	1.5	2.0	2.8	560	590	880	2.9	2.8	2.7
_	room	25	2.5	-	1.5	2.5	3.4	560	670	1040	3.3	3.2	3.1
ation	TOOM	35	3.5	-	1.5	3.5	3.9	560	970	1200	4.8	4.6	4.4
ers		20 + 20	2.00	2.00	3.0	4.0	5.7	600	840	1750	4.2	4.0	3.8
ŏ		20 + 25	2.00	2.50	3.0	4.5	5.9	600	1040	2030	5.0	4.8	4.6
ling	2	20 + 35	2.00	3.50	3.0	5.5	6.3	600	1490	2160	7.0	6.7	6.4
8	room	25 + 25	2.50	2.50	3.0	5.0	6.2	600	1280	2110	6.1	5.8	5.6
O		25 + 35	2.42	3.38	3.0	5.8	6.4	600	1740	2200	8.0	7.6	7.3
		35 + 35	2.90	2.90	3.0	5.8	6.4	600	1740	2200	8.0	7.6	7.3

SCM45ZS-S Table of Indoor unit combination with all indoor unit SKM-ZSP-S type only

				Heatin	g capacity	/ (kW)		Power	r consumpti	on(W)	Stan	dard curre	nt(A)
	Indooi	r unit combination	Room heati	ng capacity	T	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	2400
	4	20	3.0	-	1.3	3.0	3.5	520	950	1070	4.6	4.4	4.2
e e	room	25	3.4	-	1.3	3.4	4.0	520	1020	1210	5.0	4.8	4.6
읉	100111	35	4.5	-	1.3	4.5	4.8	520	1390	1450	6.8	6.5	6.2
operation		20 + 20	2.25	2.25	2.0	4.5	6.3	550	1020	1900	5.0	4.8	4.6
		20 + 25	2.36	2.94	2.0	5.3	6.3	550	1310	1900	6.4	6.1	5.9
ing	2	20 + 35	2.18	3.82	2.0	6.0	6.3	550	1600	1900	7.3	7.0	6.7
leating	room	25 + 25	3.00	3.00	2.0	6.0	6.3	550	1600	1900	7.3	7.0	6.7
I		25 + 35	2.50	3.50	2.0	6.0	6.3	550	1600	1900	7.3	7.0	6.7
		35 + 35	3.00	3.00	2.0	6.0	6.3	550	1600	1900	7.3	7.0	6.7

				Coolir	ng capacity	/ (kW)		Power	consumpti	ion(W)	Stan	dard curre	nt(A)
	Indoor	unit combination	Room heati	ng capacity	Т	otal capacit	:y	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	240V
	4	20	2.0	-	1.5	2.0	2.7	560	650	880	3.2	3.1	3.0
_	room	25	2.5	-	1.5	2.5	3.2	560	830	1040	4.1	4.0	3.8
operation	100111	35	3.5	-	1.5	3.5	3.7	560	1100	1200	5.5	5.2	5.0
er.		20 + 20	2.00	2.00	3.0	4.0	5.6	600	1050	1750	5.2	5.0	4.8
		20 + 25	2.00	2.50	3.0	4.5	5.8	600	1300	2030	6.3	6.0	5.8
Cooling	2	20 + 35	2.00	3.50	3.0	5.5	6.2	600	1650	2160	7.7	7.4	7.1
00	room	25 + 25	2.50	2.50	3.0	5.0	6.1	600	1380	2110	6.5	6.3	6.0
S		25 + 35	2.42	3.38	3.0	5.8	6.3	600	1900	2200	8.7	8.3	8.0
0		35 + 35	2.90	2.90	3.0	5.8	6.3	600	1900	2200	8.7	8.3	8.0

SCM45ZS-S Table of Indoor unit combination with other indoor unit

				Heatin	ng capacity	(kW)		Power	consumpti	on(W)	Stan	dard curre	nt(A)
	Indooi	r unit combination	Room heati	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	240V
	4	20	3.0	-	1.3	3.0	3.5	520	900	1070	4.4	4.2	4.0
u	room	25	3.4	-	1.3	3.4	4.0	520	1070	1210	5.2	5.0	4.8
atio		35	4.5	-	1.3	4.5	4.8	520	1340	1450	6.5	6.3	6.0
er3		20 + 20	2.25	2.25	2.0	4.5	6.3	550	930	1900	4.5	4.3	4.2
ŏ		20 + 25	2.36	2.94	2.0	5.3	6.3	550	1240	1900	6.0	5.8	5.5
ıting	2	20 + 35	2.18	3.82	2.0	6.0	6.3	550	1550	1900	7.1	6.8	6.5
eat	room	25 + 25	3.00	3.00	2.0	6.0	6.3	550	1550	1900	7.1	6.8	6.5
I		25 + 35	2.50	3.50	2.0	6.0	6.3	550	1550	1900	7.1	6.8	6.5
		35 + 35	3.00	3.00	2.0	6.0	6.3	550	1550	1900	7.1	6.8	6.5

				Coolir	ng capacity	/ (kW)		Power	consumpti	on(W)	Standard current(A)			
	Indooi	r unit combination	Room heati	ng capacity	Т	otal capacit	у	Min.	Standard	Max.	220V	230V	240V	
			Α	В	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	240V	
	4	20	2.0	-	1.5	2.0	2.7	560	620	880	3.1	3.0	2.8	
E	room	25	2.5	-	1.5	2.5	3.2	560	710	1040	3.5	3.4	3.2	
atio	100111	35	3.5	-	1.5	3.5	3.7	560	1030	1200	5.1	4.9	4.7	
opera		20 + 20	2.00	2.00	3.0	4.0	5.6	600	880	1750	4.4	4.2	4.0	
		20 + 25	2.00	2.50	3.0	4.5	5.8	600	1090	2030	5.3	5.0	4.8	
ooling	2	20 + 35	2.00	3.50	3.0	5.5	6.2	600	1560	2160	7.3	7.0	6.7	
00	room	25 + 25	2.50	2.50	3.0	5.0	6.1	600	1340	2110	6.4	6.1	5.8	
S		25 + 35	2.42	3.38	3.0	5.8	6.3	600	1820	2200	8.4	8.0	7.7	
		35 + 35	2.90	2.90	3.0	5.8	6.3	600	1820	2200	8.4	8.0	7.7	

INVERTER MULTI-SPLIT MODEL

SCM50ZS-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

				Н	leating cap	pacity (kl	N)		Power	consumpti	ion(W)	Stan	dard curre	nt(A)
	Indoor	unit combination	Room	heating ca	apacity	Т	otal capaci	ty	Min.	Standard	Max.	220V	230V	240V
			Α	В	С	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	230V	240V
		20	3.0	-	-	1.4	3.0	3.7	480	820	1100	4.1	3.9	3.7
	1	25	3.4	-	-	1.4	3.4	4.2	480	980	1240	4.9	4.7	4.5
	room	35	4.5	-	-	1.4	4.5	5.0	480	1280	1490	6.3	6.0	5.8
		50	5.8	-	-	1.4	5.8	6.2	480	1740	2260	8.0	7.6	7.3
		20 + 20	2.95	2.95	-	2.0	5.9	7.3	540	1480	2580	7.1	6.8	6.5
		20 + 25	2.67	3.33	-	2.0	6.0	7.3	540	1530	2580	7.3	6.9	6.7
	2	20 + 35	2.29	4.01	-	2.0	6.3	7.3	540	1620	2580	7.6	7.2	6.9
on		20 + 50	1.89	4.71	-	2.0	6.6	7.3	540	1710	2580	7.9	7.5	7.2
rati		25 + 25	3.05	3.05	-	2.0	6.1	7.3	540	1560	2580	7.4	7.0	6.8
operation	room	25 + 35	2.67	3.73	-	2.0	6.4	7.3	540	1650	2580	7.7	7.3	7.0
g		25 + 50	2.20	4.40	-	2.0	6.6	7.3	540	1710	2580	7.9	7.5	7.2
Heating		35 + 35	3.30	3.30	-	2.0	6.6	7.3	540	1710	2580	7.9	7.5	7.2
운		35 + 50	2.72	3.88	-	2.0	6.6	7.3	540	1710	2580	7.9	7.5	7.2
		20 + 20 + 20	2.00	2.00	2.00	3.0	6.0	7.5	600	1240	2580	6.2	5.9	5.7
		20 + 20 + 25	1.91	1.91	2.38	3.0	6.2	7.5	600	1400	2580	6.8	6.5	6.2
	3	20 + 20 + 35	1.76	1.76	3.08	3.0	6.6	7.5	600	1560	2580	7.4	7.0	6.8
	room	20 + 25 + 25	1.83	2.29	2.29	3.0	6.4	7.5	600	1470	2580	7.0	6.7	6.5
	100111	20 + 25 + 35	1.70	2.13	2.98	3.0	6.8	7.5	600	1620	2580	7.6	7.2	6.9
		25 + 25 + 25	2.20	2.20	2.20	3.0	6.6	7.5	600	1560	2580	7.4	7.0	6.8
		25 + 25 + 35	2.06	2.06	2.88	3.0	7.0	7.5	600	1690	2580	7.8	7.5	7.2

				С	ooling cap	pacity (k)	N)		Power	consumpti	ion(W)	Standard current(A)		
- In	ndooi	runit combination	Room	cooling ca	apacity	Т	otal capaci	ty	Min.	Standard	Max.	220V	230V	240V
			Α	В	С	Min.	Standard	Max.	IVIII.	Standard	wax.	220V	230V	240V
		20	2.0	-	-	1.8	2.0	2.8	500	550	900	2.7	2.6	2.5
	1	25	2.5	-	-	1.8	2.5	3.4	500	720	1070	3.6	3.4	3.3
	room	35	3.5	-	-	1.8	3.5	3.9	500	1080	1230	5.4	5.1	4.9
		50	5.0	-	-	1.8	5.0	5.5	500	1700	2000	8.0	7.6	7.3
		20 + 20	2.00	2.00	-	3.0	4.0	5.7	570	910	1800	4.5	4.3	4.2
		20 + 25	1.91	2.39	-	3.0	4.3	5.9	570	1070	1980	5.3	5.1	4.9
	2	20 + 35	1.82	3.18	-	3.0	5.0	6.2	570	1430	2070	6.9	6.6	6.3
io.		20 + 50	1.71	4.29	-	3.0	6.0	6.5	570	1960	2150	9.0	8.6	8.2
operation	room	25 + 25	2.35	2.35	-	3.0	4.7	6.2	570	1270	2070	6.2	5.9	5.7
g '	COIII	25 + 35	2.21	3.09	-	3.0	5.3	6.5	570	1600	2150	7.6	7.2	6.9
		25 + 50	2.00	4.00	-	3.0	6.0	6.5	570	1960	2150	9.0	8.6	8.2
Cooling		35 + 35	3.00	3.00	-	3.0	6.0	6.5	570	1960	2150	9.0	8.6	8.2
ပို		35 + 50	2.47	3.53	-	3.0	6.0	6.5	570	1960	2150	9.0	8.6	8.2
		20 + 20 + 20	1.67	1.67	1.67	3.4	5.0	7.1	690	1050	2150	5.2	5.0	4.8
		20 + 20 + 25	1.60	1.60	2.00	3.4	5.2	7.1	690	1160	2150	5.7	5.5	5.2
	3	20 + 20 + 35	1.49	1.49	2.61	3.4	5.6	7.1	690	1330	2150	6.5	6.2	5.9
	room	20 + 25 + 25	1.54	1.93	1.93	3.4	5.4	7.1	690	1260	2150	6.2	5.9	5.6
	OUIII	20 + 25 + 35	1.45	1.81	2.54	3.4	5.8	7.1	690	1430	2150	6.9	6.6	6.3
		25 + 25 + 25	1.87	1.87	1.87	3.4	5.6	7.1	690	1330	2150	6.5	6.2	5.9
		25 + 25 + 35	1.76	1.76	2.47	3.4	6.0	7.1	690	1490	2150	7.1	6.8	6.5

SCM50ZS-S Table of Indoor unit combination with all indoor unit SKM-ZSP-S type only

				Н	leating ca	pacity (kl	N)		Power	consumpt	ion(W)	Stan	dard curre	nt(A)
	Indoo	r unit combination	Room	heating ca	apacity	T	otal capaci	ty	Min.	Ctandand	Max.	220V	230V	240V
			Α	В	С	Min.	Standard	Max.	IVIII.	Standard	wax.	220V	230V	240V
	1	20	3.0	-	-	1.4	3.0	3.5	480	1040	1100	5.2	4.9	4.7
	room	25	3.4	-	-	1.4	3.4	4.0	480	1200	1240	6.0	5.7	5.5
	100111	35	4.5	-	-	1.4	4.5	4.8	480	1490	1490	7.4	7.0	6.7
		20 + 20	2.95	2.95	-	2.0	5.9	7.0	540	1530	2580	7.3	7.0	6.7
	2 room	20 + 25	2.67	3.33	-	2.0	6.0	7.0	540	1580	2580	7.5	7.2	6.9
e		20 + 35	2.29	4.01	-	2.0	6.3	7.0	540	1670	2580	7.8	7.5	7.2
operation		25 + 25	3.05	3.05	-	2.0	6.1	7.0	540	1610	2580	7.6	7.3	7.0
ed		25 + 35	2.67	3.73	-	2.0	6.4	7.0	540	1700	2580	7.9	7.6	7.3
		35 + 35	3.30	3.30	-	2.0	6.6	7.0	540	1760	2580	8.1	7.8	7.4
Heating		20 + 20 + 20	2.00	2.00	2.00	3.0	6.0	7.3	600	1360	2580	6.8	6.5	6.2
운		20 + 20 + 25	1.91	1.91	2.38	3.0	6.2	7.3	600	1450	2580	7.0	6.7	6.4
	3	20 + 20 + 35	1.76	1.76	3.08	3.0	6.6	7.3	600	1620	2580	7.6	7.3	7.0
	room	20 + 25 + 25	1.83	2.29	2.29	3.0	6.4	7.3	600	1530	2580	7.3	7.0	6.7
	room	20 + 25 + 35	1.70	2.13	2.98	3.0	6.8	7.3	600	1680	2580	7.9	7.5	7.2
		25 + 25 + 25	2.20	2.20	2.20	3.0	6.6	7.3	600	1620	2580	7.6	7.3	7.0
		25 + 25 + 35	2.06	2.06	2.88	3.0	7.0	7.3	600	1750	2580	8.1	7.7	7.4

COMBINATIONS

			С	ooling ca	pacity (kl	N)		Power	consumpt	ion(W)	Standard current(A)			
Indo	or unit combination	Room	cooling ca	apacity	Т	otal capaci	ty	Min.	Standard	Max.	220V	230V	240V	
		Α	В	С	Min.	Standard	Max.	IVIIII.	Standard	IVIAX.	2200	2300	240 V	
	20	2.0	-	-	1.8	2.0	2.7	500	610	900	3.0	2.9	2.8	
"1	25	2.5	-	-	1.8	2.5	3.2	500	800	1070	4.0	3.8	3.7	
roor	35	3.5	-	-	1.8	3.5	3.7	500	1170	1230	5.8	5.6	5.3	
	20 + 20	2.00	2.00	-	3.0	4.0	5.6	570	1000	1800	5.0	4.8	4.6	
	20 + 25	1.91	2.39	-	3.0	4.3	5.8	570	1150	1980	5.7	5.5	5.2	
rooi	20 + 35	1.82	3.18	-	3.0	5.0	6.1	570	1530	2070	7.4	7.0	6.7	
tooi	n 25 + 25	2.35	2.35	-	3.0	4.7	6.1	570	1520	2070	7.4	7.1	6.8	
obe	25 + 35	2.21	3.09	-	3.0	5.3	6.3	570	1720	2150	8.1	7.8	7.5	
	35 + 35	3.00	3.00	-	3.0	6.0	6.3	570	2050	2150	9.4	9.0	8.6	
Cooling	20 + 20 + 20	1.67	1.67	1.67	3.4	5.0	6.9	690	1160	2150	5.8	5.5	5.3	
3	20 + 20 + 25	1.60	1.60	2.00	3.4	5.2	6.9	690	1250	2150	6.2	5.9	5.6	
3	20 + 20 + 35	1.49	1.49	2.61	3.4	5.6	6.9	690	1400	2150	6.8	6.5	6.2	
rooi	20 + 25 + 25	1.54	1.93	1.93	3.4	5.4	6.9	690	1350	2150	6.6	6.3	6.0	
1001	20 + 25 + 35	1.45	1.81	2.54	3.4	5.8	6.9	690	1500	2150	7.2	6.9	6.6	
	25 + 25 + 25	1.87	1.87	1.87	3.4	5.6	6.9	690	1400	2150	6.8	6.5	6.2	
	25 + 25 + 35	1.76	1.76	2.47	3.4	6.0	6.9	690	1600	2150	7.7	7.3	7.0	

SCM50ZS-S Table of Indoor unit combination with other indoor unit

			Н	leating cap	pacity (k)	W)		Power	consumpt	ion(W)	Stan	dard curre	nt(A)
Indoo	r unit combination	Room	heating ca	apacity	Т	otal capaci	ty	Min.	Standard	Max.	220V	230V	240V
		Α	В	С	Min.	Standard	Max.	IVIII.	Standard	wax.	220V	230V	240V
	20	3.0	-	-	1.4	3.0	3.5	480	1020	1100	5.1	4.9	4.6
1	25	3.4	-	-	1.4	3.4	4.0	480	1180	1240	5.9	5.6	5.4
room	35	4.5	-	-	1.4	4.5	4.8	480	1470	1490	7.3	6.9	6.7
	50	5.8	-	-	1.4	5.8	6.0	480	1910	2260	8.8	8.4	8.0
	20 + 20	2.95	2.95	-	2.0	5.9	7.0	540	1510	2580	7.2	6.9	6.6
	20 + 25	2.67	3.33	-	2.0	6.0	7.0	540	1560	2580	7.4	7.1	6.8
	20 + 35	2.29	4.01	-	2.0	6.3	7.0	540	1650	2580	7.7	7.4	7.1
2	20 + 50	1.89	4.71	-	2.0	6.6	7.0	540	1740	2580	8.0	7.7	7.4
2 room	25 + 25	3.05	3.05	-	2.0	6.1	7.0	540	1590	2580	7.5	7.2	6.9
2 100111	25 + 35	2.67	3.73	-	2.0	6.4	7.0	540	1680	2580	7.8	7.5	7.2
20	25 + 50	2.20	4.40	-	2.0	6.6	7.0	540	1740	2580	8.0	7.7	7.4
D D	35 + 35	3.30	3.30	-	2.0	6.6	7.0	540	1740	2580	8.0	7.7	7.4
_	35 + 50	2.72	3.88	-	2.0	6.6	7.0	540	1740	2580	8.0	7.7	7.4
	20 + 20 + 20	2.00	2.00	2.00	3.0	6.0	7.3	600	1340	2580	6.7	6.4	6.1
	20 + 20 + 25	1.91	1.91	2.38	3.0	6.2	7.3	600	1430	2580	6.9	6.6	6.4
3	20 + 20 + 35	1.76	1.76	3.08	3.0	6.6	7.3	600	1600	2580	7.6	7.2	6.9
room	20 + 25 + 25	1.83	2.29	2.29	3.0	6.4	7.3	600	1510	2580	7.2	6.9	6.6
100111	20 + 25 + 35	1.70	2.13	2.98	3.0	6.8	7.3	600	1660	2580	7.8	7.4	7.1
	25 + 25 + 25	2.20	2.20	2.20	3.0	6.6	7.3	600	1600	2580	7.6	7.2	6.9
	25 + 25 + 35	2.06	2.06	2.88	3.0	7.0	7.3	600	1730	2580	8.0	7.7	7.3

			С	ooling ca	pacity (kl	N)		Power	consumpt	ion(W)	Stan	dard curre	nt(A)
Indoo	r unit combination	Room	cooling ca	apacity	Т	otal capaci	ty	8.01	04		0001/	0001/	0.401/
		Α	В	С	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
	20	2.0	-	-	1.8	2.0	2.7	500	580	900	2.9	2.8	2.6
1	25	2.5	-	-	1.8	2.5	3.2	500	760	1070	3.8	3.6	3.5
room	35	3.5	-	-	1.8	3.5	3.7	500	1140	1230	5.7	5.4	5.2
	50	5.0	-	-	1.8	5.0	5.3	500	1790	2000	8.4	8.0	7.7
	20 + 20	2.00	2.00	-	3.0	4.0	5.6	570	950	1800	4.7	4.5	4.3
	20 + 25	1.91	2.39	-	3.0	4.3	5.8	570	1110	1980	5.5	5.3	5.1
	20 + 35	1.82	3.18	-	3.0	5.0	6.1	570	1490	2070	7.2	6.9	6.6
<u> </u>	20 + 50	1.71	4.29	-	3.0	6.0	6.3	570	2040	2150	9.4	9.0	8.6
2 room	25 + 25	2.35	2.35	-	3.0	4.7	6.1	570	1320	2070	6.4	6.2	5.9
9 100111	25 + 35	2.21	3.09	-	3.0	5.3	6.3	570	1660	2150	7.9	7.5	7.2
	25 + 50	2.00	4.00	-	3.0	6.0	6.3	570	2040	2150	9.4	9.0	8.6
Cooling	35 + 35	3.00	3.00	-	3.0	6.0	6.3	570	2040	2150	9.4	9.0	8.6
ဒ္ဓို	35 + 50	2.47	3.53	-	3.0	6.0	6.3	570	2040	2150	9.4	9.0	8.6
	20 + 20 + 20	1.67	1.67	1.67	3.4	5.0	6.9	690	1120	2150	5.6	5.3	5.1
	20 + 20 + 25	1.60	1.60	2.00	3.4	5.2	6.9	690	1200	2150	5.9	5.7	5.4
3	20 + 20 + 35	1.49	1.49	2.61	3.4	5.6	6.9	690	1370	2150	6.6	6.4	6.1
	20 + 25 + 25	1.54	1.93	1.93	3.4	5.4	6.9	690	1300	2150	6.3	6.1	5.8
room	20 + 25 + 35	1.45	1.81	2.54	3.4	5.8	6.9	690	1470	2150	7.1	6.8	6.5
	25 + 25 + 25	1.87	1.87	1.87	3.4	5.6	6.9	690	1370	2150	6.6	6.4	6.1
	25 + 25 + 35	1.76	1.76	2.47	3.4	6.0	6.9	690	1540	2150	7.4	7.0	6.8

INVERTER MULTI-SPLIT MODEL

SCM60ZM-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

	l a	ndoor unit			Heating cap	pacity (kW)		Power	consumpt	tion (W)	Stand	lard curre	nt (A)
		mbination	Room he	ating capa	city (kW)	Tot	al capacity	(kW)	Min.	Standard	Mov	220V	230V	240V
	CO	mbination	A room	B room	C room	Min.	Standard	Max.			Max.	220V		
		20	3.0	_	_	1.5	3.0	3.7	600	780	1330	3.6	3.4	3.3
	1	25	3.4	_	_	1.5	3.4	4.2	600	950	1510	4.4	4.2	4.0
	room	35	4.5	_	_	1.5	4.5	5.0	600	1290	1790	5.9	5.7	5.4
	100111	50	5.8	_	_	1.5	5.8	6.4	600	1780	2310	8.2	7.8	7.5
		60	6.8	_	_	1.5	6.8	7.3	600	2120	2660	9.7	9.3	8.9
		20 + 20	3.00	3.00	_	2.1	6.0	7.3	630	1490	2100	6.8	6.5	6.3
		20 + 25	2.71	3.39	_	2.1	6.1	7.5	630	1570	2550	7.2	6.9	6.6
		20 + 35	2.36	4.14	_	2.1	6.5	7.6	630	1680	3000	7.7	7.4	7.1
		20 + 50	2.00	5.00	_	2.1	7.0	7.6	630	1900	3000	8.7	8.3	8.0
		20 + 60	1.78	5.33	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
		25 + 25	3.15	3.15	_	2.1	6.3	7.6	630	1630	3000	7.5	7.2	6.9
	2	25 + 35	2.79	3.91	_	2.1	6.7	7.6	630	1760	3000	8.1	7.7	7.4
	room	25 + 50	2.37	4.73	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
		25 + 60	2.09	5.01	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
		35 + 35	3.50	3.50	_	2.1	7.0	7.6	630	1900	3000	8.7	8.3	8.0
Heating operation		35 + 50	2.92	4.18	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
ati		35 + 60	2.62	4.48	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
9		50 + 50	3.55	3.55	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
ᅙ		50 + 60	3.23	3.87	_	2.1	7.1	7.6	630	1940	3000	8.9	8.5	8.2
ing		20 + 20 + 20	2.20	2.20	2.20	3.2	6.6	7.8	660	1350	3000	6.4	6.1	5.9
at		20 + 20 + 25	2.06	2.06	2.58	3.2	6.7	7.8	660	1390	3000	6.6	6.3	6.0
Ĭ		20 + 20 + 35	1.81	1.81	3.17	3.2	6.8	7.8	660	1510	3000	7.1	6.8	6.6
		20 + 20 + 50	1.56	1.56	3.89	3.2	7.0	7.8	660	1690	3000	8.0	7.7	7.3
		20 + 20 + 60	1.44	1.44	4.32	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1
		20 + 25 + 25	1.94	2.43	2.43	3.2	6.8	7.8	660	1510	3000	7.1	6.8	6.6
		20 + 25 + 35	1.73	2.16	3.02	3.2	6.9	7.8	660	1560	3000	7.4	7.1	6.8
		20 + 25 + 50	1.49	1.87	3.74	3.2	7.1	7.8	660	1740	3000	8.2	7.9	7.6
		20 + 25 + 60	1.37	1.71	4.11	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1
	3	20 + 35 + 35	1.56	2.72	2.72	3.2	7.0	7.8	660	1690	3000	8.0	7.7	7.3
	room	20 + 35 + 50	1.37	2.40	3.43	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1
		25 + 25 + 25	2.27	2.27	2.27	3.2	6.8	7.8	660	1510	3000	7.1	6.8	6.6
		25 + 25 + 35	2.06	2.06	2.88	3.2	7.0	7.8	660	1690	3000	8.0	7.7	7.3
		25 + 25 + 50	1.80	1.80	3.60	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1
		25 + 25 + 60	1.64	1.64	3.93	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1
		25 + 35 + 35	1.87	2.62	2.62	3.2	7.1	7.8	660	1740	3000	8.2	7.9	7.6
		25 + 35 + 50	1.64	2.29	3.27	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1
		35 + 35 + 35	2.40	2.40	2.40	3.2	7.2	7.8	660	1860	3000	8.8	8.4	8.1

	Los	door unit			Cooling ca	pacity (kW)		Power	consumpt	ion (W)	Standard current (A)		
		mbination	Room Co	oling capa	city (kW)	Tot	al capacity	(kW)	DAI:	Ctandand	Marc	2201/	230V	2401/
	CO	mbination	A room	B room	C room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	2.0	_	_	1.8	2.0	2.8	500	540	950	2.5	2.4	2.3
	1	25	2.5		_	1.8	2.5	3.4	500	720	1080	3.3	3.2	3.0
	room	35	3.5	_	_	1.8	3.5	3.9	500	1090	1240	5.0	4.8	4.6
	100111	50	5.0	_	_	1.8	5.0	5.8	500	1780	2100	8.2	7.8	7.5
		60	6.0	_	_	1.8	6.0	6.3	500	2260	2370	10.4	9.9	9.5
		20 + 20	2.00	2.00	_	3.0	4.0	5.7	570	750	1750	3.4	3.3	3.2
		20 + 25	2.00	2.50	_	3.0	4.5	5.9	570	990	1910	4.5	4.3	4.2
		20 + 35	1.93	3.37	_	3.0	5.3	6.2	570	1550	2110	7.1	6.8	6.5
		20 + 50	1.89	4.71	_	3.0	6.6	6.9	570	2280	2390	10.5	10.0	9.6
		20 + 60	1.68	5.03	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
		25 + 25	2.45	2.45	_	3.0	4.9	6.2	570	1270	2110	5.8	5.6	5.3
	2	25 + 35	2.42	3.38	_	3.0	5.8	6.5	570	1840	2270	8.4	8.1	7.7
	room	25 + 50	2.23	4.47	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
		25 + 60	1.97	4.73	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
		35 + 35	3.30	3.30	_	3.0	6.6	6.9	570	2280	2390	10.5	10.0	9.6
o		35 + 50	2.76	3.94	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
ati		35 + 60	2.47	4.23	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
Cooling operation		50 + 50	3.35	3.35	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
፸		50 + 60	3.05	3.65	_	3.0	6.7	6.9	570	2320	2390	10.7	10.2	9.8
i.		20 + 20 + 20	1.90	1.90	1.90	3.6	5.7	7.5	690	1390	2390	6.6	6.3	6.0
<u></u>		20 + 20 + 25	1.82	1.82	2.27	3.6	5.9	7.5	690	1410	2390	6.7	6.4	6.1
ၓ		20 + 20 + 35	1.60	1.60	2.80	3.6	6.0	7.5	690	1430	2390	6.8	6.5	6.2
		20 + 20 + 50	1.40	1.40	3.50	3.6	6.3	7.5	690	1480	2390	7.0	6.7	6.4
		20 + 20 + 60	1.28	1.28	3.84	3.6	6.4	7.5	690	1500	2390	7.1	6.8	6.5
		20 + 25 + 25	1.69	2.11	2.11	3.6	5.9	7.5	690	1410	2390	6.7	6.4	6.1
		20 + 25 + 35	1.53	1.91	2.67	3.6	6.1	7.5	690	1460	2390	6.9	6.6	6.3
		20 + 25 + 50	1.35	1.68	3.37	3.6	6.4	7.5	690	1500	2390	7.1	6.8	6.5
	3	20 + 25 + 60	1.26	1.57	3.77	3.6	6.6	7.5	690	1520	2390	7.2	6.9	6.6
	room	20 + 35 + 35	1.40	2.45	2.45	3.6	6.3	7.5	690	1480	2390	7.0	6.7	6.4
		20 + 35 + 50	1.26	2.20	3.14	3.6	6.6	7.5	690	1520	2390	7.2	6.9	6.6
		25 + 25 + 25	2.00	2.00	2.00	3.6	6.0	7.5	690	1430	2390	6.8	6.5	6.2
		25 + 25 + 35	1.79	1.79	2.51	3.6	6.1	7.5	690	1460	2390	6.9	6.6	6.3
		25 + 25 + 50	1.60	1.60	3.20	3.6	6.4	7.5	690	1500	2390	7.1	6.8	6.5
		25 + 25 + 60	1.52	1.52	3.65	3.6	6.7	7.5	690	1540	2390	7.3	7.0	6.7
		25 + 35 + 35	1.68	2.36	2.36	3.6	6.4	7.5	690	1500	2390	7.1	6.8	6.5
		25 + 35 + 50	1.52	2.13	3.05	3.6	6.7	7.5	690	1540	2390	7.3	7.0	6.7
		35 + 35 + 35	2.20	2.20	2.20	3.6	6.6	7.5	690	1520	2390	7.2	6.9	6.6

SCM60ZM-S Table of Indoor unit combination with other indoor unit

	l.a	door unit			Heating cap	pacity (kW)		Power	consumpt	tion (W)	Stand	ard curre	nt (A)
		mbination	Room he	ating capa	city (kW)	Tot	al capacity	(kW)	DAI:	Standard	May	220V	230V	240V
	CO	IIIDIIIation	A room	B room	C room	Min.	Standard	Max.	Min.		Max.			240 V
		20	3.0	_	_	1.5	3.0	3.5	600	970	1330	4.5	4.3	4.1
	1	25	3.4	_	_	1.5	3.4	4.0	600	1140	1510	5.2	5.0	4.8
	room	35	4.5	_	_	1.5	4.5	4.8	600	1480	1790	6.8	6.5	6.2
	100111	50	5.8	_	_	1.5	5.8	6.1	600	1960	2310	9.0	8.6	8.2
		60	6.8	_	_	1.5	6.8	7.0	600	2250	2660	10.3	9.9	9.5
		20 + 20	3.00	3.00	_	2.1	6.0	7.0	630	1520	2100	7.0	6.7	6.4
		20 + 25	2.71	3.39	_	2.1	6.1	7.2	630	1600	2550	7.3	7.0	6.7
		20 + 35	2.36	4.14	_	2.1	6.5	7.3	630	1710	3000	7.9	7.5	7.2
		20 + 50	2.00	5.00	_	2.1	7.0	7.3	630	1940	3000	8.9	8.5	8.2
		20 + 60	1.78	5.33	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
		25 + 25	3.15	3.15	_	2.1	6.3	7.3	630	1660	3000	7.6	7.3	7.0
	2	25 + 35	2.79	3.91	_	2.1	6.7	7.3	630	1790	3000	8.2	7.9	7.5
	room	25 + 50	2.37	4.73	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
		25 + 60	2.09	5.01	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
		35 + 35	3.50	3.50	_	2.1	7.0	7.3	630	1940	3000	8.9	8.5	8.2
- u		35 + 50	2.92	4.18	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
ä;		35 + 60	2.62	4.48	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
operation		50 + 50	3.55	3.55	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
		50 + 60	3.23	3.87	_	2.1	7.1	7.3	630	1980	3000	9.1	8.7	8.3
Heating		20 + 20 + 20	2.20	2.20	2.20	3.2	6.6	7.6	660	1380	3000	6.5	6.3	6.0
ä		20 + 20 + 25	2.06	2.06	2.58	3.2	6.7	7.6	660	1420	3000	6.7	6.4	6.2
운		20 + 20 + 35	1.81	1.81	3.17	3.2	6.8	7.6	660	1540	3000	7.3	7.0	6.7
		20 + 20 + 50	1.56	1.56	3.89	3.2	7.0	7.6	660	1730	3000	8.2	7.8	7.5
		20 + 20 + 60	1.44	1.44	4.32	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2
		20 + 25 + 25	1.94	2.43	2.43	3.2	6.8	7.6	660	1540	3000	7.3	7.0	6.7
		20 + 25 + 35	1.73	2.16	3.02	3.2	6.9	7.6	660	1590	3000	7.5	7.2	6.9
		20 + 25 + 50	1.49	1.87	3.74	3.2	7.1	7.6	660	1780	3000	8.4	8.1	7.7
	3	20 + 25 + 60	1.37	1.71	4.11	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2
	room	20 + 35 + 35	1.56	2.72	2.72	3.2	7.0	7.6	660	1730	3000	8.2	7.8	7.5
		20 + 35 + 50	1.37	2.40	3.43	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2
		25 + 25 + 25	2.27	2.27	2.27	3.2	6.8	7.6	660	1540	3000	7.3	7.0	6.7
		25 + 25 + 35	2.06	2.06	2.88	3.2	7.0	7.6	660	1730	3000	8.2	7.8	7.5
		25 + 25 + 50	1.80	1.80	3.60	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2
		25 + 25 + 60	1.64	1.64	3.93	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2
		25 + 35 + 35	1.87	2.62	2.62	3.2	7.1	7.6	660	1780	3000	8.4	8.1	7.7
		25 + 35 + 50	1.64	2.29	3.27	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2
		35 + 35 + 35	2.40	2.40	2.40	3.2	7.2	7.6	660	1900	3000	9.0	8.6	8.2

					Cooling cap	pacity (kW)		Power	consumpt	tion (W)	Stand	lard curre	nt (A)
		door unit	Room Co	oling capa	city (kW)	Tot	al capacity	(kW)		i				
	со	mbination	A room	B room	C room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	2.0	_	_	1.8	2.0	2.7	500	570	950	2.6	2.5	2.4
	1	25	2.5	_	_	1.8	2.5	3.2	500	760	1080	3.5	3.3	3.2
	•	35	3.5	_	_	1.8	3.5	3.7	500	1150	1240	5.3	5.1	4.8
	room	50	5.0	_	_	1.8	5.0	5.6	500	1860	2100	8.5	8.2	7.8
		60	6.0	_	_	1.8	6.0	6.1	500	2350	2370	10.8	10.3	9.9
		20 + 20	2.00	2.00	_	3.0	4.0	5.6	570	800	1750	3.7	3.5	3.4
		20 + 25	2.00	2.50	_	3.0	4.5	5.8	570	1050	1910	4.8	4.6	4.4
		20 + 35	1.93	3.37	_	3.0	5.3	6.1	570	1620	2110	7.4	7.1	6.8
		20 + 50	1.89	4.71	_	3.0	6.6	6.8	570	2330	2390	10.7	10.2	9.8
		20 + 60	1.68	5.03	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
		25 + 25	2.45	2.45	_	3.0	4.9	6.1	570	1340	2110	6.2	5.9	5.6
	2	25 + 35	2.42	3.38	_	3.0	5.8	6.4	570	1920	2270	8.8	8.4	8.1
	room	25 + 50	2.23	4.47	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
		25 + 60	1.97	4.73	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
		35 + 35	3.30	3.30	_	3.0	6.6	6.8	570	2330	2390	10.7	10.2	9.8
e .		35 + 50	2.76	3.94	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
operation		35 + 60	2.47	4.23	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
ě		50 + 50	3.35	3.35	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
9		50 + 60	3.05	3.65	_	3.0	6.7	6.8	570	2370	2390	10.9	10.4	10.0
Cooling		20 + 20 + 20	1.90	1.90	1.90	3.6	5.7	7.3	690	1430	2390	6.8	6.5	6.2
등		20 + 20 + 25	1.82	1.82	2.27	3.6	5.9	7.3	690	1450	2390	6.9	6.6	6.3
ပိ		20 + 20 + 35	1.60	1.60	2.80	3.6	6.0	7.3	690	1470	2390	7.0	6.7	6.4
		20 + 20 + 50	1.40	1.40	3.50	3.6	6.3	7.3	690	1520	2390	7.2	6.9	6.6
		20 + 20 + 60	1.28	1.28	3.84	3.6	6.4	7.3	690	1540	2390	7.3	7.0	6.7
		20 + 25 + 25	1.69	2.11	2.11	3.6	5.9	7.3	690	1450	2390	6.9	6.6	6.3
		20 + 25 + 35	1.53	1.91	2.67	3.6	6.1	7.3	690	1500	2390	7.1	6.8	6.5
		20 + 25 + 50	1.35	1.68	3.37	3.6	6.4	7.3	690	1540	2390	7.3	7.0	6.7
	3	20 + 25 + 60	1.26	1.57	3.77	3.6	6.6	7.3	690	1560	2390	7.4	7.1	6.8
	room	20 + 35 + 35	1.40	2.45	2.45	3.6	6.3	7.3	690	1520	2390	7.2	6.9	6.6
		20 + 35 + 50	1.26	2.20	3.14	3.6	6.6	7.3	690	1560	2390	7.4	7.1	6.8
		25 + 25 + 25	2.00	2.00	2.00	3.6	6.0	7.3	690	1470	2390	7.0	6.7	6.4
		25 + 25 + 35	1.79	1.79	2.51	3.6	6.1	7.3	690	1500	2390	7.1	6.8	6.5
		25 + 25 + 50	1.60	1.60	3.20	3.6	6.4	7.3	690	1540	2390	7.3	7.0	6.7
		25 + 25 + 60	1.52	1.52	3.65	3.6	6.7	7.3	690	1580	2390	7.5	7.2	6.9
		25 + 35 + 35	1.68	2.36	2.36	3.6	6.4	7.3	690	1540	2390	7.3	7.0	6.7
		25 + 35 + 50	1.52	2.13	3.05	3.6	6.7	7.3	690	1580	2390	7.5	7.2	6.9
		35 + 35 + 35	2.20	2.20	2.20	3.6	6.6	7.3	690	1560	2390	7.4	7.1	6.8

SCM71ZM-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

				Heatin	g capacit	v (kW)			Power	consumpt	ion (W)	Stanc	lard curre	nt (A)
	Indoor unit	Roon	n heating	capacity			al capacity	(kW)						
	combination		B room		D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
	20	3.0	_	_	_	1.5	3.0	3.7	600	840	1330	3.9	3.7	3.5
	25	3.4	_	_	_	1.5	3.4	4.2	600	1000	1510	4.6	4.4	4.2
1	35	4.5	_	_	_	1.5	4.5	5.0	600	1330	1790	6.1	5.8	5.6
roon	50	5.8	_	_	_	1.5	5.8	6.5	600	1780	2310	8.2	7.8	7.5
	60	6.8	_	_	_	1.5	6.8	7.5	600	2100	2660	9.6	9.2	8.8
	20 + 20	2.70	2.70	_	_	2.1	5.4	7.4	630	1340	1870	6.2	5.9	5.6
	20 + 25	2.62	3.28	_	_	2.1	5.9	7.7	630	1530	2130	7.0	6.7	6.4
	20 + 35	2.51	4.39	_		2.1	6.9	8.3	630	1910	2650	8.8	8.4	8.0
	20 + 50	2.34	5.86	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	20 + 60	2.05	6.15	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	25 + 25	3.20	3.20	_	_	2.1	6.4	8.1	630	1700	2480	7.8	7.5	7.2
2	25 + 35	3.08	4.32	_	_	2.1	7.4	8.6	630	2090	2910	9.6	9.2	8.8
roon	25 + 50	2.73	5.47	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
1.00	25 + 60	2.41	5.79	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	35 + 35	4.10	4.10	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	35 + 50	3.38	4.82	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	35 + 60	3.02	5.18	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	50 + 50	4.10	4.10	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	50 + 60	3.73	4.47			2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	60 + 60	4.10	4.10	_	_	2.1	8.2	8.7	630	2430	3350	11.2	10.7	10.2
	20 + 20 + 20	2.57	2.57	2.57		3.2	7.7	9.1	660	1830	3350	8.4	8.0	7.7
	20 + 20 + 25	2.46	2.46	3.08	_	3.2	8.0	9.1	660	1930	3350	8.9	8.5	8.1
	20 + 20 + 35	2.24	2.24	3.92		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	20 + 20 + 50	1.87	1.87	4.67	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	20 + 20 + 60	1.68	1.68	5.04		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7 8.4
	20 + 25 + 25	2.34	2.93	2.93	_	3.2	8.2	9.1	660	1990	3350	9.1	8.7	-
	20 + 25 + 35	2.10 1.77	2.63 2.21	3.68 4.42	_	3.2	8.4 8.4	9.1	660	2060	3350	9.5 9.5	9.0	8.7 8.7
ے	20 + 25 + 50			4.42	_	3.2		9.1	660	2060 2060	3350 3350	9.5	9.0	8.7
흕	20 + 25 + 60	1.60	2.00 3.27	3.27	_		8.4 8.4	9.1	660 660	2060	3350	9.5	9.0	8.7
ā	20 + 35 + 35 20 + 35 + 50	1.87 1.60	2.80	4.00	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
Heating operation	00 - 05 - 00	1.46	2.56	4.00	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
roon	20 + 50 + 50	1.40	3.50	3.50		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
Ê	25 + 25 + 25	2.80	2.80	2.80		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
<u>ea</u>	25 + 25 + 35	2.47	2.47	3.46		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
Ξ	25 + 25 + 50	2.10	2.10	4.20		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	25 + 25 + 60	1.91	1.91	4.58		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	25 + 35 + 35	2.21	3.09	3.09	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	25 + 35 + 50	1.91	2.67	3.82	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	25 + 35 + 60	1.75	2.45	4.20		3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	25 + 50 + 50	1.68	3.36	3.36	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	35 + 35 + 35	2.80	2.80	2.80	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	35 + 35 + 50	2.45	2.45	3.50	_	3.2	8.4	9.1	660	2060	3350	9.5	9.0	8.7
	20 + 20 + 20 + 20	2.10	2.10	2.10	2.10	3.6	8.4	9.4	800	1960	3350	9.0	8.6	8.2
	20 + 20 + 20 + 25	1.98	1.98	1.98	2.47	3.6	8.4	9.4	800	1960	3350	9.0	8.6	8.2
	20 + 20 + 20 + 35	1.79	1.79	1.79	3.13	3.6	8.5	9.4	800	1980	3350	9.1	8.7	8.3
	20 + 20 + 20 + 50	1.56	1.56	1.56	3.91	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 20 + 20 + 60	1.43	1.43	1.43	4.30	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 20 + 25 + 25	1.89	1.89	2.36	2.36	3.6	8.5	9.4	800	1980	3350	9.1	8.7	8.3
	20 + 20 + 25 + 35	1.70	1.70	2.13	2.98	3.6	8.5	9.4	800	1980	3350	9.1	8.7	8.3
	20 + 20 + 25 + 50	1.50	1.50	1.87	3.74	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 20 + 25 + 60	1.38	1.38	1.72	4.13	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
4	20 + 20 + 35 + 35	1.56	1.56	2.74	2.74	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
roon		1.38	1.38	2.41	3.44	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 25 + 25 + 25	1.79	2.24	2.24	2.24	3.6	8.5	9.4	800	1980	3350	9.1	8.7	8.3
	20 + 25 + 25 + 35	1.64	2.05	2.05	2.87	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 25 + 25 + 50	1.43	1.79	1.79	3.58	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 25 + 35 + 35	1.50	1.87	2.62	2.62	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	20 + 35 + 35 + 35	1.38	2.41	2.41	2.41	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	25 + 25 + 25 + 25	2.13	2.13	2.13	2.13	3.6	8.5	9.4	800	1980	3350	9.1	8.7	8.3
	25 + 25 + 25 + 35	1.95	1.95	1.95	2.74	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	25 + 25 + 25 + 50	1.72	1.72	1.72	3.44	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4
	25 + 25 + 35 + 35	1.79	1.79	2.51	2.51	3.6	8.6	9.4	800	2000	3350	9.2	8.8	8.4

	Lo				Coolin	g capacit	y (kW)			Power	consumpt	ion (W)	Stand	lard curre	nt (A)
		ndoor unit ombination	Roon	n cooling	capacity	(kW)	Tot	al capacity	(kW)	B.41	01		0001/	0001/	0401/
	CO	mpination	A room	B room	C room	D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	2.0	_	_	_	1.8	2.0	2.8	480	500	950	2.3	2.2	2.1
		25	2.5	_	_	_	1.8	2.5	3.4	480	680	1080	3.1	3.0	2.9
	I	35	3.5	_	_	_	1.8	3.5	3.9	480	1010	1240	4.6	4.4	4.3
	room	50	5.0	_	_	_	1.8	5.0	6.1	480	1530	2100	7.0	6.7	6.4
		60	6.0	_	_	_	1.8	6.0	7.0	480	1880	2700	8.6	8.3	7.9
		20 + 20	2.00	2.00	_	_	3.0	4.0	6.1	550	850	1910	3.9	3.7	3.6
_		20 + 25	2.00	2.50	_	_	3.0	4.5	6.4	550	1070	2060	4.9	4.7	4.5
operation		20 + 35	2.00	3.51	_	_	3.0	5.5	6.9	550	1470	2320	6.7	6.5	6.2
ī.		20 + 50	1.94	4.86	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
ğ		20 + 60	1.70	5.10	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
		25 + 25	2.50	2.50	_	_	3.0	5.0	6.8	550	1250	2270	5.7	5.5	5.3
Cooling	2	25 + 35	2.46	3.44	_	_	3.0	5.9	7.2	550	1660	2470	7.6	7.3	7.0
8	_	25 + 50	2.27	4.53	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
S	room	25 + 60	2.00	4.80	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
		35 + 35	3.40	3.40	_		3.0	6.8	7.6	550	2030	2680	9.3	8.9	8.5
		35 + 50	2.80	4.00	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
		35 + 60	2.51	4.29	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
		50 + 50	3.40	3.40	_	_	3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
		50 + 60	3.09	3.71	_		3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5
		60 + 60	3.40	3.40	_		3.0	6.8	7.7	550	2030	2750	9.3	8.9	8.5

	Indoor unit				ng capacit				Power	consumpt	tion (W)	Stand	lard curre	nt (A)
		Roon	n cooling	capacity	(kW)	Tota	al capacity	(kW)		a	••	0001/	2001/	0.4014
С	ombination	A room	B room	C room	D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
	20 + 20 + 20	2.00	2.00	2.00		3.7	6.0	8.2	670	1380	2750	6.3	6.1	5.8
	20 + 20 + 25	2.00	2.00	2.50	_	3.7	6.5	8.2	670	1560	2750	7.2	6.9	6.6
	20 + 20 + 35	1.84	1.84	3.22	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 20 + 50	1.53	1.53	3.83	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 20 + 60	1.38	1.38	4.14	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 25 + 25	1.94	2.43	2.43	_	3.7	6.8	8.2	670	1740	2750	8.0	7.6	7.3
	20 + 25 + 35	1.73	2.16	3.02	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 25 + 50	1.45	1.82	3.63	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 25 + 60	1.31	1.64	3.94	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 35 + 35	1.53	2.68	2.68	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
3	20 + 35 + 50	1.31	2.30	3.29	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
room	20 + 35 + 60	1.20	2.10	3.60	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	20 + 50 + 50	1.15	2.88	2.88	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	25 + 25 + 25	2.30	2.30	2.30	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	25 + 25 + 35	2.03	2.03	2.84	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	25 + 25 + 50	1.73	1.73	3.45	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	25 + 25 + 60	1.57	1.57	3.76	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	25 + 35 + 35	1.82	2.54	2.54	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
	25 + 35 + 50	1.57	2.20	3.14	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
rati	25 + 35 + 60	1.44	2.01	3.45	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
<u>B</u>	25 + 50 + 50	1.38	2.76	2.76		3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
2	35 + 35 + 35	2.30	2.30	2.30	_	3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
, <u>i</u>	35 + 35 + 50	2.01	2.01	2.88		3.7	6.9	8.2	670	1830	2750	8.4	8.0	7.7
Cooling operation	20 + 20 + 20 + 20	1.73	1.73	1.73	1.73	4.4	6.9	8.8	890	1700	2750	7.8	7.5	7.2
ŏ	20 + 20 + 20 + 25	1.62	1.62	1.62	2.03	4.4	6.9	8.8	890	1700	2750	7.8	7.5	7.2
	20 + 20 + 20 + 35	1.49	1.49	1.49	2.62	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 20 + 20 + 50	1.29	1.29	1.29	3.23	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 20 + 20 + 60	1.18	1.18	1.18	3.55	4.4	7.1	8.8	890	1740 1700	2750 2750	8.0	7.6	7.3
	20 + 20 + 25 + 25	1.53	1.53	1.92	1.92	4.4	6.9	8.8	890	1700	2750	7.8	7.5	7.2
	20 + 20 + 25 + 35	1.42	1.42	1.78 1.54	2.49	4.4 4.4	7.1	8.8	890 890	1740	2750	8.0 8.0	7.6 7.6	7.3 7.3
	20 + 20 + 25 + 50	1.23	1.14	1.54	3.09 3.41	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
4	20 + 20 + 25 + 60	1.14	1.14	2.27	2.27	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 20 + 35 + 35	1.14	1.14	1.99	2.27	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
10011	20 + 20 + 35 + 50 20 + 25 + 25 + 25	1.14	1.14	1.87	1.87	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 25 + 25 + 25	1.49	1.69	1.69	2.37	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 25 + 25 + 50	1.18	1.48	1.48	2.96	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 25 + 25 + 35	1.10	1.54	2.16	2.96	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	20 + 25 + 35 + 35	1.14	1.99	1.99	1.99	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	25 + 25 + 25 + 25	1.78	1.78	1.78	1.78	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	25 + 25 + 25 + 25	1.61	1.61	1.61	2.27	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	25 + 25 + 25 + 35	1.42	1.42	1.42	2.27	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	25 + 25 + 25 + 35	1.48	1.48	2.07	2.07	4.4	7.1	8.8	890	1740	2750	8.0	7.6	7.3
	■ ∠5 + ∠5 + 35 + 35	1.48	1.40	2.07	2.07	4.4	[/.1	0.0	I 990	1740	2/50	J 8.0	7.0	1.3

SCM71ZM-S Table of Indoor unit combination with other indoor unit

	To a	al a a su consta			Heatin	g capacity	/ (kW)			Power	consumpt	tion (W)	Stanc	lard curre	nt (A)
		door unit mbination	Room	n heating	capacity	(kW)	Tot	al capacity	(kW)	B/II:m	Standard	Mare	220V	230V	240V
	COI	ilibiliation	A room	B room	C room	D room	Min.	Standard	Max.	Min.		Max.			
		20	3.0	_	_	_	1.5	3.0	3.5	600	1060	1330	4.9	4.7	4.5
	1	25	3.4		_	_	1.5	3.4	4.0	600	1220	1510	5.6	5.4	5.1
	room	35	4.5		_	_	1.5	4.5	4.8	600	1510	1790	6.9	6.6	6.4
	100111	50	5.8	_	_	_	1.5	5.8	6.2	600	1950	2310	9.0	8.6	8.2
		60	6.8				1.5	6.8	7.1	600	2240	2660	10.3	9.8	9.4
		20 + 20	2.70	2.70	_	_	2.1	5.4	7.0	630	1370	1870	6.3	6.0	5.8
		20 + 25	2.62	3.28	_		2.1	5.9	7.3	630	1560	2130	7.2	6.9	6.6
		20 + 35	2.51	4.39	_	_	2.1	6.9	7.9	630	1950	2650	9.0	8.6	8.2
		20 + 50	2.34	5.86	_	_	2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
	2	20 + 60	2.05	6.15	_	_	2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
	room	25 + 25	3.20	3.20	_	_	2.1	6.4	7.7	630	1740	2480 2910	8.0	7.6 9.4	7.3 9.0
	100111	25 + 35	3.08	4.32	_	_	2.1	7.4	8.2	630 630	2130 2490	3350	9.8 11.4	10.9	10.5
		25 + 50	2.73	5.47	_	_	2.1	8.2 8.2	8.3 8.3	630	2490	3350	11.4	10.9	10.5
		25 + 60 35 + 35	2.41 4.10	5.79 4.10	_		2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
	-	35 + 35 35 + 50	3.38	4.10	_	_	2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
	ŀ	35 + 60	3.02	5.18		_	2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
		50 + 50	4.10	4.10		_	2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
_	-	50 + 60	3.73	4.10		_	2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
읥	-	60 + 60	4.10	4.10			2.1	8.2	8.3	630	2490	3350	11.4	10.9	10.5
a.		20 + 20 + 20	2.57	2.57	2.57		3.2	7.7	8.9	660	1870	3350	8.6	8.2	7.9
Heating operation		20 + 20 + 25	2.46	2.46	3.08	_	3.2	8.0	8.9	660	1970	3350	9.0	8.7	8.3
ğ	ŀ	20 + 20 + 35	2.24	2.24	3.92		3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
ᇶᅵ		20 + 20 + 50	1.87	1.87	4.67	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
ا <u>څ</u>	-	20 + 20 + 60	1.68	1.68	5.04		3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
-1		20 + 25 + 25	2.34	2.93	2.93	_	3.2	8.2	8.9	660	2030	3350	9.3	8.9	8.5
		20 + 25 + 35	2.10	2.63	3.68		3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		20 + 25 + 50	1.77	2.21	4.42	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
	ľ	20 + 25 + 60	1.60	2.00	4.80	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		20 + 35 + 35	1.87	3.27	3.27	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
	3	20 + 35 + 50	1.60	2.80	4.00	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
	room	20 + 35 + 60	1.46	2.56	4.38	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		20 + 50 + 50	1.40	3.50	3.50	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 25 + 25	2.80	2.80	2.80	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 25 + 35	2.47	2.47	3.46	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 25 + 50	2.10	2.10	4.20	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 25 + 60	1.91	1.91	4.58	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 35 + 35	2.21	3.09	3.09	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 35 + 50	1.91	2.67	3.82	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 35 + 60	1.75	2.45	4.20	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		25 + 50 + 50	1.68	3.36	3.36	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		35 + 35 + 35	2.80	2.80	2.80	_	3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8
		35 + 35 + 50	2.45	2.45	3.50		3.2	8.4	8.9	660	2100	3350	9.6	9.2	8.8

	1	ada a manada			Heatin	g capacity	y (kW)			Power	consumpt	ion (W)	Stand	lard curre	nt (A)
		ndoor unit embination	Roon	n heating	capacity	(kW)	Tota	al capacity	(kW)	D.A.L.	04		0001/	0001/	0.401/
	CO	mbination	A room	B room	C room	D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20 + 20 + 20 + 20	2.10	2.10	2.10	2.10	3.6	8.4	9.1	800	2010	3350	9.2	8.8	8.5
		20 + 20 + 20 + 25	1.98	1.98	1.98	2.47	3.6	8.4	9.1	800	2010	3350	9.2	8.8	8.5
		20 + 20 + 20 + 35	1.79	1.79	1.79	3.13	3.6	8.5	9.1	800	2030	3350	9.3	8.9	8.5
		20 + 20 + 20 + 50	1.56	1.56	1.56	3.91	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		20 + 20 + 20 + 60	1.43	1.43	1.43	4.30	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		20 + 20 + 25 + 25	1.89	1.89	2.36	2.36	3.6	8.5	9.1	800	2030	3350	9.3	8.9	8.5
_		20 + 20 + 25 + 35	1.70	1.70	2.13	2.98	3.6	8.5	9.1	800	2030	3350	9.3	8.9	8.5
operation		20 + 20 + 25 + 50	1.50	1.50	1.87	3.74	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
ā		20 + 20 + 25 + 60	1.38	1.38	1.72	4.13	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
8	4	20 + 20 + 35 + 35	1.56	1.56	2.74	2.74	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
	room	20 + 20 + 35 + 50	1.38	1.38	2.41	3.44	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
Heating		20 + 25 + 25 + 25	1.79	2.24	2.24	2.24	3.6	8.5	9.1	800	2030	3350	9.3	8.9	8.5
ea		20 + 25 + 25 + 35	1.64	2.05	2.05	2.87	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
I		20 + 25 + 25 + 50	1.43	1.79	1.79	3.58	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		20 + 25 + 35 + 35	1.50	1.87	2.62	2.62	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		20 + 35 + 35 + 35	1.38	2.41	2.41	2.41	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		25 + 25 + 25 + 25	2.13	2.13	2.13	2.13	3.6	8.5	9.1	800	2030	3350	9.3	8.9	8.5
		25 + 25 + 25 + 35	1.95	1.95	1.95	2.74	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		25 + 25 + 25 + 50	1.72	1.72	1.72	3.44	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6
		25 + 25 + 35 + 35	1.79	1.79	2.51	2.51	3.6	8.6	9.1	800	2050	3350	9.4	9.0	8.6

	ndoor unit				g capacit		-1 T	(1-382)	Power	consumpt	ion (W)	Stand	lard curre	nt (A)
	ombination			capacity	<u> </u>		al capacity		Min.	Standard	Max.	220V	230V	240V
			B room	C room	D room	Min.	Standard	Max.						
	20	2.0		_	_	1.8	2.0	2.7	480	530	950	2.4	2.3	2.2
1	25	2.5		_	_	1.8	2.5	3.2	480	730	1080	3.4	3.2	3.1
room	35	3.5				1.8	3.5	3.7	480	1120	1240	5.1	4.9	4.7
	50	5.0	_	_	_	1.8	5.0	5.8	480	1710	2100	7.9	7.5	7.2
	60	6.0	_	_	_	1.8	6.0	6.7	480	2140	2700	9.8	9.4	9.0
	20 + 20	2.00	2.00	_	_	3.0	4.0	5.8	550	930	1910	4.3	4.1	3.9
	20 + 25	2.00	2.50			3.0	4.5	6.1	550	1170	2060	5.4	5.1	4.9
	20 + 35	2.00	3.51	_	_	3.0	5.5	6.6	550	1590	2320	7.3	7.0	6.7
	20 + 50	1.94	4.86	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	20 + 60	1.70	5.10	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	25 + 25	2.50	2.50			3.0	5.0	6.5	550	1360	2270	6.2	6.0	5.7
2	25 + 35	2.46	3.44	_	_	3.0	5.9	6.8	550	1780	2470	8.2	7.8	7.5
room	25 + 50	2.27	4.53	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	25 + 60	2.00	4.80	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	35 + 35	3.40	3.40		_	3.0	6.8	7.2	550	2150	2680	9.9	9.4	9.0
	35 + 50	2.80	4.00	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	35 + 60	2.51	4.29	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	50 + 50	3.40	3.40	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	50 + 60	3.09	3.71			3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	60 + 60	3.40	3.40	_	_	3.0	6.8	7.3	550	2150	2750	9.9	9.4	9.0
	20 + 20 + 20	2.00	2.00	2.00	_	3.7	6.0	7.8	670	1450	2750	6.7	6.4	6.1
	20 + 20 + 25	2.00	2.00	2.50		3.7	6.5	7.8	670	1630	2750	7.5	7.2	6.9
	20 + 20 + 35	1.84	1.84	3.22		3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 20 + 50	1.53	1.53	3.83	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 20 + 60	1.38	1.38	4.14	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 25 + 25	1.94	2.43	2.43	_	3.7	6.8	7.8	670	1820	2750	8.4	8.0	7.7
	20 + 25 + 35	1.73	2.16	3.02		3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 25 + 50	1.45	1.82	3.63	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 25 + 60	1.31	1.64	3.94	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 35 + 35	1.53	2.68	2.68	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
3	20 + 35 + 50	1.31	2.30	3.29		3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
room		1.20	2.10	3.60	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	20 + 50 + 50	1.15	2.88	2.88	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	25 + 25 + 25	2.30	2.30	2.30	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	25 + 25 + 35	2.03	2.03	2.84		3.7	6.9	7.8	670	1910	2750	8.8		8.0
	25 + 25 + 50	1.73	1.73	3.45	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	
	25 + 25 + 60	1.57	1.57	3.76	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	25 + 35 + 35	1.82	2.54	2.54	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	25 + 35 + 50	1.57	2.20	3.14		3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	25 + 35 + 60	1.44	2.01	3.45	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	25 + 50 + 50	1.38	2.76	2.76	_	3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	35 + 35 + 35	2.30	2.30	2.30		3.7	6.9	7.8	670	1910	2750	8.8	8.4	8.0
	35 + 35 + 50	2.01	2.01	2.88	4.70	3.7	6.9	7.8	670 890	1910	2750	8.8	8.4 7.7	8.0 7.4
	20 + 20 + 20 + 20	1.73	1.73	1.73	1.73	4.4	6.9	8.3		1750	2750	8.0	7.7	7.4
	20 + 20 + 20 + 25	1.62	1.62	1.62	2.03	4.4	6.9	8.3	890	1750	2750	8.0		
	20 + 20 + 20 + 35	1.49	1.49	1.49	2.62	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 20 + 20 + 50	1.29	1.29	1.29	3.23	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 20 + 20 + 60	1.18	1.18	1.18	3.55	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 20 + 25 + 25	1.53	1.53	1.92	1.92	4.4	6.9	8.3	890	1750	2750	8.0	7.7	7.4
	20 + 20 + 25 + 35	1.42	1.42	1.78	2.49	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 20 + 25 + 50	1.23	1.23	1.54	3.09	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
4	20 + 20 + 25 + 60	1.14	1.14	1.42	3.41	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 20 + 35 + 35	1.29	1.29	2.27	2.27	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
room		1.14	1.14	1.99	2.84	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 25 + 25 + 25	1.49	1.87	1.87	1.87	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 25 + 25 + 35	1.35	1.69	1.69	2.37	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 25 + 25 + 50	1.18	1.48	1.48	2.96	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 25 + 35 + 35	1.23	1.54	2.16	2.16	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	20 + 35 + 35 + 35	1.14	1.99	1.99	1.99	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	25 + 25 + 25 + 25	1.78	1.78	1.78	1.78	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	25 + 25 + 25 + 35	1.61	1.61	1.61	2.27	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	25 + 25 + 25 + 50	1.42	1.42	1.42	2.84	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5
	25 + 25 + 35 + 35	1.48	1.48	2.07	2.07	4.4	7.1	8.3	890	1790	2750	8.2	7.9	7.5

SCM80ZM-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

	Indoor unit				ıg capacit				Power	consump	tion (W)	Stanc	lard curre	nt (A)
	combination		n heating		` '		al capacity		Min.	Standard	Max.	220V	230V	240V
		A room			D room	Min.	Standard	Max.						
	20	3.0				1.5 1.5	3.0	3.7 4.2	600	840 1000	1330 1510	3.9 4.6	3.7 4.4	3.5 4.2
1	25 35	4.5				1.5	4.5	5.0	600	1330	1790	6.1	5.8	5.6
rooi	m 50	5.8		_	_	1.5	5.8	6.5	600	1780	2310	8.2	7.8	7.5
	60	6.8	_	_	_	1.5	6.8	7.5	600	2100	2660	9.6	9.2	8.8
	20 + 20	2.70	2.70	_	_	2.1	5.4	7.4	630	1340	1870	6.2	5.9	5.6
	20 + 25	2.62	3.28	_	_	2.1	5.9	7.7	630	1530	2130	7.0	6.7	6.4
	20 + 35	2.51	4.39	_	_	2.1	6.9	8.3	630	1910	2650	8.8	8.4	8.0
	20 + 50	2.37	5.93	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	20 + 60 25 + 25	2.08	6.23	_	_	2.1	8.3 6.4	8.8	630 630	2460 1700	3430 2480	7.8	10.8 7.5	10.4
	25 + 25	3.20 3.08	3.20 4.32	_	_	2.1	7.4	8.1	630	2090	2910	9.6	9.2	7.2 8.8
2	25 + 50	2.77	5.53			2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
rooi	25 + 60	2.44	5.86	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	35 + 35	4.15	4.15	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	35 + 50	3.42	4.88	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	35 + 60	3.06	5.24	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	50 + 50	4.15	4.15	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	50 + 60	3.77	4.53	_	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	60 + 60	4.15	4.15	2.57	_	2.1	8.3	8.8	630	2460	3430	11.3	10.8	10.4
	20 + 20 + 20	2.57	2.57	2.57		3.2	7.7 8.0	9.3	660 660	1830 1930	3430 3430	8.4 8.9	8.0 8.5	7.7 8.1
	20 + 20 + 25 20 + 20 + 35	2.46 2.27	2.46 2.27	3.08	_	3.2	8.5	9.3	660	2090	3430	9.6	9.2	8.1
	20 + 20 + 35	2.00	2.00	5.00		3.2	9.0	9.3	660	2250	3430	10.3	9.2	9.5
	20 + 20 + 60	1.80	1.80	5.40		3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	20 + 25 + 25	2.34	2.93	2.93	_	3.2	8.2	9.3	660	1990	3430	9.1	8.7	8.4
	20 + 25 + 35	2.20	2.75	3.85	_	3.2	8.8	9.3	660	2180	3430	10.0	9.6	9.2
	20 + 25 + 50	1.89	2.37	4.74	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	20 + 25 + 60	1.71	2.14	5.14	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	20 + 35 + 35	2.00	3.50	3.50	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	20 + 35 + 50	1.71	3.00	4.29	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	20 + 35 + 60	1.57	2.74	4.70	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
_ 3	20 + 50 + 50	1.50	3.75	3.75		3.2	9.0	9.3	660 660	2250 2250	3430 3430	10.3	9.9	9.5
rooi	m 20 + 50 + 60 25 + 25 + 25	1.38 2.83	3.46 2.83	4.15 2.83		3.2	9.0 8.5	9.3	660	2090	3430	9.6	9.9	9.5 8.8
ooi rooi	25 + 25 + 25	2.65	2.65	3.71		3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
<u>5</u>	25 + 25 + 50	2.25	2.25	4.50	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
20	25 + 25 + 60	2.05	2.05	4.91	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
<u> </u>	25 + 35 + 35	2.37	3.32	3.32	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
<u> </u>	25 + 35 + 50	2.05	2.86	4.09	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	25 + 35 + 60	1.88	2.63	4.50	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	25 + 50 + 50	1.80	3.60	3.60	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	25 + 50 + 60	1.67	3.33	4.00	_	3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	35 + 35 + 35	3.00	3.00	3.00	_	3.2	9.0	9.3	660 660	2250 2250	3430 3430	10.3	9.9	9.5 9.5
	35 + 35 + 50 35 + 35 + 60	2.63	2.63 2.42	3.75 4.15		3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	35 + 50 + 50	2.33	3.33	3.33		3.2	9.0	9.3	660	2250	3430	10.3	9.9	9.5
	20 + 20 + 20 + 20	2.28	2.28	2.28	2.28	3.6	9.1	9.8	800	2220	3430	10.2	9.7	9.3
	20 + 20 + 20 + 25	2.14	2.14	2.14	2.68	3.6	9.1	9.8	800	2220	3430	10.2	9.7	9.3
	20 + 20 + 20 + 35	1.94	1.94	1.94	3.39	3.6	9.2	9.8	800	2240	3430	10.3	9.8	9.4
	20 + 20 + 20 + 50	1.67	1.67	1.67	4.18	3.6	9.2	9.8	800	2240	3430	10.3	9.8	9.4
	20 + 20 + 20 + 60	1.55	1.55	1.55	4.65	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
	20 + 20 + 25 + 25	2.04	2.04	2.56	2.56	3.6	9.2	9.8	800	2240	3430	10.3	9.8	9.4
	20 + 20 + 25 + 35	1.84	1.84	2.30	3.22	3.6	9.2	9.8	800	2240	3430	10.3	9.8	9.4
	20 + 20 + 25 + 50	1.62	1.62	2.02	4.04	3.6	9.3	9.8	800 800	2260 2260	3430 3430	10.4 10.4	10.0	9.5 9.5
	20 + 20 + 25 + 60 20 + 20 + 35 + 35	1.49 1.67	1.49 1.67	1.86 2.93	4.46 2.93	3.6	9.3	9.8	800	2240	3430	10.4	9.8	9.5
	20 + 20 + 35 + 50	1.49	1.49	2.60	3.72	3.6	9.2	9.8	800	2260	3430	10.3	10.0	9.5
	20 + 20 + 35 + 60		1.38	2.41	4.13	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
4	20 + 25 + 25 + 25		2.42	2.42	2.42	3.6	9.2	9.8	800	2240	3430	10.3	9.8	9.4
rooi	m 20 + 25 + 25 + 35		2.19	2.19	3.07	3.6	9.2	9.8	800	2240	3430	10.3	9.8	9.4
	20 + 25 + 25 + 50		1.94	1.94	3.88	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
	20 + 25 + 25 + 60		1.79	1.79	4.29	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
	20 + 25 + 35 + 35		2.02	2.83	2.83	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
	20 + 25 + 35 + 50		1.79	2.50	3.58	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
	20 + 35 + 35 + 35		2.60	2.60	2.60	3.6	9.3	9.8	800	2260 2240	3430 3430	10.4	10.0	9.5
	25 + 25 + 25 + 25		2.30	2.30	2.30	3.6	9.2	9.8	800 800	2240	3430	10.3	9.8	9.4
	25 + 25 + 25 + 35 25 + 25 + 25 + 50		2.09 1.86	2.09 1.86	2.93 3.72	3.6	9.2	9.8	800	2260	3430	10.3	10.0	9.4
	25 + 25 + 25 + 60		1.72	1.72	4.13	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
	25 + 25 + 25 + 60		1.72	2.71	2.71	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5
						0.0	1 0.0	0.0				1 10.7		. 0.0
	25 + 25 + 35 + 50		1.72	2.41	3.44	3.6	9.3	9.8	800	2260	3430	10.4	10.0	9.5

- 1.	ndoor unit			Coolin	g capacit	y (kW)			Power	consumpt	tion (W)	Stand	lard curre	nt (A)
	ombination			capacity			al capacity		Min.	Standard	Max.	220V	230V	240V
				C room	D room	Min.	Standard	Max.			950			
	20 25	2.0	_		_	1.8 1.8	2.0	2.8 3.4	480 480	500 680	1080	2.3 3.1	3.0	2.1
1	35	3.5				1.8	3.5	3.9	480	1010	1240	4.6	4.4	4.3
room	50	5.0	_	_		1.8	5.0	6.1	480	1530	2100	7.0	6.7	6.4
	60	6.0	_	_	_	1.8	6.0	7.0	480	1880	2700	8.6	8.3	7.9
	20 + 20	2.00	2.00	_	_	3.0	4.0	6.1	550	850	1910	3.9	3.7	3.6
	20 + 25	2.00	2.50	_		3.0	4.5	6.4	550	1070	2060	4.9	4.7	4.5
	20 + 35	2.00	3.50	_		3.0	5.5	6.9	550	1470	2320	6.7	6.5	6.2
	20 + 50	1.97	4.93	_	_	3.0	6.9	7.9	550	2070	2830	9.5	9.1	8.7
	20 + 60	1.85	5.55	_	_	3.0	7.4	7.9	550	2290	2830	10.5	10.1	9.6
	25 + 25	2.50	2.50	_	_	3.0	5.0	6.8	550	1250	2270	5.7	5.5	5.3
2	25 + 35	2.46	3.44	_	_	3.0	5.9 7.4	7.2	550	1660 2290	2470	7.6	7.3 10.1	7.0 9.6
room	25 + 50 25 + 60	2.47	4.93 5.22		_	3.0	7.4	7.9 7.9	550 550	2290	2830 2830	10.5 10.5	10.1	9.6
	35 + 35	3.45	3.45	_	_	3.0	6.9	7.6	550	2070	2680	9.5	9.1	8.7
	35 + 50	3.05	4.35	_	_	3.0	7.4	7.9	550	2290	2830	10.5	10.1	9.6
	35 + 60	2.73	4.67	_	_	3.0	7.4	7.9	550	2290	2830	10.5	10.1	9.6
	50 + 50	3.70	3.70	_	_	3.0	7.4	7.9	550	2290	2830	10.5	10.1	9.6
	50 + 60	3.36	4.04	_	_	3.0	7.4	7.9	550	2290	2830	10.5	10.1	9.6
	60 + 60	3.70	3.70	_	_	3.0	7.4	7.9	550	2290	2830	10.5	10.1	9.6
	20 + 20 + 20	2.00	2.00	2.00		3.7	6.0	8.5	670	1380	2830	6.3	6.1	5.8
	20 + 20 + 25	2.00	2.00	2.50	_	3.7	6.5	8.5	670	1560	2830	7.2	6.9	6.6
	20 + 20 + 35	1.89	1.89	3.31	_	3.7	7.1	8.5	670	1880	2830	8.6	8.3	7.9
	20 + 20 + 50	1.73	1.73	4.33	_	3.7	7.8 7.8	8.5 8.5	670	2230	2830	10.2 10.2	9.8 9.8	9.4
	20 + 20 + 60 20 + 25 + 25	1.56 1.94	1.56 2.43	4.68 2.43	_	3.7 3.7	6.8	8.5	670 670	2230 1740	2830 2830	8.0	7.6	7.3
	20 + 25 + 35	1.88	2.43	3.28		3.7	7.5	8.5	670	2050	2830	9.4	9.0	8.6
	20 + 25 + 50	1.64	2.05	4.11		3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	20 + 25 + 60	1.49	1.86	4.46	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	20 + 35 + 35	1.73	3.03	3.03	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	20 + 35 + 50	1.49	2.60	3.71	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	20 + 35 + 60	1.36	2.37	4.07	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
3	20 + 50 + 50	1.30	3.25	3.25	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
room	20 + 50 + 60	1.20	3.00	3.60	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	25 + 25 + 25	2.37	2.37	2.37		3.7	7.1	8.5	670	1880	2830	8.6	8.3	7.9
	25 + 25 + 35	2.29	2.29	3.21	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	25 + 25 + 50	1.95	1.95	3.90	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	25 + 25 + 60	1.77 2.05	1.77 2.87	4.25 2.87		3.7	7.8 7.8	8.5 8.5	670 670	2230 2230	2830 2830	10.2 10.2	9.8 9.8	9.4
	25 + 35 + 35 25 + 35 + 50	1.77	2.48	3.55	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	25 + 35 + 60	1.63	2.28	3.90		3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	25 + 50 + 50	1.56	3.12	3.12		3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	25 + 50 + 60	1.44	2.89	3.47	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	35 + 35 + 35	2.60	2.60	2.60	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	35 + 35 + 50	2.28	2.28	3.25	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	35 + 35 + 60	2.10	2.10	3.60	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	35 + 50 + 50	2.02	2.89	2.89	_	3.7	7.8	8.5	670	2230	2830	10.2	9.8	9.4
	20 + 20 + 20 + 20	1.95	1.95	1.95	1.95	4.4	7.8	9.2	890	2120	2830	9.6	9.2	8.8
	20 + 20 + 20 + 25	1.84	1.84	1.84	2.29	4.4	7.8	9.2	890	2120	2830	9.6	9.2	8.8 8.9
	20 + 20 + 20 + 35 20 + 20 + 20 + 50	1.66 1.44	1.66 1.44	1.66 1.44	2.91 3.59	4.4 4.4	7.9 7.9	9.2	890 890	2140 2140	2830 2830	9.7 9.7	9.3	8.9
	20 + 20 + 20 + 60	1.33	1.33	1.33	4.00	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	20 + 20 + 25 + 25	1.76	1.76	2.19	2.19	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
	20 + 20 + 25 + 35	1.58	1.58	1.98	2.77	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
	20 + 20 + 25 + 50	1.37	1.37	1.72	3.43	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
	20 + 20 + 25 + 60	1.28	1.28	1.60	3.84	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	20 + 20 + 35 + 35	1.44	1.44	2.51	2.51	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
	20 + 20 + 35 + 50	1.28	1.28	2.24	3.20	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	20 + 20 + 35 + 60	1.19	1.19	2.07	3.56	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
4	20 + 25 + 25 + 25	1.66	2.08	2.08	2.08	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
room		1.50	1.88	1.88	2.63	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9 9.0
	20 + 25 + 25 + 50	1.33	1.67 1.54	1.67 1.54	3.33	4.4 4.4	8.0	9.2	890 890	2160 2160	2830 2830	9.9	9.4 9.4	9.0
	20 + 25 + 25 + 60 20 + 25 + 35 + 35		1.72	2.40	3.69 2.40	4.4	7.9	9.2	890	2140	2830	9.9	9.4	8.9
	20 + 25 + 35 + 50		1.72	2.40	3.08	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	20 + 35 + 35 + 35		2.24	2.13	2.24	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	25 + 25 + 25 + 25		1.98	1.98	1.98	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
	25 + 25 + 25 + 35		1.80	1.80	2.51	4.4	7.9	9.2	890	2140	2830	9.7	9.3	8.9
	25 + 25 + 25 + 50	1.60	1.60	1.60	3.20	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	25 + 25 + 25 + 60		1.48	1.48	3.56	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	25 + 25 + 35 + 35		1.67	2.33	2.33	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	25 + 25 + 35 + 50		1.48	2.07	2.96	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0
	25 + 35 + 35 + 35	1.54	2.15	2.15	2.15	4.4	8.0	9.2	890	2160	2830	9.9	9.4	9.0

SCM80ZM-S Table of Indoor unit combination with other indoor unit

	l.	ndoor unit			Heatin	g capacit	y (kW)			Power	consumpt	ion (W)	Stand	lard curre	nt (A)
		mbination	Roon	n heating	capacity	(kW)	Tot	al capacity	(kW)	Min.	Standard	Max.	220V	230V	240V
		ilibiliation	A room	B room	C room	D room	Min.	Standard	Max.	IVIIII.	Standard	wax.	220V	230V	240V
		20	3.0	_	_	_	1.5	3.0	3.5	600	1060	1330	4.9	4.7	4.5
	4	25	3.4	_	_	_	1.5	3.4	4.0	600	1220	1510	5.6	5.4	5.1
	room	35	4.5	_	_	_	1.5	4.5	4.8	600	1510	1790	6.9	6.6	6.4
	100111	50	5.8	_	_	_	1.5	5.8	6.2	600	1950	2310	9.0	8.6	8.2
Ξ		60	6.8	_	_	_	1.5	6.8	7.1	600	2240	2660	10.3	9.8	9.4
ration		20 + 20	2.70	2.70	_		2.1	5.4	7.0	630	1370	1870	6.3	6.0	5.8
pers		20 + 25	2.62	3.28	_	_	2.1	5.9	7.3	630	1560	2130	7.2	6.9	6.6
9		20 + 35	2.51	4.39	_	_	2.1	6.9	7.9	630	1950	2650	9.0	8.6	8.2
g		20 + 50	2.37	5.93	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
Heating	_	20 + 60	2.08	6.23	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
20	2	25 + 25	3.20	3.20	_	_	2.1	6.4	7.7	630	1740	2480	8.0	7.6	7.3
_	room	25 + 35	3.08	4.32	_	_	2.1	7.4	8.2	630	2130	2910	9.8	9.4	9.0
		25 + 50	2.77	5.53	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
		25 + 60	2.44	5.86	_		2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
		35 + 35	4.15	4.15	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
		35 + 50	3.42	4.88	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6

					Heatin	g capacit	y (kW)			Power	consumpt	tion (W)	Stand	lard curre	nt (A)
		ndoor unit	Roon	n heating				al capacity	/ (kW)	8.01					
	CC	mbination	A room		C room	D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		35 + 60	3.06	5.24		_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
	2	50 + 50	4.15	4.15	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
	room	50 + 60	3.77	4.53	_	_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
		60 + 60	4.15	4.15		_	2.1	8.3	8.4	630	2510	3430	11.5	11.0	10.6
		20 + 20 + 20	2.57	2.57	2.57		3.2	7.7	9.1	660	1870	3430	8.6	8.2	7.9
		20 + 20 + 25	2.46	2.46	3.08	_	3.2	8.0	9.1	660	1970	3430	9.0	8.7 9.4	8.3 9.0
		20 + 20 + 35	2.27	2.27	3.97	_	3.2	8.5	9.1	660 660	2130	3430	9.8 10.6	10.1	9.0
		20 + 20 + 50 20 + 20 + 60	2.00 1.80	2.00 1.80	5.00 5.40		3.2	9.0	9.1	660	2300	3430 3430	10.6	10.1	9.7
		20 + 25 + 25	2.34	2.93	2.93		3.2	8.2	9.1	660	2030	3430	9.3	8.9	8.5
		20 + 25 + 25	2.34	2.93	3.85		3.2	8.8	9.1	660	2220	3430	10.2	9.7	9.3
		20 + 25 + 50	1.89	2.73	4.74		3.2	9.0	9.1	660	2300	3430	10.2	10.1	9.7
		20 + 25 + 60	1.71	2.14	5.14		3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		20 + 35 + 35	2.00	3.50	3.50	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		20 + 35 + 50	1.71	3.00	4.29	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		20 + 35 + 60	1.57	2.74	4.70	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
	3	20 + 50 + 50	1.50	3.75	3.75	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
	room	20 + 50 + 60	1.38	3.46	4.15	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		25 + 25 + 25	2.83	2.83	2.83	_	3.2	8.5	9.1	660	2130	3430	9.8	9.4	9.0
		25 + 25 + 35	2.65	2.65	3.71	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		25 + 25 + 50	2.25	2.25	4.50	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		25 + 25 + 60	2.05	2.05	4.91	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		25 + 35 + 35	2.37	3.32	3.32	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
_		25 + 35 + 50	2.05	2.86	4.09	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
Ö		25 + 35 + 60	1.88	2.63	4.50	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
Heating operation		25 + 50 + 50	1.80	3.60	3.60	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
be		25 + 50 + 60	1.67	3.33	4.00	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
0		35 + 35 + 35	3.00	3.00	3.00	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
Ë		35 + 35 + 50	2.63	2.63	3.75	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
eat		35 + 35 + 60	2.42	2.42	4.15	_	3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
I		35 + 50 + 50	2.33	3.33	3.33		3.2	9.0	9.1	660	2300	3430	10.6	10.1	9.7
		20 + 20 + 20 + 20	2.28	2.28	2.28	2.28	3.6	9.1	9.5	800	2270	3430	10.4	10.0 10.0	9.6
		20 + 20 + 20 + 25	2.14	2.14	2.14	2.68	3.6	9.1 9.2	9.5	800	2270	3430	10.4		9.6 9.6
		20 + 20 + 20 + 35	1.94	1.94	1.94 1.67	3.39	3.6	9.2	9.5 9.5	800 800	2290	3430 3430	10.5 10.5	10.1 10.1	9.6
		20 + 20 + 20 + 50 20 + 20 + 20 + 60	1.67 1.55	1.67 1.55	1.55	4.18 4.65	3.6	9.2	9.5	800	2290 2310	3430	10.5	10.1	9.8
		20 + 20 + 25 + 25	2.04	2.04	2.56	2.56	3.6	9.3	9.5	800	2290	3430	10.7	10.2	9.6
		20 + 20 + 25 + 25	1.84	1.84	2.30	3.22	3.6	9.2	9.5	800	2290	3430	10.5	10.1	9.6
		20 + 20 + 25 + 50	1.62	1.62	2.02	4.04	3.6	9.3	9.5	800	2310	3430	10.7	10.1	9.8
		20 + 20 + 25 + 60	1.49	1.49	1.86	4.46	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		20 + 20 + 35 + 35	1.67	1.67	2.93	2.93	3.6	9.2	9.5	800	2290	3430	10.5	10.1	9.6
		20 + 20 + 35 + 50	1.49	1.49	2.60	3.72	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		20 + 20 + 35 + 60	1.38	1.38	2.41	4.13	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
	4	20 + 25 + 25 + 25	1.94	2.42	2.42	2.42	3.6	9.2	9.5	800	2290	3430	10.5	10.1	9.6
	room	20 + 25 + 25 + 35	1.75	2.19	2.19	3.07	3.6	9.2	9.5	800	2290	3430	10.5	10.1	9.6
		20 + 25 + 25 + 50	1.55	1.94	1.94	3.88	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		20 + 25 + 25 + 60	1.43	1.79	1.79	4.29	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		20 + 25 + 35 + 35	1.62	2.02	2.83	2.83	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		20 + 25 + 35 + 50	1.43	1.79	2.50	3.58	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		20 + 35 + 35 + 35	1.49	2.60	2.60	2.60	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		25 + 25 + 25 + 25	2.30	2.30	2.30	2.30	3.6	9.2	9.5	800	2290	3430	10.5	10.1	9.6
		25 + 25 + 25 + 35	2.09	2.09	2.09	2.93	3.6	9.2	9.5	800	2290	3430	10.5	10.1	9.6
		25 + 25 + 25 + 50	1.86	1.86	1.86	3.72	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		25 + 25 + 25 + 60	1.72	1.72	1.72	4.13	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		25 + 25 + 35 + 35	1.94	1.94	2.71	2.71	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		25 + 25 + 35 + 50	1.72	1.72	2.41	3.44	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8
		25 + 35 + 35 + 35	1.79	2.50	2.50	2.50	3.6	9.3	9.5	800	2310	3430	10.7	10.2	9.8

	l m	door unit			Coolin	g capacit	y (kW)			Power	consumpt	ion (W)	Stand	lard curre	nt (A)
		mbination	Roon	n cooling	capacity	(kW)	Tot	al capacity	(kW)	8.07	0		0001/	0001/	04014
	CO	mbination	A room	B room	C room	D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	2.0	_	_	_	1.8	2.0	2.7	480	530	950	2.4	2.3	2.2
	1	25	2.5	_	_	_	1.8	2.5	3.2	480	730	1080	3.4	3.2	3.1
		35	3.5	_	_	_	1.8	3.5	3.7	480	1120	1240	5.1	4.9	4.7
	room	50	5.0	_	_	_	1.8	5.0	5.8	480	1710	2100	7.9	7.5	7.2
		60	6.0	_	_	_	1.8	6.0	6.7	480	2140	2700	9.8	9.4	9.0
		20 + 20	2.00	2.00	_	_	3.0	4.0	5.8	550	930	1910	4.3	4.1	3.9
		20 + 25	2.00	2.50	_	-	3.0	4.5	6.1	550	1170	2060	5.4	5.1	4.9
		20 + 35	2.00	3.50	_	_	3.0	5.5	6.6	550	1590	2320	7.3	7.0	6.7
		20 + 50	1.97	4.93	_	_	3.0	6.9	7.5	550	2200	2830	10.1	9.7	9.3
		20 + 60	1.85	5.55	_		3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
		25 + 25	2.50	2.50	_	_	3.0	5.0	6.5	550	1360	2270	6.2	6.0	5.7
	2	25 + 35	2.46	3.44	_	_	3.0	5.9	6.8	550	1780	2470	8.2	7.8	7.5
	room	25 + 50	2.47	4.93	_	_	3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
		25 + 60	2.18	5.22	_		3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
등		35 + 35	3.45	3.45	_	_	3.0	6.9	7.5	550	2200	2680	10.1	9.7	9.3
Cooling operation		35 + 50	3.05	4.35	_	_	3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
<u>ē</u>		35 + 60	2.73	4.67	_	_	3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
0		50 + 50	3.70	3.70	_	_	3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
ng		50 + 60	3.36	4.04	_	_	3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
=		60 + 60	3.70	3.70	_	_	3.0	7.4	7.5	550	2430	2830	11.2	10.7	10.2
ဒိ		20 + 20 + 20	2.00	2.00	2.00	_	3.7	6.0	8.1	670	1450	2830	6.7	6.4	6.1
		20 + 20 + 25	2.00	2.00	2.50	_	3.7	6.5	8.1	670	1630	2830	7.5	7.2	6.9
		20 + 20 + 35	1.89	1.89	3.31	_	3.7	7.1	8.1	670	1950	2830	9.0	8.6	8.2
		20 + 20 + 50	1.73	1.73	4.33	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 20 + 60	1.56	1.56	4.68	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 25 + 25	1.94	2.43	2.43	_	3.7	6.8	8.1	670	1820	2830	8.4	8.0	7.7
	3	20 + 25 + 35	1.88	2.34	3.28	_	3.7	7.5	8.1	670	2130	2830	9.8	9.4	9.0
	room	20 + 25 + 50	1.64	2.05	4.11	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	100111	20 + 25 + 60	1.49	1.86	4.46	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 35 + 35	1.73	3.03	3.03	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 35 + 50	1.49	2.60	3.71	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 35 + 60	1.36	2.37	4.07	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 50 + 50	1.30	3.25	3.25	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		20 + 50 + 60	1.20	3.00	3.60	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
		25 + 25 + 25	2.37	2.37	2.37	_	3.7	7.1	8.1	670	1950	2830	9.0	8.6	8.2

	Indoor unit			Coolir	ng capacit	y (kW)			Power	consumpt	tion (W)	Stand	lard curre	nt (A)
		Roon	n cooling	capacity	(kW)	Tot	al capacity	(kW)				0001/	0001/	0.4014
•	combination	A room	B room	C room	D room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
	25 + 25 + 35	2.29	2.29	3.21		3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	25 + 25 + 50	1.95	1.95	3.90	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	25 + 25 + 60	1.77	1.77	4.25	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	25 + 35 + 35	2.05	2.87	2.87	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	25 + 35 + 50	1.77	2.48	3.55	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
3	25 + 35 + 60	1.63	2.28	3.90	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
roor	n 25 + 50 + 50	1.56	3.12	3.12	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	25 + 50 + 60	1.44	2.89	3.47	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	35 + 35 + 35	2.60	2.60	2.60	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	35 + 35 + 50	2.28	2.28	3.25	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	35 + 35 + 60	2.10	2.10	3.60	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	35 + 50 + 50	2.02	2.89	2.89	_	3.7	7.8	8.1	670	2320	2830	10.7	10.2	9.8
	20 + 20 + 20 + 20	1.95	1.95	1.95	1.95	4.4	7.8	8.7	890	2180	2830	9.9	9.5	9.1
	20 + 20 + 20 + 25		1.84	1.84	2.29	4.4	7.8	8.7	890	2180	2830	9.9	9.5	9.1
	20 + 20 + 20 + 35		1.66	1.66	2.91	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
=	20 + 20 + 20 + 50		1.44	1.44	3.59	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
≧	20 + 20 + 20 + 60	1.33	1.33	1.33	4.00	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
<u> </u>	20 + 20 + 25 + 25	1.76	1.76	2.19	2.19	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
	20 + 20 + 25 + 35		1.58	1.98	2.77	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
20	20 + 20 + 25 + 50		1.37	1.72	3.43	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
	20 + 20 + 25 + 60	1.28	1.28	1.60	3.84	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
3	20 + 20 + 35 + 35	1.44	1.44	2.51	2.51	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
۱,	20 + 20 + 35 + 50	1.28	1.28	2.24	3.20	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	20 + 20 + 35 + 60		1.19	2.07	3.56	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
4	20 + 25 + 25 + 25	1.66	2.08	2.08	2.08	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
roon		1.50	1.88	1.88	2.63	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
	20 + 25 + 25 + 50	1.33	1.67	1.67	3.33	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	20 + 25 + 25 + 60	1.23	1.54	1.54	3.69	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	20 + 25 + 35 + 35		1.72	2.40	2.40	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
	20 + 25 + 35 + 50	1.23	1.54	2.15	3.08	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	20 + 35 + 35 + 35	1.28	2.24	2.24	2.24	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	25 + 25 + 25 + 25		1.98	1.98	1.98	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
	25 + 25 + 25 + 35		1.80	1.80	2.51	4.4	7.9	8.7	890	2200	2830	10.0	9.6	9.2
	25 + 25 + 25 + 50	1.60	1.60	1.60	3.20	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	25 + 25 + 25 + 60	1.48	1.48	1.48	3.56	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	25 + 25 + 35 + 35		1.67	2.33	2.33	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	25 + 25 + 35 + 50		1.48	2.07	2.96	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3
	25 + 35 + 35 + 35	1.54	2.15	2.15	2.15	4.4	8.0	8.7	890	2220	2830	10.1	9.7	9.3

SCM100ZM-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

						Hootin	g capacity	, (IAM)				Dower	consump	tion (M)	Chand		- mt (A)
	Inc	door unit		Poo	m heating			/ (KVV)	Total	al capacity	(1,11/1)	Power	Consump	tion (w)	Stand	ard curre	ent (A)
	cor	mbination	A room	B room		D room	· /	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	3.0	_	_		_		1.5	3.0	3.7	700	1010	1330	4.6	4.4	4.3
	<u> </u>	25	3.4				_		1.5	3.4	4.2	700	1150	1540	5.3	5.1	4.8
	1	35	4.5	_	_	_	_	_	1.5	4.5	5.0	700	1540	1840	7.1	6.8	6.5
	room	50	5.8						1.5	5.8	6.5	700	2000	2410	9.2	8.8	8.4
	ŀ	60	6.8						1.5	6.8	7.5	700	2360	2760	10.8	10.4	9.9
		20 + 20	3.00	3.00	_	_	_	_	2.1	6.0	7.4	750	1510	1460	6.9	6.6	6.4
	l l	20 + 25	2.84	3.56	_	_	_	_	2.1	6.4	7.9	750	1630	2210	7.5	7.2	6.9
		20 + 35	2.73	4.77	_	_	_	_	2.1	7.5	8.7	750	1950	2520	9.0	8.6	8.2
	ľ	20 + 50	2.51	6.29	_	_	_	_	2.1	8.8	10.2	750	2380	3220	10.9	10.5	10.0
	<u> </u>	20 + 60	2.45	7.35	_	_	_	_	2.1	9.8	11.2	750	2780	3620	12.8	12.2	11.7
		25 + 25	3.40	3.40	_	_	_	_	2.1	6.8	8.4	750	1740	2420	8.0	7.6	7.3
	_ [25 + 35	3.29	4.61	_	_	_	_	2.1	7.9	9.2	750	2100	2820	9.6	9.2	8.8
	2 room	25 + 50	3.07	6.13	_	_	_	_	2.1	9.2	10.7	750	2580	3610	11.8	11.3	10.9
	100111	25 + 60	3.00	7.20	_	_	_	_	2.1	10.2	11.7	750	2980	3790	13.7	13.1	12.5
		35 + 35	4.50	4.50	_	_	_	_	2.1	9.0	10.0	750	2470	3210	11.3	10.8	10.4
		35 + 50	4.24	6.06	_	_	_	_	2.1	10.3	11.5	750	2980	3710	13.7	13.1	12.5
		35 + 60	4.16	7.14	_	_	_	_	2.1	11.3	12.5	750	3430	4100	15.7	15.1	14.4
		50 + 50	5.80	5.80	_	_	_	_	2.1	11.6	13.0	750	3580	4320	16.4	15.7	15.1
		50 + 60	5.45	6.55	_	_	_	_	2.1	12.0	13.5	750	3720	4520	17.1	16.3	15.7
_		60 + 60	6.00	6.00	_	_	_	_	2.1	12.0	13.5	750	3720	4520	17.1	16.3	15.7
유		20 + 20 + 20	3.00	3.00	3.00	_	_	_	3.2	9.0	11.1	780	2230	3350	10.2	9.8	9.4
a l		20 + 20 + 25	2.89	2.89	3.62	_	_	_	3.2	9.4	11.6	780	2350	3550	10.8	10.3	9.9
ᇫ		20 + 20 + 35	2.80	2.80	4.90	_	_	_	3.2	10.5	12.4	780	2710	3820	12.4	11.9	11.4
g		20 + 20 + 50	2.62	2.62	6.56	_	_	_	3.2	11.8	13.5	780	3210	4190	14.7	14.1	13.5
들		20 + 20 + 60	2.40	2.40	7.20	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
Heating operation		20 + 25 + 25	2.80	3.50	3.50	_	_	_	3.2	9.8	12.1	780	2510	3720	11.5	11.0	10.6
피		20 + 25 + 35	2.73	3.41	4.77	_	_	_	3.2	10.9	12.9	780	2910	3990	13.4	12.8	12.2
	L	20 + 25 + 50	2.53	3.16	6.32	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
		20 + 25 + 60	2.29	2.86	6.86	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
	L	20 + 35 + 35	2.67	4.67	4.67	_	_	_	3.2	12.0	13.5	780	3360	4190	15.4	14.8	14.1
	L	20 + 35 + 50	2.29	4.00	5.71	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
		20 + 35 + 60	2.09	3.65	6.26	_	_	_	3.2	12.0	13.5	780	3340	4190	15.3	14.7	14.1
	3	20 + 50 + 50	2.00	5.00	5.00	_	_	_	3.2	12.0	13.5	780	3340	4190	15.3	14.7	14.1
	room	20 + 50 + 60	1.85	4.62	5.54	_	_	_	3.2	12.0	13.5	780	3340	4190	15.3	14.7	14.1
		20 + 60 + 60	1.71	5.14	5.14	_			3.2	12.0	13.5	780	3330	4190	15.3	14.6	14.0
		25 + 25 + 25	3.40	3.40	3.40	_	_	_	3.2	10.2	12.6	780	2710	3880	12.4	11.9	11.4
		25 + 25 + 35	3.32	3.32	4.65				3.2	11.3	13.4	780	3110	4120	14.3	13.7	13.1
		25 + 25 + 50	3.00	3.00	6.00	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
		25 + 25 + 60	2.73	2.73	6.55				3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
		25 + 35 + 35	3.16	4.42	4.42	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
		25 + 35 + 50	2.73	3.82	5.45	_	_		3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1
		25 + 35 + 60	2.50	3.50	6.00	_	_	_	3.2	12.0	13.5	780	3340	4190	15.3	14.7	14.1
	-	25 + 50 + 50	2.40	4.80	4.80				3.2	12.0	13.5	780	3340	4190	15.3	14.7	14.1
		25 + 50 + 60	2.22	4.44	5.33	_	_	_	3.2	12.0	13.5	780	3330	4190	15.3	14.6	14.0
	-	25 + 60 + 60	2.07	4.97	4.97				3.2	12.0	13.5	780	3330	4190	15.3	14.6	14.0
		35 + 35 + 35	4.00	4.00	4.00	_	_	_	3.2	12.0	13.5	780	3350	4190	15.4	14.7	14.1

	Indoor unit					g capacity	y (kW)			(1.342)	Power	consump	tion (W)	Stand	ard curr	ent (
(combination	A room	Roo B room	m heating C room	D room		F room	Tota Min.	I capacity Standard	` '	Min.	Standard	Max.	220V	230V	24
	35 + 35 + 50	3.50	3.50	5.00	— —	E room	r room	3.2	12.0	Max. 13.5	780	3340	4190	15.3	14.7	14
	35 + 35 + 60	3.23	3.23	5.54	_	_	_	3.2	12.0	13.5	780	3340	4190	15.3	14.7	14
3	35 + 50 + 50	3.11	4.44	4.44	_	_	_	3.2	12.0	13.5	780	3330	4190	15.3	14.6	14
room	35 + 50 + 60	2.90	4.14	4.97		_	_	3.2	12.0	13.5	780	3330	4190	15.3	14.6	14
	35 + 60 + 60 50 + 50 + 50	2.71 4.00	4.65	4.65 4.00				3.2	12.0 12.0	13.5 13.5	780 780	3320 3330	4190 4190	15.2 15.3	14.6 14.6	14
	50 + 50 + 60	3.75	3.75	4.50				3.2	12.0	13.5	780	3320	4190	15.2	14.6	14
	20 + 20 + 20 + 20	3.00	3.00	3.00	3.00	_	_	3.6	12.0	13.5	950	3230	3840	14.7	14.1	13
	20 + 20 + 20 + 25	2.82	2.82	2.82	3.53	_	_	3.6	12.0	13.5	950	3230	3840	14.7	14.1	1:
	20 + 20 + 20 + 35	2.53	2.53	2.53	4.42	_	_	3.6	12.0	13.5	950	3230	3840	14.7	14.1	1:
	20 + 20 + 20 + 50 20 + 20 + 20 + 60	2.18	2.18	2.18	5.45	_		3.6	12.0 12.0	13.5	950 950	3220	3840	14.7	14.0	1
	20 + 20 + 20 + 60	2.00	2.00	2.00 3.33	6.00 3.33			3.6	12.0	13.5 13.5	950	3220 3230	3840 3840	14.7	14.0	1
	20 + 20 + 25 + 35	2.40	2.40	3.00	4.20	_	_	3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	20 + 20 + 25 + 50	2.09	2.09	2.61	5.22	_	_	3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	20 + 20 + 25 + 60	1.92	1.92	2.40	5.76	_	_	3.6	12.0	13.5	950	3340	3840	15.2	14.5	1
	20 + 20 + 35 + 35	2.18	2.18	3.82	3.82	_	_	3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	20 + 20 + 35 + 50 20 + 20 + 35 + 60	1.92 1.78	1.92 1.78	3.36	4.80 5.33			3.6	12.0 12.0	13.5 13.5	950 950	3340 3210	3840 3840	15.2 14.6	14.5	1
	20 + 20 + 50 + 50	1.71	1.71	4.29	4.29		_	3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	20 + 20 + 50 + 60	1.60	1.60	4.00	4.80	_	_	3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	20 + 20 + 60 + 60	1.50	1.50	4.50	4.50	_	_	3.6	12.0	13.5	950	3200	3840	14.6	13.9	1
	20 + 25 + 25 + 25	2.53	3.16	3.16	3.16	_		3.6	12.0	13.5	950	3230	3840	14.7	14.1	1
	20 + 25 + 25 + 35	2.29	2.86	2.86	4.00	_		3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
4	20 + 25 + 25 + 50 20 + 25 + 25 + 60	2.00 1.85	2.50	2.50	5.00 5.54	_	_	3.6	12.0 12.0	13.5 13.5	950 950	3220 3340	3840 3840	14.7 15.2	14.0	1
4 room		2.09	2.61	3.65	3.65			3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	20 + 25 + 35 + 50	1.85	2.31	3.23	4.62	_	_	3.6	12.0	13.5	950	3340	3840	15.2	14.5	1
	20 + 25 + 35 + 60	1.71	2.14	3.00	5.14	_	_	3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	20 + 25 + 50 + 50	1.66	2.07	4.14	4.14	_	_	3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	20 + 25 + 50 + 60	1.55	1.94	3.87	4.65			3.6	12.0	13.5	950	3200	3840	14.6	13.9	1
	20 + 35 + 35 + 35	1.92 1.71	3.36	3.36	3.36 4.29			3.6	12.0 12.0	13.5	950 950	3340 3210	3840 3840	15.2 14.6	14.5	1
	20 + 35 + 35 + 50 20 + 35 + 35 + 60	1.60	3.00 2.80	3.00 2.80	4.29			3.6	12.0	13.5 13.5	950	3210	3840	14.6	14.0	1
	20 + 35 + 50 + 50	1.55	2.71	3.87	3.87			3.6	12.0	13.5	950	3200	3840	14.6	13.9	1
	25 + 25 + 25 + 25	3.00	3.00	3.00	3.00	_	_	3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	25 + 25 + 25 + 35	2.73	2.73	2.73	3.82	_	_	3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	25 + 25 + 25 + 50	2.40	2.40	2.40	4.80	_	_	3.6	12.0	13.5	950	3340	3840	15.2	14.5	1
	25 + 25 + 25 + 60	2.22	2.22	2.22	5.33	_	_	3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	25 + 25 + 35 + 35	2.50	2.50	3.50	3.50	_	_	3.6	12.0	13.5	950	3220	3840	14.7	14.0	1
	25 + 25 + 35 + 50 25 + 25 + 35 + 60	2.22	2.22	3.11 2.90	4.44 4.97			3.6	12.0 12.0	13.5 13.5	950 950	3210 3210	3840 3840	14.6 14.6	14.0	1
	25 + 25 + 50 + 50	2.00	2.00	4.00	4.00			3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	25 + 25 + 50 + 60	1.88	1.88	3.75	4.50	_	_	3.6	12.0	13.5	950	3200	3840	14.6	13.9	1
	25 + 35 + 35 + 35	2.31	3.23	3.23	3.23	_	_	3.6	12.0	13.5	950	3340	3840	15.2	14.5	1
	25 + 35 + 35 + 50	2.07	2.90	2.90	4.14	_	_	3.6	12.0	13.5	950	3210	3840	14.6	14.0	1
	25 + 35 + 35 + 60	1.94	2.71	2.71	4.65			3.6	12.0	13.5	950	3200	3840	14.6	13.9	1
	25 + 35 + 50 + 50 35 + 35 + 35 + 35	1.88 3.00	2.63 3.00	3.75	3.75	_	_	3.6	12.0 12.0	13.5 13.5	950 950	3200 3210	3840 3840	14.6 14.6	13.9	1
	35 + 35 + 35 + 50	2.71	2.71	2.71	3.87			3.6	12.0	13.5	950	3200	3840	14.6	13.9	1
	20 + 20 + 20 + 20 + 20	2.40	2.40	2.40	2.40	2.40	_	4.0	12.0	13.5	1050	2930	3400	13.3	12.8	1
	20 + 20 + 20 + 20 + 25	2.29	2.29	2.29	2.29	2.86	_	4.0	12.0	13.5	1050	2920	3400	13.3	12.7	1
	20 + 20 + 20 + 20 + 35	2.09	2.09	2.09	2.09	3.65	_	4.0	12.0	13.5	1050	2920	3400	13.3	12.7	1
	20 + 20 + 20 + 20 + 50	1.85	1.85	1.85	1.85	4.62	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 20 + 20 + 60	1.71	1.71	1.71	1.71	5.14		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 20 + 25 + 25 20 + 20 + 20 + 25 + 35	2.18	2.18	2.18	2.73	2.73 3.50		4.0	12.0 12.0	13.5 13.5	1050 1050	2920 2920	3400 3400	13.3	12.7 12.7	1
	20 + 20 + 20 + 25 + 50	1.78	1.78	1.78	2.22	4.44		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 20 + 25 + 60	1.66	1.66	1.66	2.07	4.97	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 20 + 35 + 35	1.85	1.85	1.85	3.23	3.23	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 20 + 35 + 50	1.66	1.66	1.66	2.90	4.14		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 20 + 35 + 60 20 + 20 + 20 + 50 + 50	1.55 1.50	1.55 1.50	1.55 1.50	2.71 3.75	4.65 3.75	_	4.0	12.0 12.0	13.5 13.5	1050 1050	2900 2900	3400 3400	13.2	12.6 12.6	1
	20 + 20 + 20 + 50 + 50	2.09	2.09	2.61	2.61	2.61		4.0	12.0	13.5	1050	2900	3400	13.2	12.7	1
	20 + 20 + 25 + 25 + 35	1.92	1.92	2.40	2.40	3.36		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 25 + 25 + 50	1.71	1.71	2.14	2.14	4.29	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 25 + 25 + 60	1.60	1.60	2.00	2.00	4.80	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
5	20 + 20 + 25 + 35 + 35	1.78	1.78	2.22	3.11	3.11		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
room	20 + 20 + 25 + 35 + 50 20 + 20 + 25 + 35 + 60	1.60 1.50	1.60 1.50	2.00 1.88	2.80	4.00 4.50		4.0	12.0 12.0	13.5 13.5	1050 1050	2910	3400 3400	13.2	12.7 12.6	1
	20 + 20 + 25 + 35 + 60	1.66	1.66	2.90	2.03	2.90		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 20 + 35 + 35 + 50	1.50	1.50	2.63	2.63	3.75	_	4.0	12.0	13.5	1050	2900	3400	13.2	12.6	1
	20 + 25 + 25 + 25 + 25	2.00	2.50	2.50	2.50	2.50	_	4.0	12.0	13.5	1050	2920	3400	13.3	12.7	1
	20 + 25 + 25 + 25 + 35	1.85	2.31	2.31	2.31	3.23	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 25 + 25 + 25 + 50	1.66	2.07	2.07	2.07	4.14		4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	20 + 25 + 25 + 25 + 60	1.55 1.71	1.94	1.94 2.14	1.94	4.65	_	4.0	12.0	13.5	1050	2900	3400	13.2	12.6	1
	20 + 25 + 25 + 35 + 35 20 + 25 + 25 + 35 + 50	1.71	2.14 1.94	1.94	3.00 2.71	3.00		4.0	12.0	13.5 13.5	1050	2910 2900	3400 3400	13.2	12.7 12.6	1
	20 + 25 + 25 + 35 + 35	1.60	2.00	2.80	2.71	2.80		4.0	12.0	13.5	1050	2900	3400	13.2	12.6	1
	20 + 35 + 35 + 35 + 35	1.50	2.63	2.63	2.63	2.63		4.0	12.0	13.5	1050	2900	3400	13.2	12.7	1
	25 + 25 + 25 + 25 + 25	2.40	2.40	2.40	2.40	2.40	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	25 + 25 + 25 + 25 + 35	2.22	2.22	2.22	2.22	3.11	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	25 + 25 + 25 + 25 + 50	2.00	2.00	2.00	2.00	4.00	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	25 + 25 + 25 + 25 + 60	1.88	1.88	1.88	1.88	4.50		4.0	12.0	13.5	1050	2900	3400	13.2	12.6	1
	25 + 25 + 25 + 35 + 35	2.07	2.07	2.07	2.90	2.90	_	4.0	12.0	13.5	1050	2910	3400	13.2	12.7	1
	25 + 25 + 25 + 35 + 50 25 + 25 + 35 + 35 + 35	1.88 1.94	1.88	1.88 2.71	2.63	3.75 2.71	_	4.0	12.0 12.0	13.5 13.5	1050 1050	2900 2900	3400 3400	13.2	12.6 12.6	1
			1.54	4./1	4.//	4./1		7.0	12.0	10.0	1000	2300	J J-100	1 10.2	12.0	1

	Indoor unit					g capacity	/ (kW)				Power	consump	tion (W)	Stand	ard curr	ent (A)
(combination	A room	Roo B room	m cooling C room	D room	(kW) E room	F room	Tota Min.	al capacity Standard	(kW) Max.	Min.	Standard	Max.	220V	230V	240
	20	2.0	-	-	-	-	-	1.8	2.0	2.8	650	750	1100	3.4	3.3	3.2
1	25	2.5	_	_	_	_	_	1.8	2.5	3.4	650	950	1350	4.4	4.2 6.1	4.0 5.9
room	35	3.5 5.0					_	1.8	3.5 5.0	3.9 6.1	650 650	2000	1600 2500	6.4 9.2	8.8	8.4
	60	6.0	_	_	_	_	_	1.8	6.0	7.0	650	2450	3000	11.2	10.8	10.3
	20 + 20	2.00	2.00	_	_	_	_	3.0	4.0	5.6	740	910	1460	4.2	4.0	3.8
	20 + 25 20 + 35	2.00	2.50 3.50	_			_	3.0	4.5 5.5	6.2	740 740	1050 1430	1820 2020	4.8 6.6	4.6 6.3	6.0
	20 + 50	2.00	5.00	_	_	_	_	3.0	7.0	8.9	740	2180	2820	10.0	9.6	9.2
	20 + 60	2.00	6.00	_	_	_	_	3.0	8.0	9.8	740	2530	3360	11.6	11.1	10.6
	25 + 25	2.50 2.50	2.50		_	_		3.0	5.0	6.8	740	1350	2200	6.2	5.9	5.7
2 room	25 + 35 25 + 50	2.50	3.50 5.00	_			_	3.0	6.0 7.5	7.3 9.5	740 740	1720 2350	2320 3220	7.9 10.8	7.6 10.3	9.9
100111	25 + 60	2.50	6.00	_	_	_	_	3.0	8.5	9.8	740	2680	3360	12.3	11.8	11.3
	35 + 35	3.50	3.50	_	_	_	_	3.0	7.0	7.8	740	2180	2820	10.0	9.6	9.2
	35 + 50 35 + 60	3.50 3.50	5.00 6.00	_	_	_	_	3.0	8.5 9.5	10.0 10.9	740	2680 3120	3620 3990	12.3 14.3	11.8 13.7	11.3
	50 + 50	5.00	5.00				_	3.0	10.0	12.0	740	3350	4400	15.4	14.7	14.1
	50 + 60	4.55	5.45	_	_	_	_	3.0	10.0	12.0	740	3350	4400	15.4	14.7	14.
	60 + 60	5.00	5.00	_	_	_	_	3.0	10.0	12.0	740	3340	4400	15.3	14.7	14.
	20 + 20 + 20 20 + 20 + 25	2.00	2.00	2.00	_		_	3.7	6.0	9.0	880 880	1460 1650	2560 2700	6.7 7.6	6.4 7.2	6.1
	20 + 20 + 35	2.00	2.00	3.50				3.7	7.5	9.5	880	1980	3120	9.1	8.7	8.3
	20 + 20 + 50	2.00	2.00	5.00	_	_	_	3.7	9.0	11.7	880	2600	4120	11.9	11.4	10.9
	20 + 20 + 60	2.00	2.00	6.00	_	_		3.7	10.0	12.0	880	3120	4250	14.3	13.7	13.1
	20 + 25 + 25 20 + 25 + 35	2.00	2.50 2.50	2.50 3.50	_	_	_	3.7	7.0 8.0	9.6 10.1	880 880	1850 2320	3210 3630	8.5 10.7	8.1 10.2	7.8 9.8
	20 + 25 + 50	2.00	2.50	5.00	_	_	_	3.7	9.5	12.0	880	2980	4250	13.7	13.1	12.
	20 + 25 + 60	1.90	2.38	5.71	_	_	_	3.7	10.0	12.0	880	3120	4250	14.3	13.7	13.
	20 + 35 + 35	2.00	3.50	3.50	_	_	_	3.7	9.0	10.6	880	2780	3750	12.8	12.2	11.
	20 + 35 + 50 20 + 35 + 60	1.90 1.74	3.33	4.76 5.22				3.7	10.0	12.0 12.0	880 880	3120 3110	4250 4250	14.3 14.3	13.7 13.7	13.
	20 + 50 + 50	1.74	4.17	4.17	_	_	_	3.7	10.0	12.0	880	3110	4250	14.3	13.7	13.
	20 + 50 + 60	1.54	3.85	4.62	_	_	_	3.7	10.0	12.0	880	3110	4250	14.3	13.7	13.
	20 + 60 + 60	1.43	4.29	4.29	_	_	_	3.7	10.0	12.0	880	3100	4250	14.2	13.6	13.
3	25 + 25 + 25	2.50 2.50	2.50 2.50	2.50 3.50	_	_	_	3.7 3.7	7.5 8.5	10.2 10.7	880 880	2030 2520	3640 3900	9.3 11.6	8.9 11.1	10.
room	25 + 25 + 35 25 + 25 + 50	2.50	2.50	5.00			_	3.7	10.0	12.0	880	3120	4250	14.3	13.7	13.
	25 + 25 + 60	2.27	2.27	5.45	_	_	_	3.7	10.0	12.0	880	3120	4250	14.3	13.7	13.
	25 + 35 + 35	2.50	3.50	3.50	_	_	_	3.7	9.5	11.2	880	2980	3990	13.7	13.1	12.
	25 + 35 + 50 25 + 35 + 60	2.27	3.18 2.92	4.55 5.00		_		3.7	10.0	12.0 12.0	880 880	3120 3110	4250 4250	14.3 14.3	13.7 13.7	13.
	25 + 50 + 50	2.00	4.00	4.00	_	_		3.7	10.0	12.0	880	3110	4250	14.3	13.7	13.
	25 + 50 + 60	1.85	3.70	4.44	_	_	_	3.7	10.0	12.0	880	3100	4250	14.2	13.6	13.0
	25 + 60 + 60	1.72	4.14	4.14				3.7	10.0	12.0	880	3100	4250	14.2	13.6	13.0
	35 + 35 + 35 35 + 35 + 50	3.33 2.92	3.33 2.92	3.33 4.17	_	_	_	3.7	10.0	11.7 12.0	880 880	3120 3110	4180 4250	14.3 14.3	13.7 13.7	13.1
	35 + 35 + 60	2.69	2.69	4.62			_	3.7	10.0	12.0	880	3110	4250	14.3	13.7	13.
	35 + 50 + 50	2.59	3.70	3.70	_	_	_	3.7	10.0	12.0	880	3100	4250	14.2	13.6	13.0
	35 + 50 + 60	2.41	3.45	4.14	_	_	_	3.7	10.0	12.0	880	3100	4250	14.2	13.6	13.
	35 + 60 + 60 50 + 50 + 50	2.26 3.33	3.87	3.87 3.33			_	3.7 3.7	10.0	12.0 12.0	880 880	3090 3100	4250 4250	14.2 14.2	13.6 13.6	13. 13.
	50 + 50 + 60	3.13	3.13	3.75			_	3.7	10.0	12.0	880	3090	4250	14.2	13.6	13.
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	_	_	4.4	8.0	11.2	1100	2050	3680	9.3	8.9	8.6
	20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	_		4.4	8.5	11.8	1100	2320	3890	10.6	10.1	9.7
	20 + 20 + 20 + 35 20 + 20 + 20 + 50	2.00 1.82	2.00 1.82	2.00 1.82	3.50 4.55	_	_	4.4 4.4	9.5	12.0 12.0	1100	2820 3020	4050 4050	12.8 13.7	12.3 13.1	11.
	20 + 20 + 20 + 60	1.67	1.67	1.67	5.00			4.4	10.0	12.0	1100	3020	4050	13.7	13.1	12.
	20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	_	_	4.4	9.0	12.0	1100	2520	4050	11.5	11.0	10.
	20 + 20 + 25 + 35	2.00	2.00	2.50	3.50	_	_	4.4	10.0	12.0	1100	3030	4050	13.8	13.2	12.
	20 + 20 + 25 + 50 20 + 20 + 25 + 60	1.74 1.60	1.74 1.60	2.17	4.35 4.80	_		4.4	10.0	12.0 12.0	1100	3020	4050 4050	13.7 13.7	13.1	12.
	20 + 20 + 25 + 60	1.82	1.82	3.18	3.18			4.4	10.0	12.0	1100	3020	4050	13.7	13.1	12.
	20 + 20 + 35 + 50	1.60	1.60	2.80	4.00	_	_	4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12.
	20 + 20 + 35 + 60	1.48	1.48	2.59	4.44	_		4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12.
	20 + 20 + 50 + 50 20 + 20 + 50 + 60	1.43	1.43	3.57	3.57 4.00	_	_	4.4 4.4	10.0	12.0 12.0	1100	3010	4050 4050	13.7 13.7	13.1	12.
	20 + 20 + 60 + 60	1.25	1.25	3.75	3.75			4.4	10.0	12.0	1100	2990	4050	13.6	13.0	12.
	20 + 25 + 25 + 25	2.00	2.50	2.50	2.50	_		4.4	9.5	12.0	1100	2820	4050	12.8	12.3	11.
	20 + 25 + 25 + 35	1.90	2.38	2.38	3.33	_	_	4.4	10.0	12.0	1100	3030	4050	13.8	13.2	12.
	20 + 25 + 25 + 50 20 + 25 + 25 + 60	1.67 1.54	2.08 1.92	2.08 1.92	4.17 4.62	_	_	4.4 4.4	10.0	12.0 12.0	1100	3020 3010	4050 4050	13.7 13.7	13.1 13.1	12.
4	20 + 25 + 35 + 35	1.74	2.17	3.04	3.04	_	_	4.4	10.0	12.0	1100	3020	4050	13.7	13.1	12.
room	20 + 25 + 35 + 50	1.54	1.92	2.69	3.85	_	_	4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12.
	20 + 25 + 35 + 60	1.43	1.79	2.50	4.29	_	_	4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12
	20 + 25 + 50 + 50 20 + 25 + 50 + 60	1.38 1.29	1.72 1.61	3.45 3.23	3.45 3.87	_	_	4.4 4.4	10.0	12.0 12.0	1100	3000	4050 4050	13.7 13.7	13.1 13.1	12
	20 + 25 + 60 + 60	1.29	1.52	3.64	3.64	_	_	4.4	10.0	12.0	1100	2990	4050	13.7	13.0	12
	20 + 35 + 35 + 35	1.60	2.80	2.80	2.80	_		4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12
	20 + 35 + 35 + 50	1.43	2.50	2.50	3.57	_	_	4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12.
	20 + 35 + 35 + 60 20 + 35 + 50 + 50	1.33	2.33	2.33 3.23	4.00 3.23		_	4.4	10.0	12.0 12.0	1100	3000	4050 4050	13.7 13.7	13.1 13.1	12.
	25 + 25 + 25 + 25	2.50	2.20	2.50	2.50		_	4.4	10.0	12.0	1100	3030	4050	13.7	13.1	12.
	25 + 25 + 25 + 35	2.27	2.27	2.27	3.18	_	_	4.4	10.0	12.0	1100	3020	4050	13.7	13.1	12.
	25 + 25 + 25 + 50	2.00	2.00	2.00	4.00	_		4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12
	25 + 25 + 25 + 60	1.85 2.08	1.85	1.85	4.44	_	_	4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12
	25 + 25 + 35 + 35 25 + 25 + 35 + 50	1.85	2.08 1.85	2.92	2.92 3.70			4.4 4.4	10.0	12.0 12.0	1100	3020 3010	4050 4050	13.7 13.7	13.1 13.1	12.
	25 + 25 + 35 + 60	1.72	1.72	2.41	4.14	_	_	4.4	10.0	12.0	1100	3000	4050	13.7	13.1	12.
	25 + 25 + 50 + 50	1.67	1.67	3.33	3.33	_	_	4.4	10.0	12.0	1100	3000	4050	13.7	13.1	12.
		1.56	1.56	3.13	3.75	_	_	4.4	10.0	12.0	1100	2990	4050	13.6	13.0	12.
	25 + 25 + 50 + 60 25 + 35 + 35 + 35	1.92	2.69	2.69	2.69			4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12.

		landa a manda				Coolin	g capacity	/ (kW)				Power	consump	tion (W)	Stand	ard curre	ent (A)
		Indoor unit		Roo	m cooling	capacity	(kW)		Tota	al capacity	(kW)		la		0001/	2001/	04014
	(combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		25 + 35 + 35 + 60	1.61	2.26	2.26	3.87	_	_	4.4	10.0	12.0	1100	3000	4050	13.7	13.1	12.5
	4	25 + 35 + 50 + 50	1.56	2.19	3.13	3.13	_	_	4.4	10.0	12.0	1100	2990	4050	13.6	13.0	12.5
	room	35 + 35 + 35 + 35	2.50	2.50	2.50	2.50	_	_	4.4	10.0	12.0	1100	3010	4050	13.7	13.1	12.6
		35 + 35 + 35 + 50	2.26	2.26	2.26	3.23	_	_	4.4	10.0	12.0	1100	3000	4050	13.7	13.1	12.5
		20 + 20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	2.00	_	5.1	10.0	12.0	1210	2860	4030	13.0	12.4	11.9
		20 + 20 + 20 + 20 + 25	1.90	1.90	1.90	1.90	2.38	_	5.1	10.0	12.0	1210	2860	4030	13.0	12.4	11.9
		20 + 20 + 20 + 20 + 35	1.74	1.74	1.74	1.74	3.04	_	5.1	10.0	12.0	1210	2850	4030	13.0	12.4	11.9
		20 + 20 + 20 + 20 + 50	1.54	1.54	1.54	1.54	3.85	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 20 + 20 + 60	1.43	1.43	1.43	1.43	4.29	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 20 + 25 + 25	1.82	1.82	1.82	2.27	2.27	_	5.1	10.0	12.0	1210	2860	4030	13.0	12.4	11.9
		20 + 20 + 20 + 25 + 35	1.67	1.67	1.67	2.08	2.92	_	5.1	10.0	12.0	1210	2850	4030	13.0	12.4	11.9
		20 + 20 + 20 + 25 + 50	1.48	1.48	1.48	1.85	3.70	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 20 + 25 + 60	1.38	1.38	1.38	1.72	4.14	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 20 + 35 + 35	1.54	1.54	1.54	2.69	2.69	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 20 + 35 + 50	1.38	1.38	1.38	2.41	3.45	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 20 + 35 + 60	1.29	1.29	1.29	2.26	3.87	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
_		20 + 20 + 20 + 50 + 50	1.25	1.25	1.25	3.13	3.13	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
5		20 + 20 + 25 + 25 + 25	1.74	1.74	2.17	2.17	2.17	_	5.1	10.0	12.0	1210	2850	4030	13.0	12.4	11.9
ati		20 + 20 + 25 + 25 + 35	1.60	1.60	2.00	2.00	2.80	_	5.1	10.0	12.0	1210	2850	4030	13.0	12.4	11.9
operation		20 + 20 + 25 + 25 + 50	1.43	1.43	1.79	1.79	3.57	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
ŏ		20 + 20 + 25 + 25 + 60	1.33	1.33	1.67	1.67	4.00	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
Cooling	5	20 + 20 + 25 + 35 + 35	1.48	1.48	1.85	2.59	2.59	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
₩	room	20 + 20 + 25 + 35 + 50	1.33	1.33	1.67	2.33	3.33	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
Š		20 + 20 + 25 + 35 + 60	1.25	1.25	1.56	2.19	3.75	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
Ŭ		20 + 20 + 35 + 35 + 35	1.38	1.38	2.41	2.41	2.41	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 20 + 35 + 35 + 50	1.25	1.25	2.19	2.19	3.13	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
		20 + 25 + 25 + 25 + 25	1.67	2.08	2.08	2.08	2.08	_	5.1	10.0	12.0	1210	2850	4030	13.0	12.4	11.9
		20 + 25 + 25 + 25 + 35	1.54	1.92	1.92	1.92	2.69	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 25 + 25 + 25 + 50	1.38	1.72	1.72	1.72	3.45		5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 25 + 25 + 25 + 60	1.29	1.61	1.61	1.61	3.87	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
		20 + 25 + 25 + 35 + 35	1.43	1.79	1.79	2.50	2.50	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 25 + 25 + 35 + 50	1.29	1.61	1.61	2.26	3.23	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
		20 + 25 + 35 + 35 + 35	1.33	1.67	2.33	2.33	2.33	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		20 + 35 + 35 + 35 + 35	1.25	2.19	2.19	2.19	2.19	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
		25 + 25 + 25 + 25 + 25	2.00	2.00	2.00	2.00	2.00	_	5.1	10.0	12.0	1210	2850	4030	13.0	12.4	11.9
		25 + 25 + 25 + 25 + 35	1.85	1.85	1.85	1.85	2.59	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		25 + 25 + 25 + 25 + 50	1.67	1.67	1.67	1.67	3.33		5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		25 + 25 + 25 + 25 + 60	1.56	1.56	1.56	1.56	3.75	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
		25 + 25 + 25 + 35 + 35	1.72	1.72	1.72	2.41	2.41	_	5.1	10.0	12.0	1210	2840	4030	12.9	12.4	11.8
		25 + 25 + 25 + 35 + 50	1.56	1.56	1.56	2.19	3.13	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8
		25 + 25 + 35 + 35 + 35	1.61	1.61	2.26	2.26	2.26	_	5.1	10.0	12.0	1210	2830	4030	12.9	12.3	11.8

SCM100ZM-S Table of Indoor unit combination with other indoor unit

	Indoor unit	2.84 3.56 - - - - 2.1 6.4 7.7 750 1660 2210 7.6 7.3 2.73 4.77 - - - - 2.1 7.5 8.5 750 1990 2520 9.1 8.7 2.51 6.29 - - - - 2.1 8.8 10.0 750 2430 3220 11.2 10.7							ard curre	ent (A'						
	combination		Roo	m heating	capacity	(kW)		Tota	al capacity	(kW)	B.O.L.	04	M	0001/	0001/	040
	combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	win.	Standard	wax.	220V	230V	240
	20		_	_	_	_	_		3.0	3.6	700	1220		5.6	5.4	5.1
	25		_	_	_	_	_	1.5		4.1	700	1265	1540	5.8	5.6	5.3
1	35		_	_			_									6.9
room	50		_	_	_	_	_				700	2120				8.9
	60		_	_	_	_	_				700	2500				10
	71			_	_	_	_		8.0	8.1	700	3020			13.3	12
	20 + 20	3.00	3.00	_	_	_	_	2.1	6.0	7.2	750	1540	1860	7.1	6.8	6.
	20 + 25	2.84	3.56	_	_	_	_	2.1	6.4	7.7	750	1660	2210	7.6	7.3	7.
	20 + 35	2.73	4.77	_	_	_	_	2.1	7.5	8.5	750	1990	2520	9.1	8.7	8.
	20 + 50	2.51	6.29	_	_	_	_	2.1	8.8	10.0	750	2430	3220	11.2	10.7	10
	20 + 60	2.45	7.35	_	_	_	_	2.1	9.8	11.0	750	2840	3620	13.0	12.5	12
	20 + 71	2.42	8.58	_	_	_	_	2.1	11.0	11.6	750	2840	3620	13.0	12.5	12
	25 + 25	3.40	3.40	_	_	_	_	2.1	6.8	8.2	750	1770	2420	8.1	7.8	7.
	25 + 35	3.29	4.61	_	_	_	_	2.1	7.9	9.0	750	2140	2820	9.8	9.4	9.
	25 + 50	3.07	6.13	_	_	_	_	2.1	9.2	10.5	750	2630	3610	12.1	11.6	11
2	25 + 60	3.00	7.20	_	_	_	_	2.1	10.2	11.5	750	3040	3790	14.0	13.4	12
room	25 + 71	2.97	8.43	_	_	_	_	2.1	11.4	12.1	750	3440	4250	15.8	15.1	14
	35 + 35	4.50	4.50	_	_	_	_	2.1	9.0	9.8	750	2520	3210	11.6	11.1	10
	35 + 50	4.24	6.06	_	_	_	_	2.1	10.3	11.3	750	3040	3710	14.0	13.4	12
	35 + 60	4.16	7.14	_	_	_	_	2.1	11.3	12.3	750	3420	4320	15.7	15.0	14
	35 + 71	3.96	8.04		_	_	_	2.1	12.0	12.9	750	4030	4690	18.5	17.7	17
	50 + 50	5.80	5.80	_	_	_	_	2.1	11.6	12.8	750	3660	4620	16.8	16.1	15
-	50 + 60	5.45	6.55	_	_	_	_	2.1	12.0	13.3	750	4030	4920	18.5	17.7	17
)	50 + 71	4.96	7.04	_	_	_	_	2.1	12.0	13.3	750	4030	4920	18.5	17.7	17
	60 + 60	6.00	6.00	_	_	_	_	2.1	12.0	13.3	750	4030	4920	18.5	17.7	17
	60 + 71	5.50	6.50	_	_	_	_	2.1	12.0	13.3	750	4030	4920	18.5	17.7	17
	71 + 71	6.00	6.00	_	_	_	_	2.1	12.0	13.3	750	4030	4920	18.5	17.7	17
	20 + 20 + 20	3.00	3.00	3.00	_	_		3.2	9.0	10.9	780	2270	3350	10.4	10.0	9
	20 + 20 + 25	2.89	2.89	3.62			_	3.2	9.4	11.4	780	2400	3550	11.0	10.5	10
	20 + 20 + 35	2.80	2.80	4.90		_	_	3.2	10.5	12.2	780	2760	3820	12.7	12.1	11
	20 + 20 + 50	2.62	2.62	6.56				3.2	11.8	13.3	780	3270	4290	15.0	14.4	13
	20 + 20 + 60	2.40	2.40	7.20	_	_	_	3.2	12.0	13.3	780	3420	4290	15.7	15.0	14
	20 + 20 + 71	2.16	2.16	7.68	_	_	_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14
	20 + 25 + 25	2.80	3.50	3.50			_	3.2	9.8	11.9	780	2560	3720	11.8	11.2	10
	20 + 25 + 35	2.73	3.41	4.77				3.2	10.9	12.7	780	2970	3990	13.6	13.0	12
١,	20 + 25 + 50	2.53	3.16	6.32			_	3.2	12.0	13.3	780	3420	4290	15.7	15.0	14
		2.29	2.86	6.86				3.2	12.0	13.3	780	3420	4290	15.7	15.0	14
1.00	20 + 25 + 71	2.29	2.59	7.34	_		_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14
3 room	20 + 35 + 35	2.67	4.67	4.67			_	3.2	12.0	13.3	780		4290	15.7	15.0	14
	20 + 35 + 35	2.07	4.00	5.71			_	3.2	12.0	13.3	780	3420 3420	4290	15.7	15.0	14
	20 + 35 + 50	2.29	3.65					3.2	12.0			3420				_
				6.26			_			13.3	780		4290	15.7	15.0	14
	20 + 35 + 71	1.90	3.33	6.76	_	_	_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14
	20 + 50 + 50	2.00	5.00	5.00				3.2	12.0	13.3	780	3410	4290	15.7	15.0	14
	20 + 50 + 60	1.85	4.62	5.54			_	3.2	12.0	13.3	780	3400	4290	15.6	14.9	14
	20 + 50 + 71	1.70	4.26	6.04				4.2	12.0	13.3	780	3390	4290	15.6	14.9	14

	Indoo: ····!t				Heatin	g capacity	y (kW)				Power	consump	tion (W)	Stand	ard curr	ent (A)
	Indoor unit combination	A room	Roo B room	m heating C room	capacity D room	(kW) E room	F room	Tota Min.	Standard	(kW) Max.	Min.	Standard	Max.	220V	230V	240V
	20 + 60 + 60	1.71	5.14	5.14	—		— —	5.2	12.0	13.3	780	3390	4290	15.6	14.9	14.3
	20 + 60 + 71	1.59	4.77	5.64	_	_	_	6.2	12.0	13.3	780	3390	4290	15.6	14.9	14.3
	25 + 25 + 25 25 + 25 + 35	3.40	3.40	3.40 4.65				3.2	10.2	12.4 13.2	780 780	2760 3170	3880 4120	12.7 14.6	12.1 13.9	11.6
	25 + 25 + 50	3.00	3.00	6.00	_	_	_	3.2	12.0	13.3	780	3420	4290	15.7	15.0	14.4
	25 + 25 + 60	2.73	2.73	6.55	_	_	_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14.4
	25 + 25 + 71 25 + 35 + 35	2.48 3.16	2.48 4.42	7.04 4.42	_	_	_	3.2	12.0 12.0	13.3 13.3	780 780	3410 3420	4290 4290	15.7 15.7	15.0 15.0	14.4
	25 + 35 + 50	2.73	3.82	5.45	_		_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14.4
	25 + 35 + 60	2.50	3.50	6.00	_	_	_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14.4
	25 + 35 + 71	2.29	3.21 4.80	6.50				4.2	12.0	13.3	780	3400	4290	15.6	14.9	14.3
3	25 + 50 + 50 25 + 50 + 60	2.40	4.44	4.80 5.33			_	3.2	12.0 12.0	13.3 13.3	780 780	3410 3400	4290 4290	15.7 15.6	15.0 14.9	14.4
roo		2.05	4.11	5.84	_	_	_	3.2	12.0	13.3	780	3390	4290	15.6	14.9	14.3
	25 + 60 + 60	2.07	4.97	4.97	_	_	_	3.2	12.0	13.3	780	3390	4290	15.6	14.9	14.3
	25 + 60 + 71 35 + 35 + 35	1.92 4.00	4.62	5.46 4.00	_		_	3.2	12.0 12.0	13.3 13.3	780 780	3390 3420	4290 4290	15.6 15.7	14.9 15.0	14.3
	35 + 35 + 50	3.50	3.50	5.00	_	_	_	3.2	12.0	13.3	780	3410	4290	15.7	15.0	14.4
	35 + 35 + 60	3.23	3.23	5.54				3.2	12.0	13.3	780	3400	4290	15.6	14.9	14.3
					_		_	3.2	12.0 12.0	13.3 13.3	780 780	3390 3400	4290 4290	15.6 15.6	14.9 14.9	14.3
	35 + 50 + 60	2.90	4.14	4.97	_	_	_	3.2	12.0	13.3	780	3390	4290	15.6	14.9	14.3
	35 + 50 + 71	2.69	3.85	5.46	_	_	_	3.2	12.0	13.3	780	3390	4290	15.6	14.9	14.3
	35 + 60 + 60 50 + 50 + 50			4.65	_	_	_	3.2	12.0 12.0	13.3 13.3	780	3390	4290 4290	15.6 15.6	14.9 14.9	14.3
	50 + 50 + 60	3.75	3.75	4.00	_	_	_	3.2	12.0	13.3	780 780	3390 3380	4290	15.5	14.9	14.3
	20 + 20 + 20 + 20	3.00	3.00	3.00	3.00	_	_	3.6	12.0	13.3	950	3270	3920	14.9	14.2	13.6
	20 + 20 + 20 + 25	2.82	2.82	2.82	3.53	_	_	3.6	12.0	13.3	950	3270	3920	14.9	14.2	13.6
					4.42 5.45	_	_	3.6	12.0 12.0	13.3 13.3	950 950	3270 3260	3920 3920	14.9	14.2 14.2	13.6 13.6
	20 + 20 + 20 + 60	2.00	2.00	2.00	6.00	_	_	3.6	12.0	13.3	950	3250	3920	14.8	14.1	13.6
	20 + 20 + 20 + 71	1.83	1.83	1.83	6.50	_	_	3.6	12.0	13.3	950	3250	3920	14.6	14.0	13.4
					3.33 4.20	_	_	3.6	12.0 12.0	13.3	950 950	3270 3260	3920 3920	14.9 14.8	14.2 14.2	13.6
	20 + 20 + 25 + 50	2.09	2.09	2.61	5.22	_	_	3.6	12.0	13.3	950	3260	3920	14.8	14.2	13.6
	20 + 20 + 25 + 60	1.92	1.92	2.40	5.76	_	_	3.6	12.0	13.3	950	3250	3920	14.8	14.1	13.6
					6.26 3.82	_	_	3.6	12.0 12.0	13.3	950 950	3250	3920 3920	14.8	14.1 14.2	13.6
		1.92	1.92	3.36	4.80	_	_	3.6	12.0	13.3	950	3260 3250	3920	14.8	14.1	13.6
	20 + 20 + 35 + 60	1.78	1.78	3.11	5.33	_	_	3.6	12.0	13.3	950	3250	3920	14.8	14.1	13.6
	20 + 20 + 35 + 71				5.84	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
					4.29 4.80			3.6	12.0 12.0	13.3	950 950	3240 3240	3920 3920	14.7	14.1	13.5
o u	20 + 20 + 60 + 60	1.50	1.50	4.50	4.50	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
rat	20 + 25 + 25 + 25	2.53	3.16	3.16	3.16	_	_	3.6	12.0	13.3	950	3270	3920	14.9	14.2	13.6
odc					4.00 5.00	_	_	3.6	12.0 12.0	13.3	950 950	3260	3920 3920	14.8	14.2 14.1	13.6
g g					5.54	_	_	3.6	12.0	13.3	950	3250 3250	3920	14.8	14.1	13.6
ati	20 + 25 + 25 + 71	1.70	2.13	2.13	6.04	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
					3.65 4.62			3.6	12.0 12.0	13.3 13.3	950	3260	3920 3920	14.8	14.2 14.1	13.6
		1.71	2.14		5.14	_	_	3.6	12.0	13.3	950 950	3250 3240	3920	14.7	14.1	13.6 13.5
	20 + 25 + 35 + 71	1.59	1.99	2.78	5.64	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
					4.14	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
					4.65 3.36		_	3.6	12.0 12.0	13.3	950 950	3240 3250	3920 3920	14.7	14.1	13.5
	20 + 35 + 35 + 50	1.71	3.00	3.00	4.29	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
	20 + 35 + 35 + 60	1.60	2.80	2.80	4.80	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
					3.87	_	_	3.6	12.0 12.0	13.3 13.3	950 950	3240 3260	3920 3920	14.7 14.8	14.1 14.2	13.5
	25 + 25 + 25 + 35	2.73	2.73	2.73	3.82	_	_	3.6	12.0	13.3	950	3260	3920	14.8	14.2	13.6
	25 + 25 + 25 + 50	2.40	2.40	2.40	4.80	_	_	3.6	12.0	13.3	950	3250	3920	14.8	14.1	13.6
					5.33 5.84			3.6	12.0 12.0	13.3	950 950	3250 3240	3920 3920	14.8	14.1 14.1	13.6 13.5
	25 + 25 + 35 + 35	2.50	2.50	3.50	3.50	_	_	3.6	12.0	13.3	950	3250	3920	14.8	14.1	13.6
	25 + 25 + 35 + 50	2.22	2.22	3.11	4.44	_	_	3.6	12.0	13.3	950	3250	3920	14.8	14.1	13.6
					4.97 5.46	_	_	3.6	12.0 12.0	13.3	950 950	3240 3240	3920 3920	14.7	14.1 14.1	13.5 13.5
	25 + 25 + 50 + 50	2.00	2.00	4.00	4.00	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
	25 + 25 + 50 + 60	1.88	1.88	3.75	4.50	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
				3.23	3.23 4.14		_	3.6	12.0 12.0	13.3	950	3250	3920	14.8	14.1	13.6
	25 + 35 + 35 + 50 25 + 35 + 35 + 60	1.94	2.90	2.90	4.14	_	_	3.6	12.0	13.3 13.3	950 950	3240 3240	3920 3920	14.7	14.1	13.5 13.5
	25 + 35 + 50 + 50	1.88	2.63	3.75	3.75	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
	35 + 35 + 35 + 35	3.00	3.00	3.00	3.00	_	_	3.6	12.0	13.3	950	3240	3920	14.7	14.1	13.5
					3.87 2.40	2.40	_	3.6 4.0	12.0 12.0	13.3 13.3	950 1050	3240 3220	3920 3620	14.7	14.1 14.0	13.5
	20 + 20 + 20 + 20 + 25	2.29	2.29	2.29	2.29	2.86	_	4.0	12.0	13.3	1050	3220	3620	14.7	14.0	13.4
			2.09	2.09	2.09	3.65		4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4
					1.85 1.71	4.62 5.14	_	4.0	12.0 12.0	13.3 13.3	1050 1050	3200 3200	3620 3620	14.6 14.6	13.9 13.9	13.3
	20 + 20 + 20 + 20 + 71	1.71	1.71	1.71	1.71	5.64	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
	20 + 20 + 20 + 25 + 25	2.18	2.18	2.18	2.73	2.73	_	4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4
5	20 + 20 + 20 + 25 + 50		2.00	2.00	2.50	3.50	_	4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4
rooi					2.22	4.44 4.97	_	4.0	12.0 12.0	13.3	1050 1050	3200 3200	3620 3620	14.6 14.6	13.9 13.9	13.3
Section Sect	1.54	1.92	5.46	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3			
			1.85	1.85	3.23	3.23	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
					2.90	4.14 4.65	_	4.0	12.0 12.0	13.3 13.3	1050	3200 3190	3620 3620	14.6 14.5	13.9	13.3
				1.55	3.75	3.75	_	4.0	12.0	13.3	1050 1050	3190	3620	14.5	13.9 13.9	13.3
	20 + 20 + 25 + 25 + 25	2.09	2.09	2.61	2.61	2.61	_	4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4
		1 102	1 1 92	2 40	2.40	3.36	_	4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4

		Indoor unit				Heatin	g capacity	/ (kW)				Power	consump	tion (W)	Standa	ard curre	nt (A)
		combination		Roo	m heating	capacity ((kW)		Tota	al capacity	(kW)	Min.	Standard	Max.	220V	230V	240V
	,	Combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	IVIII.	Standard	wax.	220V	2301	2400
		20 + 20 + 25 + 25 + 50	1.71	1.71	2.14	2.14	4.29	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
		20 + 20 + 25 + 25 + 60	1.60	1.60	2.00	2.00	4.80	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		20 + 20 + 25 + 35 + 35	1.78	1.78	2.22	3.11	3.11	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
		20 + 20 + 25 + 35 + 50	1.60	1.60	2.00	2.80	4.00	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		20 + 20 + 25 + 35 + 60	1.50	1.50	1.88	2.63	4.50	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		20 + 20 + 35 + 35 + 35	1.66	1.66	2.90	2.90	2.90	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
		20 + 20 + 35 + 35 + 50	1.50	1.50	2.63	2.63	3.75	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
_		20 + 25 + 25 + 25 + 25	2.00	2.50	2.50	2.50	2.50	_	4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4
operation		20 + 25 + 25 + 25 + 35	1.85	2.31	2.31	2.31	3.23	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
29		20 + 25 + 25 + 25 + 50	1.66	2.07	2.07	2.07	4.14	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
ğ	5	20 + 25 + 25 + 25 + 60	1.55	1.94	1.94	1.94	4.65	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
	room	20 + 25 + 25 + 35 + 35	1.71	2.14	2.14	3.00	3.00	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
Heating		20 + 25 + 25 + 35 + 50	1.55	1.94	1.94	2.71	3.87	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
ea		20 + 25 + 35 + 35 + 35	1.60	2.00	2.80	2.80	2.80	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
Ĭ		20 + 35 + 35 + 35 + 35	1.50	2.63	2.63	2.63	2.63	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		25 + 25 + 25 + 25 + 25	2.40	2.40	2.40	2.40	2.40	_	4.0	12.0	13.3	1050	3210	3620	14.6	14.0	13.4
		25 + 25 + 25 + 25 + 35	2.22	2.22	2.22	2.22	3.11	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
		25 + 25 + 25 + 25 + 50	2.00	2.00	2.00	2.00	4.00	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		25 + 25 + 25 + 25 + 60	1.88	1.88	1.88	1.88	4.50	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		25 + 25 + 25 + 35 + 35	2.07	2.07	2.07	2.90	2.90	_	4.0	12.0	13.3	1050	3200	3620	14.6	13.9	13.3
		25 + 25 + 25 + 35 + 50	1.88	1.88	1.88	2.63	3.75	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3
		25 + 25 + 35 + 35 + 35	1.94	1.94	2.71	2.71	2.71	_	4.0	12.0	13.3	1050	3190	3620	14.5	13.9	13.3

					Coolin	a conocit	, (IAM)				Dawe		Alon (MA)	04	and an	
	Indoor unit		Roo	m cooling		g capacity	y (KW)	Tots	al capacity	(kW)	Power	consump	tion (W)	Stand	ard curre	ent (/
(combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	24
	20	2.0	_	_	_	_	_	1.8	2.0	2.7	650	780	1100	3.6	3.4	3
	25	2.5	_	_	_	_	_	1.8	2.5	3.2	650	1000	1350	4.6	4.4	4
1	35	3.5	_		_		_	1.8	3.5	3.7	650	1500	1600	6.9	6.6	6
room	50	5.0	_	_	_	_	_	1.8	5.0	5.8	650	2150	2500	9.9	9.4	9
	60 71	6.0 7.1	_		_		_	1.8	6.0 7.1	6.7 7.2	650 650	2720 3250	3000 3080	12.5 14.9	11.9	11
	20 + 20	2.00	2.00					3.0	4.0	5.4	740	960	1460	4.4	14.3 4.2	4
	20 + 25	2.00	2.50	_	_	_	_	3.0	4.5	5.9	740	1100	1820	5.1	4.8	4
	20 + 35	2.00	3.50	_	_	_	_	3.0	5.5	6.4	740	1500	2020	6.9	6.6	6
	20 + 50	2.00	5.00	_	_	_	_	3.0	7.0	8.5	740	2290	2820	10.5	10.1	9
	20 + 60	2.00	6.00					3.0	8.0	9.4	740	2660	3360	12.2	11.7	1
	20 + 71	2.00	7.10	_	_	_	_	3.0	9.1	9.9	740	3100	3780	14.1	13.5	1
	25 + 25 25 + 35	2.50 2.50	2.50 3.50		_	_	_	3.0	5.0 6.0	6.8	740 740	1420 1810	2200 2320	6.5	6.2	6
	25 + 50	2.50	5.00					3.0	7.5	9.0	740	2470	3220	8.3 11.3	7.9 10.8	1
	25 + 60	2.50	6.00	_	_	_	_	3.0	8.5	9.4	740	2810	3360	12.9	12.3	1
2 room	25 + 71	2.53	7.17	_	_	_	_	3.0	9.7	10.4	740	3350	4020	15.4	14.7	1
	35 + 35	3.50	3.50	_	_	_	_	3.0	7.0	7.4	740	2290	2820	10.5	10.1	9
	35 + 50	3.50	5.00					3.0	8.5	9.5	740	2810	3620	12.9	12.3	1
	35 + 60 25 + 74	3.50 3.30	6.00	_	_	_	_	3.0	9.5	10.4	740	3280	3990	15.1	14.4	1
	35 + 71 50 + 50	5.00	6.70 5.00	_			_	3.0	10.0 10.0	10.9 11.6	740 740	3480 3480	4250 4350	15.8 16.0	15.1 15.3	1
	50 + 60	4.55	5.45					3.0	10.0	11.8	740	3480	4410	16.0	15.3	1
	50 + 71	4.13	5.87	_	_	_	_	3.0	10.0	11.8	740	3470	4410	15.8	15.1	1
	60 + 60	5.00	5.00	_	_	_	_	3.0	10.0	11.8	740	3470	4410	15.9	15.2	1
	60 + 71	4.58	5.42	_	_	_	_	3.0	10.0	11.8	740	3470	4410	15.8	15.1	1
	71 + 71	5.00	5.00					3.0	10.0	11.8	740	3460	4410	15.6	14.9	1
	20 + 20 + 20 20 + 20 + 25	2.00	2.00	2.00	_		_	3.7	6.0 6.5	8.1	880 880	1530	2490	7.0	6.7	
	20 + 20 + 25	2.00	2.00	3.50				3.7	7.5	9.1	880	1730 2080	2700 3120	7.9 9.6	7.6 9.1	1
	20 + 20 + 50	2.00	2.00	5.00				3.7	9.0	11.2	880	2730	4000	12.5	12.0	1
	20 + 20 + 60	2.00	2.00	6.00	_	_	_	3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	20 + 20 + 71	1.80	1.80	6.40	_	_	_	3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	20 + 25 + 25	2.00	2.50	2.50	_	_	_	3.7	7.0	9.1	880	1940	3210	8.9	8.5	1
	20 + 25 + 35	2.00	2.50	3.50				3.7	8.0	9.6	880	2440	3630	11.2	10.7	1
	20 + 25 + 50 20 + 25 + 60	2.00 1.90	2.50	5.00 5.71			_	3.7	9.5 10.0	11.5 11.8	880 880	3130 3280	4120 4250	14.4 15.1	13.7	1
	20 + 25 + 71	1.72	2.16	6.12				3.7	10.0	11.8	880	3280	4250	15.1	14.4 14.4	1
	20 + 35 + 35	2.00	3.50	3.50	_	_	_	3.7	9.0	10.1	880	2920	3640	13.4	12.8	1
	20 + 35 + 50	1.90	3.33	4.76	_	_	_	3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	20 + 35 + 60	1.74	3.04	5.22	_	_	_	3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	20 + 35 + 71	1.59	2.78	5.63	_	_	_	4.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	20 + 50 + 50	1.67	4.17	4.17				3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	20 + 50 + 60 20 + 50 + 71	1.54 1.42	3.85 3.55	4.62 5.04				3.7	10.0 10.0	11.8 11.8	880 880	3270 3260	4250 4250	15.0	14.4	1
	20 + 60 + 60	1.42	4.29	4.29				3.7	10.0	11.8	880	3260	4250	15.0 15.0	14.3 14.3	1
3	20 + 60 + 71	1.32	3.97	4.70	_	_	_	3.7	10.0	11.8	880	3260	4250	15.0	14.3	1
room	25 + 25 + 25	2.50	2.50	2.50	_	_	_	3.7	7.5	9.4	880	2130	3340	9.8	9.4	
	25 + 25 + 35	2.50	2.50	3.50	_	_	_	3.7	8.5	9.9	880	2650	3540	12.2	11.6	1
	25 + 25 + 50	2.50	2.50	5.00	_	_	_	3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	25 + 25 + 60	2.27	2.27	5.45		_		3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	25 + 25 + 71 25 + 35 + 35	2.07	2.07 3.50	5.87 3.50				3.7	10.0 9.5	11.8 10.4	880 880	3270 3130	4250 3950	15.0 14.4	14.4 13.7	1
	25 + 35 + 50	2.27	3.18	4.55				3.7	10.0	11.8	880	3280	4250	15.1	14.4	1
	25 + 35 + 60	2.08	2.92	5.00	_		_	3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	25 + 35 + 71	1.91	2.67	5.42	_	_	_	3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	25 + 50 + 50	2.00	4.00	4.00	_	_	_	3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	25 + 50 + 60	1.85	3.70	4.44	_	_	_	3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	25 + 50 + 71	1.71	3.42	4.86				3.7	10.0	11.8	880	3260	4250	21.4	20.5	1
	25 + 60 + 60 25 + 60 + 71	1.72 1.60	4.14 3.85	4.14 4.55	_		_	3.7	10.0	11.8	880 880	3260 3260	4250	21.4	20.5	1
	25 + 60 + 71 35 + 35 + 35	3.33	3.85	3.33			_	3.7	10.0	10.9	880	3280	4250 4120	21.4 15.1	20.5 14.4	1
	35 + 35 + 50	2.92	2.92	4.17				3.7	10.0	11.8	880	3270	4250	15.1	14.4	1
	35 + 35 + 60	2.69	2.69	4.62	_	_	_	3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	35 + 35 + 71	2.48	2.48	5.04	_	_	_	3.7	10.0	11.8	880	3260	4250	14.8	14.2	1
	35 + 50 + 50	2.59	3.70	3.70	_	_	_	3.7	10.0	11.8	880	3270	4250	15.0	14.4	1
	35 + 50 + 60	2.41	3.45	4.14	_	_	–	3.7	10.0	11.8	880	3260	4250	15.0	14.3	1

	Indoor unit					g capacity	y (kW)	T	.l	(1-)4()	Power	consump	tion (W)	Stand	ard curr	ent (A
	combination	A room	Roo B room	m cooling C room	D room	(kW) E room	F room	Min.	al capacity Standard	(kW) Max.	Min.	Standard	Max.	220V	230V	240
	35 + 50 + 71	2.24	3.21	4.55			—	3.7	10.0	11.8	880	3260	4250	15.0	14.3	13.
3	35 + 60 + 60	2.26	3.87	3.87	_	_	_	3.7	10.0	11.8	880	3260	4250	15.0	14.3	13.
room	50 + 50 + 50 50 + 50 + 60	3.33 3.13	3.33	3.33 3.75	_	_	_	3.7	10.0	11.8	880 880	3260 3260	4250 4250	15.0 15.0	14.3 14.3	13.
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	_	_	4.4	8.0	10.8	1100	2110	3680	9.6	9.2	8.8
	20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	_	_	4.4	8.5	11.1	1100	2390	3890	10.9	10.4	10.
	20 + 20 + 20 + 35	2.00	2.00	2.00	3.50		_	4.4	9.5	11.6	1110	2900	3990	13.2	12.6	12.
	20 + 20 + 20 + 50 20 + 20 + 20 + 60	1.82 1.67	1.82 1.67	1.82	4.55 5.00	_	_	4.4	10.0	11.8 11.8	1100	3210 3210	4050 4050	14.6 14.6	14.0 14.0	13.
	20 + 20 + 20 + 71	1.53	1.53	1.53	5.42		_	4.4	10.0	11.8	1100	3200	4050	14.4	13.8	13.
	20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	_	_	4.4	9.0	11.6	1100	2600	3990	11.8	11.3	10.
	20 + 20 + 25 + 35	2.00	2.00	2.50	3.50	_	_	4.4	10.0	11.8	1100	3220	4050	14.7	14.0	13.
	20 + 20 + 25 + 50 20 + 20 + 25 + 60	1.74	1.74	2.17	4.35			4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13.
	20 + 20 + 25 + 60	1.60 1.47	1.60 1.47	2.00 1.84	4.80 5.22	_	_	4.4	10.0	11.8 11.8	1100	3210 3200	4050 4050	14.6 14.6	14.0 13.9	13.
	20 + 20 + 35 + 35	1.82	1.82	3.18	3.18	_	_	4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13.
	20 + 20 + 35 + 50	1.60	1.60	2.80	4.00	_	_	4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13.
	20 + 20 + 35 + 60	1.48	1.48	2.59	4.44	_	_	4.4	10.0	11.8	1100	3200	4050	14.6	13.9	13.
	20 + 20 + 35 + 71 20 + 20 + 50 + 50	1.37 1.43	1.37	2.40 3.57	4.86 3.57	_	_	4.4	10.0	11.8 11.8	1100	3190 3190	4050	14.5 14.5	13.9 13.9	13.
	20 + 20 + 50 + 60	1.43	1.43	3.33	4.00		_	4.4	10.0	11.8	1100	3190	4050 4050	14.5	13.9	13.
	20 + 20 + 60 + 60	1.25	1.25	3.75	3.75	_	_	4.4	10.0	11.8	1100	3180	4050	14.5	13.8	13.
	20 + 25 + 25 + 25	2.00	2.50	2.50	2.50	_	_	4.4	9.5	11.8	1100	2900	4050	13.2	12.6	12.
	20 + 25 + 25 + 35	1.90	2.38	2.38	3.33	_	_	4.4	10.0	11.8	1100	3220	4050	14.7	14.0	13.
	20 + 25 + 25 + 50	1.67 1.54	2.08 1.92	2.08 1.92	4.17 4.62	_	_	4.4	10.0	11.8 11.8	1100	3210 3200	4050 4050	14.6 14.6	14.0 13.9	13.
	20 + 25 + 25 + 60	1.54	1.92	1.92	4.62	_	_	4.4	10.0	11.8	1100	3200	4050	14.5	13.9	13.
	20 + 25 + 35 + 35	1.74	2.17	3.04	3.04	_	_	4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13.
4	20 + 25 + 35 + 50	1.54	1.92	2.69	3.85		_	4.4	10.0	11.8	1100	3200	4050	14.6	13.9	13.
room	20 + 25 + 35 + 60	1.43	1.79	2.50	4.29	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	20 + 25 + 35 + 71	1.32	1.66	2.32 3.45	4.70 3.45	_	_	4.4	10.0	11.8	1100	3190 3190	4050 4050	14.5 14.5	13.9 13.9	13.
	20 + 25 + 50 + 60	1.29	1.61	3.23	3.43		_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	20 + 35 + 35 + 35	1.60	2.80	2.80	2.80	_	_	4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13
	20 + 35 + 35 + 50	1.43	2.50	2.50	3.57	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	20 + 35 + 35 + 60 20 + 35 + 50 + 50	1.33 1.29	2.33	2.33	4.00 3.23	_	_	4.4	10.0	11.8 11.8	1100	3190	4050	14.5 14.5	13.9	13.
	25 + 25 + 25 + 25	2.50	2.20	3.23 2.50	2.50			4.4	10.0	11.8	1100	3190 3220	4050 4050	14.5	13.9 14.0	13.
	25 + 25 + 25 + 35	2.27	2.27	2.27	3.18	_	_	4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13
	25 + 25 + 25 + 50	2.00	2.00	2.00	4.00	_	_	4.4	10.0	11.8	1100	3210	4050	14.6	14.0	13
	25 + 25 + 25 + 60	1.85	1.85	1.85	4.44		_	4.4	10.0	11.8	1100	3200	4050	14.6	13.9	13
	25 + 25 + 25 + 71 25 + 25 + 35 + 35	1.71 2.08	1.71 2.08	1.71 2.92	4.86 2.92	_	_	4.4	10.0	11.8 11.8	1100	3190	4050 4050	14.5 14.6	13.9 14.0	13
	25 + 25 + 35 + 50	1.85	1.85	2.59	3.70		_	4.4	10.0	11.8	1100	3210 3200	4050	14.6	13.9	13
	25 + 25 + 35 + 60	1.72	1.72	2.41	4.14	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	25 + 25 + 35 + 71	1.60	1.60	2.24	4.55	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	25 + 25 + 50 + 50	1.67	1.67	3.33	3.33			4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	25 + 25 + 50 + 60 25 + 35 + 35 + 35	1.56 1.92	1.56 2.69	3.13 2.69	3.75 2.69		_	4.4	10.0	11.8	1100	3180 3200	4050 4050	14.5 14.6	13.8 13.9	13.
	25 + 35 + 35 + 50	1.72	2.41	2.41	3.45	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	25 + 35 + 35 + 60	1.61	2.26	2.26	3.87	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	25 + 35 + 50 + 50	1.56	2.19	3.13	3.13	_	_	4.4	10.0	11.8	1100	3180	4050	14.5	13.8	13.
	35 + 35 + 35 + 35 35 + 35 + 35 + 50	2.50 2.26	2.50 2.26	2.50	2.50 3.23	_	_	4.4	10.0	11.8	1100	3190	4050	14.5	13.9	13.
	20 + 20 + 20 + 20 + 20	2.00	2.20	2.26	2.00	2.00	_	4.4 5.1	10.0	11.8	1100 1210	3190 2950	4050 4030	14.5 13.4	13.9 12.8	13.
	20 + 20 + 20 + 20 + 25	1.90	1.90	1.90	1.90	2.38	_	5.1	10.0	11.8	1210	2950	4030	13.4	12.8	12
	20 + 20 + 20 + 20 + 35	1.74	1.74	1.74	1.74	3.04	_	5.1	10.0	11.8	1210	2950	4030	13.4	12.8	12
	20 + 20 + 20 + 20 + 50	1.54	1.54	1.54	1.54	3.85	_	5.1	10.0	11.8	1210	2940	4030	13.4	12.8	12
	20 + 20 + 20 + 20 + 60	1.43	1.43	1.43	1.43	4.29	_	5.1 5.1	10.0	11.8 11.8	1210 1210	2930 2930	4030 4030	13.3	12.8	12
	20 + 20 + 20 + 25 + 25	1.82	1.82	1.82	2.27	2.27		5.1	10.0	11.8	1210	2950	4030	13.4	12.8	12
	20 + 20 + 20 + 25 + 35	1.67	1.67	1.67	2.08	2.92	_	5.1	10.0	11.8	1210	2940	4030	13.4	12.8	12
	20 + 20 + 20 + 25 + 50	1.48	1.48	1.48	1.85	3.70	_	5.1	10.0	11.8	1210	2940	4030	13.4	12.8	12
	20 + 20 + 20 + 25 + 60 20 + 20 + 20 + 25 + 71	1.38 1.28	1.38	1.38 1.28	1.72 1.60	4.14 4.55	_	5.1 5.1	10.0	11.8	1210 1210	2930 2930	4030 4030	13.3	12.8 12.8	12
	20 + 20 + 20 + 25 + 71	1.54	1.54	1.54	2.69	2.69	_	5.1	10.0	11.8	1210	2930	4030	13.4	12.8	12
	20 + 20 + 20 + 35 + 50	1.38	1.38	1.38	2.41	3.45	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 20 + 20 + 35 + 60	1.29	1.29	1.29	2.26	3.87	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 20 + 20 + 50 + 50 20 + 20 + 25 + 25 + 25	1.25 1.74	1.25 1.74	1.25 2.17	3.13 2.17	3.13 2.17	_	5.1	10.0	11.8	1210 1210	2930	4030	13.3 13.4	12.8 12.8	12
	20 + 20 + 25 + 25 + 25	1.74	1.74	2.17	2.17	2.17	_	5.1 5.1	10.0	11.8	1210	2950 2940	4030 4030	13.4	12.8	12
	20 + 20 + 25 + 25 + 50	1.43	1.43	1.79	1.79	3.57	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
_	20 + 20 + 25 + 25 + 60	1.33	1.33	1.67	1.67	4.00	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
5 room	20 + 20 + 25 + 35 + 35 20 + 20 + 25 + 35 + 50	1.48	1.48	1.85	2.59	2.59	_	5.1	10.0	11.8	1210	2940	4030	13.4	12.8	12
	20 + 20 + 25 + 35 + 50	1.33 1.25	1.33	1.67 1.56	2.33	3.33 3.75	_	5.1 5.1	10.0	11.8	1210 1210	2930 2930	4030 4030	13.3	12.8 12.8	12
	20 + 20 + 35 + 35 + 35	1.38	1.38	2.41	2.19	2.41		5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 20 + 35 + 35 + 50	1.25	1.25	2.19	2.19	3.13	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 25 + 25 + 25 + 25	1.67	2.08	2.08	2.08	2.08	_	5.1	10.0	11.8	1210	2940	4030	13.4	12.8	12
	20 + 25 + 25 + 25 + 35 20 + 25 + 25 + 25 + 50	1.54 1.38	1.92 1.72	1.92 1.72	1.92 1.72	2.69 3.45	_	5.1	10.0	11.8	1210	2940	4030	13.4	12.8	12
	20 + 25 + 25 + 25 + 60	1.38	1.72	1.72	1.72	3.45	_	5.1 5.1	10.0	11.8 11.8	1210 1210	2930 2930	4030 4030	13.3	12.8 12.8	12
	20 + 25 + 25 + 35 + 35	1.43	1.79	1.79	2.50	2.50	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 25 + 25 + 35 + 50	1.29	1.61	1.61	2.26	3.23	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 25 + 35 + 35 + 35	1.33	1.67	2.33	2.33	2.33	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	20 + 35 + 35 + 35 + 35	1.25 2.00	2.19	2.19	2.19	2.19	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	25 + 25 + 25 + 25 + 25 25 + 25 + 25 + 25	1.85	2.00 1.85	2.00 1.85	2.00 1.85	2.00	_	5.1 5.1	10.0	11.8 11.8	1210 1210	2940 2940	4030 4030	13.4 13.4	12.8 12.8	12
	25 + 25 + 25 + 25 + 50	1.67	1.67	1.67	1.67	3.33	_	5.1	10.0	11.8	1210	2930	4030	13.4	12.8	12
1	25 + 25 + 25 + 25 + 60	1.56	1.56	1.56	1.56	3.75	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
			4.70		0.44	2.41	_	5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12
	25 + 25 + 25 + 35 + 35 25 + 25 + 25 + 35 + 50	1.72 1.56	1.72 1.56	1.72 1.56	2.41	3.13		5.1	10.0	11.8	1210	2930	4030	13.3	12.8	12

SCM125ZM-S Table of Indoor unit combination with all indoor unit SRK-ZSX-S type only

	Indoor unit					g capacity	y (kW)				Power	consump	tion (W)	Stand	ard curr	ent (A)
	combination	A room	Room B room		D room		F room		Standard		Min.	Standard	Max.	220V	230V	240V
	20	3.0		-		_		1.5	3.0	3.7	700	1010	1330	4.6	4.4	4.3
1	25	3.4	_	_	_	_	_	1.5	3.4	4.2	700	1150	1540	5.3	5.1	4.8
room	35	4.5						1.5	4.5	5.0	700	1540	1840			6.5
	50 60	5.8 6.8		_	_	_	_	1.5	5.8	6.5	700	2000	2410 2760			9.9
	20 + 20	3.00	3.00				_	1.5 2.1	6.8	7.5 7.4	750	1510	1460			6.4
	20 + 25	2.84	3.56	_	_	_		2.1	6.4	7.9	750	1630	2210			6.9
	20 + 35	2.73	4.77	_	_	_	_	2.1	7.5	8.7	750	1950	2520	9.0	8.6	8.2
	20 + 50	2.51	6.29	_	_	_	_	2.1	8.8	10.2	750	2380	3220	10.9	10.5	10.0
	20 + 60	2.45	7.35	_	_	_	_	2.1	9.8	11.2	750	2780	3620	12.8	12.2	11.7
	25 + 25	3.40	3.40					2.1	6.8	8.4	750	1740	2420			7.3
2	25 + 35 25 + 50	3.29 3.07	4.61 6.13	_	_	_	_	2.1	7.9 9.2	9.2	750 750	2100 2580	2820 3610			8.8 10.9
room	25 + 60	3.00	7.20				_	2.1	10.2	11.7	750	2980	3790			12.5
	35 + 35	4.50	4.50	_	_	_	_	2.1	9.0	10.0	750	2470	3210			10.4
	35 + 50	4.24	6.06	_	_	_	_	2.1	10.3	11.5	750	2980	3710	13.7	13.1	12.5
	35 + 60	4.16	7.14	_	_	_	_	2.1	11.3	12.5	750	3350	4320	15.4	14.7	14.1
	50 + 50	5.80	5.80	_	_	_	_	2.1	11.6	13.0	750	3590	4620			15.1
	50 + 60	5.73	6.87				_	2.1	12.6	14.0	750	4010	5230			16.9
-	60 + 60 20 + 20 + 20	6.75	6.75	2.00	_	_	_	2.1	9.0	14.0	750 780	4450 2230	5230 3350			18.7 9.4
	20 + 20 + 20	3.00 2.89	3.00 2.89	3.00				3.2	9.0	11.6	780	2350	3550			9.4
	20 + 20 + 35	2.80	2.80	4.90				3.2	10.5	12.4	780	2710	3820			11.4
	20 + 20 + 50	2.62	2.62	6.56	_	_	_	3.2	11.8	13.9	780	3210	4290			13.5
	20 + 20 + 60	2.56	2.56	7.68	_	_	_	3.2	12.8	14.0	780	3620	4350	16.6	15.9	15.2
	20 + 25 + 25	2.80	3.50	3.50	_	_	_	3.2	9.8	12.1	780	2510	3720	11.5	11.0	10.6
	20 + 25 + 35	2.73	3.41	4.77			_	3.2	10.9	12.9	780	2910	3990	13.4	12.8	12.2
	20 + 25 + 50	2.57	3.21	6.42			_	3.2	12.2	14.0	780	3410	4350			14.4
	20 + 25 + 60 20 + 35 + 35	2.51 2.67	3.14 4.67	7.54		_	_	3.2	13.2 12.0	14.0	780 780	3910 3390	4350 4220			16.5 14.3
	20 + 35 + 50	2.53	4.67	4.67 6.33				3.2	13.3	14.0	780	3900	4350			16.4
	20 + 35 + 60	2.35	4.11	7.04		_	_	3.2	13.5	14.0	780	4050	4350		17.1	17.0
	20 + 50 + 50	2.25	5.63	5.63	_	_	_	3.2	13.5	14.0	780	4050	4350	18.6	17.8	17.0
	20 + 50 + 60	2.08	5.19	6.23	_	_	_	3.2	13.5	14.0	780	4050	4350	18.6	17.8	17.0
	20 + 60 + 60	1.93	5.79	5.79	_	_	_	3.2	13.5	14.0	780	4050	4350	18.6	17.8	17.0
	25 + 25 + 25	3.40	3.40	3.40	_	_	_	3.2	10.2	12.6	780	2710	3880			11.4
3	25 + 25 + 35	3.32	3.32	4.65			_	3.2	11.3	13.4 14.0	780 780	3110	4120			13.1
room	25 + 25 + 50 25 + 25 + 60	3.15 3.07	3.15 3.07	6.30 7.36			_	3.2	12.6 13.5	14.0	780	3620 4050	4350 4350			15.2 17.0
	25 + 35 + 35	3.26	4.57	4.57				3.2	12.4	14.0	780	3710	4350			15.6
	25 + 35 + 50	3.07	4.30	6.14	_	_	_	3.2	13.5	14.0	780	4060	4350	18.6	17.8	17.1
	25 + 35 + 60	2.81	3.94	6.75	_	_	_	3.2	13.5	14.0	780	4060	4350	18.6	17.8	17.1
.	25 + 50 + 50	2.70	5.40	5.40			_	3.2	13.5	14.0	780	4050	4350	18.6		17.0
	25 + 50 + 60	2.50	5.00	6.00	_	_	_	3.2	13.5	14.0	780	4050	4350			17.0
	25 + 60 + 60 35 + 35 + 35	2.33	5.59	5.59				3.2	13.5 13.5	14.0 14.0	780 780	4050 4060	4350 4350			17.0 17.1
<u> </u>	35 + 35 + 50	4.50 3.94	4.50 3.94	4.50 5.63				3.2	13.5	14.0	780	4060	4350			17.1
	35 + 35 + 60	3.63	3.63	6.23	_	_	_	3.2	13.5	14.0	780	4050	4350			17.0
	35 + 50 + 50	3.50	5.00	5.00	_	_	_	3.2	13.5	14.0	780	4050	4350	18.6	17.8	17.0
	35 + 50 + 60	3.26	4.66	5.59	_	_	_	3.2	13.5	14.0	780	4050	4350	18.6	17.8	17.0
	35 + 60 + 60	3.05	5.23	5.23	_	_	_	3.2	13.5	14.0	780	4050	4350			17.0
	50 + 50 + 50	4.50	4.50	4.50	_	_	_	3.2	13.5	14.0	780 780	4040	4350		7.1 6.8 9.2 8.8 10.8 10.4 6.9 6.6 7.5 7.2 9.0 8.6 10.9 10.5 12.8 12.2 8.0 7.6 9.6 9.2 11.8 11.3 10.8 13.7 13.1 11.3 10.8 13.7 13.1 15.4 14.7 16.5 15.8 18.4 17.6 10.2 9.8 10.8 10.3 12.4 11.9 14.7 14.1 16.6 15.9 11.5 11.0 13.4 12.8 15.7 15.0 11.5 11.0 13.4 12.8 15.7 15.0 17.9 17.1 18.6 17.8	17.0
	50 + 50 + 60 50 + 60 + 60	4.22 3.97	4.22 4.76	5.06 4.76		_	_	3.2	13.5 13.5	14.0 14.0	780	4040 4040	4350 4350			17.0
	60 + 60 + 60	4.50	4.70	4.70				3.2	13.5	14.0	780	4030	4350			17.0
	20 + 20 + 20 + 20	3.00	3.00	3.00	3.00	_	_	3.6	12.0	14.0	950	3210	3920			13.4
	20 + 20 + 20 + 25	2.92	2.92	2.92	3.65	_	_	3.6	12.4	14.0	950	3390	3920	15.4	14.8	14.1
	20 + 20 + 20 + 35	2.84	2.84	2.84	4.97	_	_	3.6	13.5	14.0	950	3700	3920			15.4
	20 + 20 + 20 + 50	2.45	2.45	2.45	6.14		_	3.6	13.5	14.0	950	3690	3920			15.4
	20 + 20 + 20 + 60	2.25	2.25	2.25	6.75	_	_	3.6	13.5	14.0	950 950	3690	3920			15.4
	20 + 20 + 25 + 25 20 + 20 + 25 + 35	2.84 2.70	2.84	3.56 3.38	3.56 4.73		_	3.6	12.8 13.5	14.0 14.0	950	3440 3700	3920 3920			15.4
	20 + 20 + 25 + 50	2.70	2.70	2.93	5.87		_	3.6	13.5	14.0	950	3690	3920			15.4
	20 + 20 + 25 + 60	2.16	2.16	2.70	6.48	_	_	3.6	13.5	14.0	950	3680	3920			15.3
	20 + 20 + 35 + 35	2.45	2.45	4.30	4.30	_	_	3.6	13.5	14.0	950	3690	3920			15.4
	20 + 20 + 35 + 50	2.16	2.16	3.78	5.40	_	_	3.6	13.5	14.0	950	3680	3920			15.3
	20 + 20 + 35 + 60	2.00	2.00	3.50	6.00		_	3.6	13.5	14.0	950	3680	3920			15.3
	20 + 20 + 50 + 50 20 + 20 + 50 + 60	1.93	1.93	4.82	4.82	_	_	3.6	13.5	14.0	950 950	3670	3920			15.3
	20 + 20 + 50 + 60	1.80 1.69	1.80 1.69	4.50 5.06	5.40 5.06		_	3.6	13.5 13.5	14.0 14.0	950	3670 3670	3920 3920			15.3 15.3
	20 + 25 + 25 + 25	2.78	3.47	3.47	3.47		_	3.6	13.2	14.0	950	3550	3920			14.8
	20 + 25 + 25 + 35	2.57	3.21	3.21	4.50	_	_	3.6	13.5	14.0	950	3700	3920			15.4
	20 + 25 + 25 + 50	2.25	2.81	2.81	5.63	_	_	3.6	13.5	14.0	950	3690	3920			15.4
4	20 + 25 + 25 + 60	2.08	2.60	2.60	6.23	_	_	3.6	13.5	14.0	950	3680	3920			15.3
room		2.35	2.93	4.11	4.11		_	3.6	13.5	14.0	950	3690	3920			15.4
	20 + 25 + 35 + 50	2.08	2.60	3.63	5.19	_	_	3.6	13.5	14.0	950	3680	3920			15.3
	20 + 25 + 35 + 60 20 + 25 + 50 + 50	1.93 1.86	2.41	3.38 4.66	5.79 4.66		_	3.6	13.5 13.5	14.0	950 950	3670 3670	3920 3920			15.3 15.3
	20 + 25 + 50 + 60	1.74	2.33	4.00	5.23			3.6	13.5	14.0	950	3670	3920			15.3
	20 + 25 + 60 + 60	1.64	2.05	4.91	4.91	_	_	3.6	13.5	14.0	950	3660	3920			15.3
	20 + 35 + 35 + 35	2.16	3.78	3.78	3.78	_	_	3.6	13.5	14.0	950	3680	3920			15.3
	20 + 35 + 35 + 50	1.93	3.38	3.38	4.82	_	_	3.6	13.5	14.0	950	3670	3920	16.7	16.0	15.3
	20 + 35 + 35 + 60	1.80	3.15	3.15	5.40	_	_	3.6	13.5	14.0	950	3670	3920			15.3
	20 + 35 + 50 + 50	1.74	3.05	4.35	4.35	_	_	3.6	13.5	14.0	950	3670	3920			15.3
	20 + 35 + 50 + 60	1.64	2.86	4.09	4.91		_	3.6	13.5	14.0	950	3660	3920			15.3
	20 + 35 + 60 + 60 20 + 50 + 50 + 50	1.54 1.59	2.70 3.97	4.63 3.97	4.63 3.97	_	_	3.6	13.5 13.5	14.0	950 950	3660 3660	3920 3920			15.3 15.3
	20 + 50 + 50 + 50	1.59	3.97	3.97	4.50		_	3.6	13.5	14.0	950	3660	3920			15.3
	20 + 50 + 60 + 60	1.42	3.55	4.26	4.26		_	3.6	13.5	14.0	950	3650	3920			15.2
	25 + 25 + 25 + 25	3.38	3.38	3.38	3.38	_	_	3.6	13.5	14.0	950	3700	3920			15.4
	25 + 25 + 25 + 35	3.07	3.07	3.07	4.30	_	_	3.6	13.5	14.0	950	3690	3920			15.4
				0.70	5.40	_	_	3.6	13.5	14.0	950	3680	3920	16.7	16.0	15.3
	25 + 25 + 25 + 50 25 + 25 + 25 + 60	2.70 2.50	2.70	2.70	6.00			3.6	13.5	14.0	950	3680	3920			15.3

		Indoor unit					g capacity	y (kW)				Power	consump	tion (W)	Stand	ard curr	ent (A)
		combination	A room	Roo B room	m heating C room	D room	(kW) E room	F room	Tota Min.	Standard	(kW) Max.	Min.	Standard	Max.	220V	230V	240V
		25 + 25 + 35 + 35	2.81	2.81	3.94	3.94		—	3.6	13.5	14.0	950	3690	3920	16.8	16.1	15.4
		25 + 25 + 35 + 50	2.50	2.50	3.50	5.00	_	_	3.6	13.5	14.0	950	3680	3920	16.7	16.0	15.3
		25 + 25 + 35 + 60 25 + 25 + 50 + 50	2.33	2.33	3.26 4.50	5.59 4.50	_	_	3.6	13.5 13.5	14.0	950 950	3670 3670	3920 3920	16.7 16.7	16.0 16.0	15.3 15.3
		25 + 25 + 50 + 60	2.11	2.11	4.22	5.06	_	_	3.6	13.5	14.0	950	3670	3920	16.7	16.0	15.3
		25 + 25 + 60 + 60	1.99	1.99	4.76	4.76	_	_	3.6	13.5	14.0	950	3660	3920	16.7	15.9	15.3
		25 + 35 + 35 + 35	2.60	3.63	3.63	3.63	_	_	3.6	13.5	14.0	950	3680	3920	16.7	16.0	15.3
		25 + 35 + 35 + 50 25 + 35 + 35 + 60	2.33	3.26 3.05	3.26 3.05	4.66 5.23	_	_	3.6	13.5 13.5	14.0	950 950	3670 3670	3920 3920	16.7 16.7	16.0 16.0	15.3 15.3
		25 + 35 + 50 + 50	2.11	2.95	4.22	4.22	_	_	3.6	13.5	14.0	950	3670	3920	16.7	16.0	15.3
	4	25 + 35 + 50 + 60	1.99	2.78	3.97	4.76	_		3.6	13.5	14.0	950	3660	3920	16.7	15.9	15.3
	room	25 + 35 + 60 + 60 25 + 50 + 50 + 50	1.88 1.93	2.63 3.86	4.50 3.86	4.50 3.86	_	_	3.6	13.5 13.5	14.0 14.0	950	3660	3920 3920	16.7 16.7	15.9	15.3
		25 + 50 + 50 + 60	1.82	3.65	3.65	4.38		_	3.6	13.5	14.0	950 950	3660 3650	3920	16.6	15.9 15.9	15.3 15.2
		25 + 50 + 60 + 60	1.73	3.46	4.15	4.15	_	_	3.6	13.5	14.0	950	3650	3920	16.6	15.9	15.2
		35 + 35 + 35 + 35	3.38	3.38	3.38	3.38	_	_	3.6	13.5	14.0	950	3670	3920	16.7	16.0	15.3
		35 + 35 + 35 + 50 35 + 35 + 35 + 60	3.05 2.86	3.05 2.86	3.05 2.86	4.35 4.91			3.6 3.6	13.5 13.5	14.0 14.0	950 950	3670 3660	3920 3920	16.7 16.7	16.0 15.9	15.3 15.3
		35 + 35 + 50 + 50	2.78	2.78	3.97	3.97	_	_	3.6	13.5	14.0	950	3660	3920	16.7	15.9	15.3
		35 + 35 + 50 + 60	2.63	2.63	3.75	4.50	_	_	3.6	13.5	14.0	950	3660	3920	16.7	15.9	15.3
		35 + 35 + 60 + 60	2.49	2.49	4.26	4.26		_	3.6	13.5	14.0	950	3650	3920	16.6	15.9	15.2
		35 + 50 + 50 + 50 35 + 50 + 50 + 60	2.55 2.42	3.65 3.46	3.65 3.46	3.65 4.15			3.6 3.6	13.5 13.5	14.0 14.0	950 950	3650 3650	3920 3920	16.6 16.6	15.9 15.9	15.2 15.2
		20 + 20 + 20 + 20 + 20	2.70	2.70	2.70	2.70	2.70	_	4.0	13.5	14.0	1050	3380	3470	15.4	14.7	14.1
		20 + 20 + 20 + 20 + 25	2.57	2.57	2.57	2.57	3.21		4.0	13.5	14.0	1050	3380	3470	15.4	14.7	14.1
		20 + 20 + 20 + 20 + 35 20 + 20 + 20 + 20 + 50	2.35	2.35	2.35	2.35	4.11 5.19	_	4.0	13.5 13.5	14.0 14.0	1050 1050	3370	3470 3470	15.3 15.3	14.7 14.6	14.1
		20 + 20 + 20 + 20 + 50	1.93	1.93	1.93	1.93	5.19		4.0	13.5	14.0	1050	3360 3360	3470	15.3	14.6	14.0
		20 + 20 + 20 + 25 + 25	2.45	2.45	2.45	3.07	3.07	_	4.0	13.5	14.0	1050	3380	3470	15.4	14.7	14.1
		20 + 20 + 20 + 25 + 35	2.25	2.25	2.25	2.81	3.94	_	4.0	13.5	14.0	1050	3370	3470	15.3	14.7	14.1
		20 + 20 + 20 + 25 + 50 20 + 20 + 20 + 25 + 60	2.00 1.86	2.00 1.86	2.00 1.86	2.50	5.00 5.59	_	4.0	13.5 13.5	14.0	1050 1050	3360 3350	3470 3470	15.3 15.2	14.6 14.6	14.0
		20 + 20 + 20 + 35 + 35	2.08	2.08	2.08	3.63	3.63	_	4.0	13.5	14.0	1050	3360	3470	15.3	14.6	14.0
		20 + 20 + 20 + 35 + 50	1.86	1.86	1.86	3.26	4.66	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
		20 + 20 + 20 + 35 + 60 20 + 20 + 20 + 50 + 50	1.74 1.69	1.74 1.69	1.74	3.05 4.22	5.23 4.22		4.0	13.5	14.0	1050	3350	3470 3470	15.2	14.6	14.0
		20 + 20 + 20 + 50 + 60	1.59	1.59	1.69 1.59	3.97	4.76	_	4.0	13.5 13.5	14.0 14.0	1050	3340 3340	3470	15.2 15.2	14.5 14.5	13.9
		20 + 20 + 20 + 60 + 60	1.50	1.50	1.50	4.50	4.50	_	4.0	13.5	14.0	1050	3330	3470	15.2	14.5	13.9
		20 + 20 + 25 + 25 + 25	2.35	2.35	2.93	2.93	2.93	_	4.0	13.5	14.0	1050	3370	3470	15.3	14.7	14.1
		20 + 20 + 25 + 25 + 35 20 + 20 + 25 + 25 + 50	2.16 1.93	2.16 1.93	2.70	2.70 2.41	3.78 4.82	_	4.0	13.5 13.5	14.0	1050 1050	3370	3470 3470	15.3 15.3	14.7 14.6	14.1
		20 + 20 + 25 + 25 + 60	1.80	1.80	2.41	2.25	5.40	_	4.0	13.5	14.0	1050	3360 3350	3470	15.3	14.6	14.0
_		20 + 20 + 25 + 35 + 35	2.00	2.00	2.50	3.50	3.50	_	4.0	13.5	14.0	1050	3360	3470	15.3	14.6	14.0
ö		20 + 20 + 25 + 35 + 50	1.80	1.80	2.25	3.15	4.50	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
operation		20 + 20 + 25 + 35 + 60 20 + 20 + 25 + 50 + 50	1.69 1.64	1.69 1.64	2.11	2.95 4.09	5.06 4.09	_	4.0	13.5 13.5	14.0	1050 1050	3340 3340	3470 3470	15.2 15.2	14.5 14.5	13.9 13.9
do		20 + 20 + 25 + 50 + 60	1.54	1.54	1.93	3.86	4.63		4.0	13.5	14.0	1050	3340	3470	15.2	14.5	13.9
Heating		20 + 20 + 25 + 60 + 60	1.46	1.46	1.82	4.38	4.38	_	4.0	13.5	14.0	1050	3330	3470	15.2	14.5	13.9
eat		20 + 20 + 35 + 35 + 35	1.86	1.86	3.26	3.26	3.26		4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
Ĭ		20 + 20 + 35 + 35 + 50 20 + 20 + 35 + 35 + 60	1.69 1.59	1.69 1.59	2.95 2.78	2.95 2.78	4.22 4.76	_	4.0	13.5 13.5	14.0 14.0	1050	3340 3340	3470 3470	15.2 15.2	14.5 14.5	13.9
		20 + 20 + 35 + 50 + 50	1.54	1.54	2.70	3.86	3.86	_	4.0	13.5	14.0	1050	3340	3470	15.2	14.5	13.9
		20 + 20 + 35 + 50 + 60	1.46	1.46	2.55	3.65	4.38	_	4.0	13.5	14.0	1050	3330	3470	15.2	14.5	13.9
		20 + 20 + 35 + 60 + 60 20 + 20 + 50 + 50 + 50	1.38 1.42	1.38 1.42	2.42 3.55	4.15 3.55	4.15 3.55	_	4.0	13.5 13.5	14.0	1050	3320 3320	3470 3470	15.1 15.1	14.4	13.8
		20 + 25 + 25 + 25 + 25	2.25	2.81	2.81	2.81	2.81	_	4.0	13.5	14.0	1050	3370	3470	15.3	14.7	14.1
		20 + 25 + 25 + 25 + 35	2.08	2.60	2.60	2.60	3.63	_	4.0	13.5	14.0	1050	3360	3470	15.3	14.6	14.0
	5	20 + 25 + 25 + 25 + 50	1.86	2.33	2.33	2.33	4.66	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
	TOOM	20 + 25 + 25 + 25 + 60	1.74 1.93	2.18	2.18	2.18 3.38	5.23 3.38	_	4.0	13.5	14.0	1050	3350 3360	3470 3470	15.2 15.3	14.6 14.6	14.0
		20 + 25 + 25 + 35 + 50	1.74	2.18	2.18	3.05	4.35	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
		20 + 25 + 25 + 35 + 60	1.64	2.05	2.05	2.86	4.91	_	4.0	13.5	14.0	1050	3340	3470	15.2	14.5	13.9
		20 + 25 + 25 + 50 + 50 20 + 25 + 25 + 50 + 60	1.59 1.50	1.99	1.99 1.88	3.97 3.75	3.97 4.50	_	4.0	13.5 13.5	14.0 14.0	1050 1050	3340 3330	3470 3470	15.2 15.2	14.5 14.5	13.9 13.9
		20 + 25 + 25 + 60 + 60	1.42	1.78	1.78	4.26	4.26	_	4.0	13.5	14.0	1050	3320	3470	15.2	14.5	13.8
		20 + 25 + 35 + 35 + 35	1.80	2.25	3.15	3.15	3.15	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
		20 + 25 + 35 + 35 + 50 20 + 25 + 35 + 35 + 60	1.64 1.54	2.05 1.93	2.86	2.86	4.09 4.63		4.0 4.0	13.5	14.0	1050	3340 3340	3470	15.2	14.5	13.9
		20 + 25 + 35 + 35 + 60	1.54	1.93	2.70 2.63	3.75	3.75	_	4.0	13.5 13.5	14.0 14.0	1050 1050	3340	3470 3470	15.2 15.2	14.5 14.5	13.9
		20 + 25 + 35 + 50 + 60	1.42	1.78	2.49	3.55	4.26	_	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
		20 + 25 + 50 + 50 + 50	1.38	1.73	3.46	3.46	3.46	_	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
		20 + 35 + 35 + 35 + 35 20 + 35 + 35 + 35 + 50	1.69 1.54	2.95	2.95	2.95 2.70	2.95 3.86	_	4.0	13.5 13.5	14.0	1050 1050	3340 3340	3470 3470	15.2	14.5	13.9
		20 + 35 + 35 + 35 + 50	1.54	2.70	2.70	2.70	4.38	_	4.0	13.5	14.0	1050	3340	3470	15.2 15.2	14.5 14.5	13.9 13.9
		20 + 35 + 35 + 50 + 50	1.42	2.49	2.49	3.55	3.55	_	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
		25 + 25 + 25 + 25 + 25	2.70	2.70	2.70	2.70	2.70	_	4.0	13.5	14.0	1050	3370	3470	15.3	14.7	14.1
		25 + 25 + 25 + 25 + 35 25 + 25 + 25 + 25 + 50	2.50 2.25	2.50	2.50	2.50	3.50 4.50	_	4.0	13.5 13.5	14.0	1050	3360 3350	3470 3470	15.3 15.2	14.6	14.0
		25 + 25 + 25 + 25 + 50 25 + 25 + 25 + 25 + 60	2.25	2.25	2.25	2.25	5.06	_	4.0	13.5	14.0	1050 1050	3350	3470	15.2	14.6 14.5	14.0 13.9
		25 + 25 + 25 + 35 + 35	2.33	2.33	2.33	3.26	3.26	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
		25 + 25 + 25 + 35 + 50	2.11	2.11	2.11	2.95	4.22	_	4.0	13.5	14.0	1050	3340	3470	15.2	14.5	13.9
		25 + 25 + 25 + 35 + 60 25 + 25 + 25 + 50 + 50	1.99 1.93	1.99 1.93	1.99 1.93	2.78 3.86	4.76 3.86	_	4.0	13.5 13.5	14.0	1050 1050	3340 3340	3470 3470	15.2 15.2	14.5 14.5	13.9
		25 + 25 + 25 + 50 + 60	1.82	1.82	1.82	3.65	4.38	_	4.0	13.5	14.0	1050	3330	3470	15.2	14.5	13.9
		25 + 25 + 25 + 60 + 60	1.73	1.73	1.73	4.15	4.15	_	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
		25 + 25 + 35 + 35 + 35	2.18	2.18	3.05	3.05	3.05	_	4.0	13.5	14.0	1050	3350	3470	15.2	14.6	14.0
		25 + 25 + 35 + 35 + 50 25 + 25 + 35 + 35 + 60	1.99 1.88	1.99 1.88	2.78	2.78	3.97 4.50	_	4.0	13.5 13.5	14.0	1050	3340 3330	3470 3470	15.2 15.2	14.5 14.5	13.9
		25 + 25 + 35 + 50 + 50	1.82	1.82	2.55	3.65	3.65	_	4.0	13.5	14.0	1050	3330	3470	15.2	14.5	13.9
		25 + 25 + 35 + 50 + 60	1.73	1.73	2.42	3.46	4.15	_	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
		25 + 35 + 35 + 35 + 35	2.05	2.86	2.86	2.86	2.86	_	4.0	13.5	14.0	1050	3340	3470	15.2	14.5	13.9
		25 + 35 + 35 + 35 + 50 25 + 35 + 35 + 35 + 60	1.88 1.78	2.63	2.63	2.63 2.49	3.75 4.26	_	4.0	13.5 13.5	14.0	1050	3330 3320	3470 3470	15.2 15.1	14.5 14.4	13.9

	In also a consta				Heatin	g capacity	/ (kW)				Power	consump	tion (W)	Stand	ard curre	ent (A)
	Indoor unit		Roo	m heating	capacity			Tota	al capacity	(kW)			` '			
(combination	A room	B room	C room	D room	E room	F room	Min.	Standard		Min.	Standard	Max.	220V	230V	240\
5	25 + 35 + 35 + 50 + 50	1.73	2.42	2.42	3.46	3.46	_	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
room	35 + 35 + 35 + 35 + 35	2.70	2.70	2.70	2.70	2.70	_	4.0	13.5	14.0	1050	3340	3470	15.2	14.5	13.9
	35 + 35 + 35 + 35 + 50	2.49	2.49	2.49	2.49	3.55	-	4.0	13.5	14.0	1050	3320	3470	15.1	14.4	13.8
	20 + 20 + 20 + 20 + 20 + 20	2.25 2.16	2.25	2.25	2.25	2.25	2.25	4.5 4.5	13.5	14.0	1150	3260	3420	14.8	14.2	13.6
	20 + 20 + 20 + 20 + 20 + 25 20 + 20 + 20 + 20 + 20 + 35	2.10	2.16	2.16	2.16	2.16	3.50	4.5	13.5 13.5	14.0 14.0	1150	3250	3420	14.8	14.1 14.1	13.6 13.6
	20 + 20 + 20 + 20 + 20 + 35	1.80	1.80	1.80	1.80	1.80	4.50	4.5	13.5	14.0	1150 1150	3250 3250	3420 3420	14.8	14.1	13.6
	20 + 20 + 20 + 20 + 20 + 60	1.69	1.69	1.69	1.69	1.69	5.06	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.5
	20 + 20 + 20 + 20 + 25 + 25	2.08	2.08	2.08	2.08	2.60	2.60	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.6
	20 + 20 + 20 + 20 + 25 + 35	1.93	1.93	1.93	1.93	2.41	3.38	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.6
	20 + 20 + 20 + 20 + 25 + 50	1.74	1.74	1.74	1.74	2.18	4.35	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.5
	20 + 20 + 20 + 20 + 25 + 60	1.64	1.64	1.64	1.64	2.05	4.91	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.5
	20 + 20 + 20 + 20 + 35 + 35	1.80	1.80	1.80	1.80	3.15	3.15	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.0
	20 + 20 + 20 + 20 + 35 + 50	1.64	1.64	1.64	1.64	2.86	4.09	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	20 + 20 + 20 + 20 + 35 + 60	1.54	1.54	1.54	1.54	2.70	4.63	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.5
	20 + 20 + 20 + 20 + 50 + 50	1.50	1.50	1.50	1.50	3.75	3.75	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.5
	20 + 20 + 20 + 20 + 50 + 60	1.42	1.42	1.42	1.42	3.55	4.26	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.5
	20 + 20 + 20 + 25 + 25 + 25	2.00	2.00	2.00	2.50	2.50	2.50	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.6
	20 + 20 + 20 + 25 + 25 + 35	1.86	1.86	1.86	2.33	2.33	3.26	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.0
	20 + 20 + 20 + 25 + 25 + 50	1.69	1.69	1.69	2.11	2.11	4.22	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	20 + 20 + 20 + 25 + 25 + 60 20 + 20 + 20 + 25 + 35 + 35	1.59 1.74	1.59	1.59	1.99 2.18	1.99 3.05	4.76 3.05	4.5 4.5	13.5 13.5	14.0 14.0	1150	3240	3420 3420	14.7	14.1 14.1	13.
	20 + 20 + 20 + 25 + 35 + 35	1.74	1.74	1.74	1.99	2.78	3.05	4.5	13.5	14.0	1150 1150	3240 3240	3420	14.7	14.1	13.5
	20 + 20 + 20 + 25 + 35 + 60	1.50	1.59	1.50	1.88	2.63	4.50	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 20 + 25 + 50 + 50	1.46	1.46	1.46	1.82	3.65	3.65	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 20 + 25 + 50 + 60	1.38	1.38	1.38	1.73	3.46	4.15	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.
	20 + 20 + 20 + 35 + 35 + 35	1.64	1.64	1.64	2.86	2.86	2.86	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	20 + 20 + 20 + 35 + 35 + 50	1.50	1.50	1.50	2.63	2.63	3.75	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 20 + 35 + 35 + 60	1.42	1.42	1.42	2.49	2.49	4.26	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 20 + 35 + 50 + 50	1.38	1.38	1.38	2.42	3.46	3.46	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.4
	20 + 20 + 25 + 25 + 25 + 25	1.93	1.93	2.41	2.41	2.41	2.41	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.6
	20 + 20 + 25 + 25 + 25 + 35	1.80	1.80	2.25	2.25	2.25	3.15	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.6
	20 + 20 + 25 + 25 + 25 + 50	1.64	1.64	2.05	2.05	2.05	4.09	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.5
	20 + 20 + 25 + 25 + 25 + 60	1.54	1.54	1.93	1.93	1.93	4.63	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
6	20 + 20 + 25 + 25 + 35 + 35	1.69	1.69	2.11	2.11	2.95	2.95	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
room		1.54 1.46	1.54 1.46	1.93 1.82	1.93	2.70	3.86	4.5	13.5	14.0	1150	3230	3420 3420	14.7	14.1	13.5
	20 + 20 + 25 + 25 + 35 + 60 20 + 20 + 25 + 25 + 50 + 50	1.40	1.40	1.78	1.82 1.78	2.55 3.55	4.38 3.55	4.5 4.5	13.5 13.5	14.0 14.0	1150 1150	3230 3230	3420	14.7	14.1 14.1	13.
	20 + 20 + 25 + 35 + 35 + 35	1.59	1.59	1.78	2.78	2.78	2.78	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 25 + 35 + 35 + 50	1.46	1.46	1.82	2.55	2.55	3.65	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 25 + 35 + 35 + 60	1.38	1.38	1.73	2.42	2.42	4.15	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.
	20 + 20 + 35 + 35 + 35 + 35	1.50	1.50	2.63	2.63	2.63	2.63	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 20 + 35 + 35 + 35 + 50	1.38	1.38	2.42	2.42	2.42	3.46	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.
	20 + 25 + 25 + 25 + 25 + 25	1.86	2.33	2.33	2.33	2.33	2.33	4.5	13.5	14.0	1150	3250	3420	14.8	14.1	13.
	20 + 25 + 25 + 25 + 25 + 35	1.74	2.18	2.18	2.18	2.18	3.05	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	20 + 25 + 25 + 25 + 25 + 50	1.59	1.99	1.99	1.99	1.99	3.97	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	20 + 25 + 25 + 25 + 25 + 60	1.50	1.88	1.88	1.88	1.88	4.50	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 25 + 25 + 25 + 35 + 35	1.64	2.05	2.05	2.05	2.86	2.86	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	20 + 25 + 25 + 25 + 35 + 50	1.50	1.88	1.88	1.88	2.63	3.75	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 25 + 25 + 25 + 35 + 60	1.42	1.78	1.78 1.73	1.78	2.49	4.26 3.46	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 25 + 25 + 25 + 50 + 50 20 + 25 + 25 + 35 + 35 + 35	1.38 1.54	1.73 1.93	1.73	1.73 2.70	3.46 2.70	2.70	4.5 4.5	13.5 13.5	14.0 14.0	1150	3220	3420 3420	14.7	14.0 14.1	13.
	20 + 25 + 25 + 35 + 35 + 35	1.54	1.78	1.78	2.70	2.70	3.55	4.5	13.5	14.0	1150 1150	3230 3230	3420	14.7	14.1	13.
	20 + 25 + 35 + 35 + 35 + 35	1.42	1.76	2.55	2.49	2.49	2.55	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	20 + 35 + 35 + 35 + 35 + 35	1.38	2.42	2.42	2.42	2.42	2.42	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.
	25 + 25 + 25 + 25 + 25 + 25	2.25	2.25	2.25	2.25	2.25	2.25	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	25 + 25 + 25 + 25 + 25 + 35	2.11	2.11	2.11	2.11	2.11	2.95	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	25 + 25 + 25 + 25 + 25 + 50	1.93	1.93	1.93	1.93	1.93	3.86	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	25 + 25 + 25 + 25 + 25 + 60	1.82	1.82	1.82	1.82	1.82	4.38	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	25 + 25 + 25 + 25 + 35 + 35	1.99	1.99	1.99	1.99	2.78	2.78	4.5	13.5	14.0	1150	3240	3420	14.7	14.1	13.
	25 + 25 + 25 + 25 + 35 + 50	1.82	1.82	1.82	1.82	2.55	3.65	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	25 + 25 + 25 + 25 + 35 + 60	1.73	1.73	1.73	1.73	2.42	4.15	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.
	25 + 25 + 25 + 35 + 35 + 35	1.88	1.88	1.88	2.63	2.63	2.63	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.
	25 + 25 + 25 + 35 + 35 + 50	1.73	1.73	1.73	2.42	2.42	3.46	4.5	13.5	14.0	1150	3220	3420	14.7	14.0	13.
	25 + 25 + 35 + 35 + 35 + 35	1.78	1.78	2.49	2.49	2.49	2.49	4.5	13.5	14.0	1150	3230	3420	14.7	14.1	13.

		mala au conta					g capacity	/ (kW)				Power	consump	tion (W)	Standa	ard curre	ent (A)
		ndoor unit ombination		Roo	m cooling	capacity ((kW)		Tota	al capacity	(kW)	8.01	04	NA	0001/	0001/	04014
	С	ombination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	2.0	_	_	_	_	_	1.8	2.0	2.8	650	750	1100	3.4	3.3	3.2
	4	25	2.5	_	_	_	_	_	1.8	2.5	3.4	650	950	1350	4.4	4.2	4.0
	room	35	3.5	_	_	_	_	_	1.8	3.5	3.9	650	1400	1600	6.4	6.1	5.9
		50	5.0	_	_	_	_	_	1.8	5.0	6.1	650	2000	2500	9.2	8.8	8.4
		60	6.0	_	_	_	_	_	1.8	6.0	7.0	650	2450	3000	11.2	10.8	10.3
		20 + 20	2.00	2.00	_	_	_	_	3.0	4.0	5.6	740	910	1460	4.2	4.0	3.8
		20 + 25	2.00	2.50	_	_	_	_	3.0	4.5	6.2	740	1050	1820	4.8	4.6	4.4
		20 + 35	2.00	3.50	_	_	_	_	3.0	5.5	6.7	740	1430	2020	6.6	6.3	6.0
=		20 + 50	2.00	5.00	_	_	_	_	3.0	7.0	8.9	740	2180	2820	10.0	9.6	9.2
operation		20 + 60	2.00	6.00	_	_	_	_	3.0	8.0	9.8	740	2530	3360	11.6	11.1	10.6
67.0		25 + 25	2.50	2.50	_	_	_	_	3.0	5.0	6.8	740	1350	2200	6.2	5.9	5.7
ĕ	2	25 + 35	2.50	3.50	_	_	_	_	3.0	6.0	7.3	740	1720	2320	7.9	7.6	7.2
	room	25 + 50	2.50	5.00	_	_	_	_	3.0	7.5	9.5	740	2350	3220	10.8	10.3	9.9
Cooling		25 + 60	2.50	6.00	_	_	_	_	3.0	8.5	9.8	740	2680	3360	12.3	11.8	11.3
8		35 + 35	3.50	3.50					3.0	7.0	7.8	740	2180	2820	10.0	9.6	9.2
O		35 + 50	3.50	5.00	_	_	_	_	3.0	8.5	10.0	740	2680	3620	12.3	11.8	11.3
		35 + 60	3.50	6.00		_			3.0	9.5	10.9	740	3120	3990	14.3	13.7	13.1
		50 + 50	5.00	5.00	_	_		_	3.0	10.0	12.2	740	3350	4450	15.4	14.7	14.1
		50 + 60	5.00	6.00	_	_	_	_	3.0	11.0	12.5	740	3685	4520	16.9	16.2	15.5
		60 + 60	6.00	6.00	_	_	_	_	3.0	12.0	12.5	740	4200	4520	19.3	18.4	17.7
	3	20 + 20 + 20	2.00	2.00	2.00	_	_	_	3.7	6.0	8.4	880	1460	2560	6.7	6.4	6.1
	room	20 + 20 + 25	2.00	2.00	2.50	_	_	_	3.7	6.5	9.0	880	1650	2700	7.6	7.2	6.9
		20 + 20 + 35	2.00	2.00	3.50	_	_	_	3.7	7.5	9.5	880	1980	3120	9.1	8.7	8.3

	Indoor unit					ng capacit	y (kW)	T-4-		(1-14/)	Power	consump	tion (W)	Stand	ard curre	ent (A)
	combination	A room	B room	C room	D room	E room	Froom	Min.	al capacity Standard		Min.	Standard	Max.	220V	230V	240V
	20 + 20 + 50	2.00	2.00	5.00	_	_	_	3.7	9.0	11.7	880	2600	4120	11.9	11.4	10.9
	20 + 20 + 60	2.00	2.00	6.00	_	_	_	3.7	10.0	12.6	880	3120	4680	14.3	13.7	13.1
	20 + 25 + 25 20 + 25 + 35	2.00	2.50 2.50	2.50 3.50	_	_	_	3.7	7.0 8.0	9.6	880 880	1850 2320	3210 3630	8.5 10.7	8.1 10.2	7.8 9.8
	20 + 25 + 50	2.00	2.50	5.00	_	_	_	3.7	9.5	12.3	880	2980	4510	13.7	13.1	12.5
	20 + 25 + 60	2.00	2.50	6.00	_	_	_	3.7	10.5	12.8	880	3590	4800	16.5	15.8	15.1
	20 + 35 + 35	2.00	3.50	3.50				3.7	9.0	10.6	880	2780	4120	12.8	12.2	11.7
	20 + 35 + 50 20 + 35 + 60	2.00	3.50 3.50	5.00 6.00	_	_		3.7	10.5 11.5	12.8 12.8	880 880	3590 3950	4800 4800	16.5 18.1	15.8 17.3	15.1 16.6
	20 + 50 + 50	2.00	5.00	5.00				3.7	12.0	12.8	880	4230	4800	19.4	18.6	17.8
	20 + 50 + 60	1.92	4.81	5.77	_	_	_	3.7	12.5	12.8	880	4450	4800	20.4	19.5	18.7
	20 + 60 + 60	1.79	5.36	5.36	_	_	_	3.7	12.5	12.8	880	4450	4800	20.4	19.5	18.7
	25 + 25 + 25 25 + 25 + 35	2.50 2.50	2.50	2.50	_	_		3.7 3.7	7.5 8.5	10.2	880	2030	3640 3900	9.3 11.6	8.9	8.5
	25 + 25 + 50	2.50	2.50 2.50	3.50 5.00				3.7	10.0	10.7 12.8	880 880	2520 3260	4800	15.0	11.1	10.6
3	25 + 25 + 60	2.50	2.50	6.00	_	_	_	3.7	11.0	12.8	880	3720	4800	17.1	16.3	15.7
rooi	20 1 00 1 00	2.50	3.50	3.50	_	_	_	3.7	9.5	11.2	880	2980	4510	13.7	13.1	12.5
	25 + 35 + 50	2.50 2.50	3.50	5.00				3.7	11.0 12.0	12.8 12.8	880	3720	4800 4800	17.1 19.4	16.3	15.7
	25 + 35 + 60 25 + 50 + 50	2.50	3.50 5.00	6.00 5.00				3.7 3.7	12.5	12.8	880 880	4230 4450	4800	20.4	18.6 19.5	17.8
	25 + 50 + 60	2.31	4.63	5.56	_	_	_	3.7	12.5	12.8	880	4450	4800	20.4	19.5	18.7
	25 + 60 + 60	2.16	5.17	5.17	_	_	_	3.7	12.5	12.8	880	4450	4800	20.4	19.5	18.7
	35 + 35 + 35	3.50	3.50	3.50	_	_	_	3.7	10.5	11.7	880	3590	4180	16.5	15.8	15.1
	35 + 35 + 50 35 + 35 + 60	3.50 3.37	3.50 3.37	5.00 5.77	_	_	_	3.7 3.7	12.0 12.5	12.8 12.8	880 880	4230 4450	4800 4800	19.4 20.4	18.6 19.5	17.8
	35 + 50 + 50	3.24	4.63	4.63		_	_	3.7	12.5	12.8	880	4450	4800	20.4	19.5	18.7
	35 + 50 + 60	3.02	4.31	5.17	_	_	_	3.7	12.5	12.8	880	4450	4800	20.2	19.3	18.5
	35 + 60 + 60	2.82	4.84	4.84	_	_	_	3.7	12.5	12.8	880	4450	4800	20.2	19.3	18.5
	50 + 50 + 50 50 + 50 + 60	4.17 3.91	4.17 3.91	4.17 4.69	_	_	_	3.7	12.5 12.5	12.8 12.8	880 880	4440 4440	4800 4800	20.4	19.5 19.5	18.7
	50 + 60 + 60	3.68	4.41	4.41	_	_	_	3.7	12.5	12.8	880	4430	4800	20.4	19.5	18.6
	60 + 60 + 60	4.17	4.17	4.17	_	_	_	3.7	12.5	12.8	880	4430	4800	20.3	19.5	18.6
	20 + 20 + 20 + 20	2.00	2.00	2.00	2.00			4.4 4.4	8.0 8.5	11.2	1100	2050	3680 3890	9.3	8.9	8.6
	20 + 20 + 20 + 25 20 + 20 + 20 + 35	2.00	2.00	2.00	2.50 3.50			4.4	9.5	11.8 12.3	1100	2320 2820	4530	10.6 12.8	10.1 12.3	9.7
	20 + 20 + 20 + 50	2.00	2.00	2.00	5.00	_	_	4.4	11.0	13.0	1100	3480	4800	15.8	15.1	14.5
	20 + 20 + 20 + 60	2.00	2.00	2.00	6.00	_	_	4.4	12.0	13.0	1100	3980	4800	18.1	17.3	16.6
	20 + 20 + 25 + 25	2.00	2.00	2.50	2.50	_	_	4.4	9.0	12.4	1100	2520	4590	11.5	11.0	10.5
	20 + 20 + 25 + 35 20 + 20 + 25 + 50	2.00	2.00	2.50 2.50	3.50 5.00		_	4.4 4.4	10.0 11.5	12.9 13.0	1100	3120 3720	4780 4800	14.2 16.9	13.6 16.2	13.0 15.5
	20 + 20 + 25 + 60	2.00	2.00	2.50	6.00	_	_	4.4	12.5	13.0	1100	4600	4800	20.9	20.0	19.2
	20 + 20 + 35 + 35	2.00	2.00	3.50	3.50	_	_	4.4	11.0	13.0	1100	3480	4800	15.8	15.1	14.5
ы В	20 + 20 + 35 + 50	2.00	2.00	3.50	5.00			4.4	12.5	13.0	1100	4600	4800	20.9	20.0	19.2
rati	20 + 20 + 35 + 60 20 + 20 + 50 + 50	1.85 1.79	1.85 1.79	3.24 4.46	5.56 4.46		_	4.4	12.5 12.5	13.0 13.0	1100	4590 4590	4800 4800	20.9	20.0	19.1 19.1
be	20 + 20 + 50 + 60	1.67	1.67	4.17	5.00	_	_	4.4	12.5	13.0	1100	4590	4800	20.9	20.0	19.1
Cooling operation	20 + 20 + 60 + 60	1.56	1.56	4.69	4.69	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
 	20 + 25 + 25 + 25 20 + 25 + 25 + 35	2.00	2.50 2.50	2.50 2.50	2.50 3.50	_	_	4.4 4.4	9.5	13.0 13.0	1100	2820	4800 4800	12.8 15.2	12.3 14.5	11.8
ပို	20 + 25 + 25 + 50	2.00	2.50	2.50	5.00	_		4.4	12.0	13.0	1100	3340 3980	4800	18.1	17.3	13.9 16.6
	20 + 25 + 25 + 60	1.92	2.40	2.40	5.77	_	_	4.4	12.5	13.0	1100	4600	4800	20.9	20.0	19.2
	20 + 25 + 35 + 35	2.00	2.50	3.50	3.50	_	_	4.4	11.5	13.0	1100	3720	4800	16.9	16.2	15.5
	20 + 25 + 35 + 50 20 + 25 + 35 + 60	1.92 1.79	2.40	3.37	4.81 5.36	_	_	4.4	12.5 12.5	13.0 13.0	1100	4600 4590	4800 4800	20.9	20.0	19.2 19.1
	20 + 25 + 50 + 50	1.72	2.16	4.31	4.31	_	_	4.4	12.5	13.0	1100	4590	4800	20.9	20.0	19.1
	20 + 25 + 50 + 60	1.61	2.02	4.03	4.84	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	20 + 25 + 60 + 60	1.52	1.89	4.55	4.55	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	20 + 35 + 35 + 35 20 + 35 + 35 + 50	2.00 1.79	3.50 3.13	3.50 3.13	3.50 4.46		_	4.4 4.4	12.5 12.5	13.0 13.0	1100	4600 4590	4800 4800	20.9	20.0	19.2
	20 + 35 + 35 + 60	1.67	2.92	2.92	5.00	_	_	4.4	12.5	13.0	1100	4590	4800	20.9	20.0	19.1
	20 + 35 + 50 + 50	1.61	2.82	4.03	4.03	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
4	20 + 35 + 50 + 60	1.52	2.65	3.79	4.55	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
rooi	m 20 + 35 + 60 + 60 20 + 50 + 50 + 50	1.43	2.50 3.68	4.29 3.68	4.29 3.68	_	_	5.4 4.4	12.5 12.5	13.0	1100	4570 4580	4801 4800	20.6	19.7 19.9	18.9 19.1
	20 + 50 + 50 + 60	1.39	3.47	3.47	4.17	_	_	4.4	12.5	13.0	1100	4570	4800	20.8	19.9	19.1
	20 + 50 + 60 + 60	1.32	3.29	3.95	3.95	_	_	4.4	12.5	13.0	1100	4560	4800	20.7	19.8	19.0
	25 + 25 + 25 + 25	2.50	2.50	2.50	2.50	_	_	4.4	10.0	13.0	1100	3120	4800	14.2	13.6	13.0
	25 + 25 + 25 + 35 25 + 25 + 25 + 50	2.50 2.50	2.50 2.50	2.50 2.50	3.50 5.00	_	_	4.4 4.4	11.0 12.5	13.0 13.0	1100	3480 4600	4800 4800	15.8 20.9	15.1 20.0	14.5 19.2
	25 + 25 + 25 + 60	2.31	2.31	2.31	5.56	_	_	4.4	12.5	13.0	1100	4590	4800	20.9	20.0	19.1
	25 + 25 + 35 + 35	2.50	2.50	3.50	3.50	_	_	4.4	12.0	13.0	1100	3980	4800	18.1	17.3	16.6
	25 + 25 + 35 + 50	2.31	2.31	3.24	4.63	_	_	4.4	12.5	13.0	1100	4590	4800	20.9	20.0	19.1
	25 + 25 + 35 + 60 25 + 25 + 50 + 50	2.16	2.16	3.02 4.17	5.17 4.17			4.4 4.4	12.5 12.5	13.0	1100	4590 4590	4800 4800	20.9	20.0	19.1 19.1
	25 + 25 + 50 + 60	1.95	1.95	3.91	4.69	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	25 + 25 + 60 + 60	1.84	1.84	4.41	4.41	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	25 + 35 + 35 + 35	2.40	3.37	3.37	3.37	_	_	4.4	12.5	13.0	1100	4600	4800	20.9	20.0	19.2
	25 + 35 + 35 + 50 25 + 35 + 35 + 60	2.16	3.02 2.82	3.02 2.82	4.31 4.84	_	_	4.4 4.4	12.5 12.5	13.0 13.0	1100	4590 4580	4800 4800	20.9	20.0 19.9	19.1 19.1
	25 + 35 + 50 + 50	1.95	2.73	3.91	3.91	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	25 + 35 + 50 + 60	1.84	2.57	3.68	4.41	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	25 + 35 + 60 + 60	1.74	2.43	4.17	4.17	_	_	4.4	12.5	13.0	1100	4570	4800	20.8	19.9	19.1
	25 + 50 + 50 + 50 25 + 50 + 50 + 60	1.79 1.69	3.57	3.57 3.38	3.57 4.05			4.4	12.5 12.5	13.0 13.0	1100	4570 4570	4800 4800	20.8	19.9 19.9	19.1 19.1
	25 + 50 + 60 + 60	1.60	3.38	3.85	3.85	_	_	4.4	12.5	13.0	1100	4560	4800	20.7	19.9	19.1
	35 + 35 + 35 + 35	3.13	3.13	3.13	3.13	_	_	4.4	12.5	13.0	1100	4590	4800	20.9	20.0	19.1
	35 + 35 + 35 + 50	2.82	2.82	2.82	4.03	_	_	4.4	12.5	13.0	1100	4580	4800	20.8	19.9	19.1
	35 + 35 + 35 + 60 35 + 35 + 50 + 50	2.65	2.65 2.57	2.65 3.68	4.55 3.68	_	_	4.4	12.5 12.5	13.0 13.0	1100	4580 4580	4800 4800	20.8	19.9 19.9	19.1
	35 + 35 + 50 + 60	2.43	2.43	3.47	4.17	_	_	4.4	12.5	13.0	1100	4570	4800	20.8	19.9	19.1
	35 + 35 + 60 + 60	2.30	2.30	3.95	3.95	_	_	4.4	12.5	13.0	1100	4560	4800	20.7	19.8	19.0
	35 + 50 + 50 + 50 35 + 50 + 50 + 60	2.36	3.38	3.38	3.38	_	_	4.4	12.5	13.0	1100	4570	4800	20.8	19.9	19.1
		2.24	3.21	3.21	3.85	_	_	4.4	12.5	13.0	1100	4560	4800	20.7	19.8	19.0

	Indoor unit		Boo	m cooling	capacity	g capacity (kW)	/ (KW)	Tota	I capacity	(kW)		consump	tion (w)		ard curre	
C	combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240
	20 + 20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	2.00		5.1	10.0	13.5	1210	2880	4800	13.1	12.5	12
	20 + 20 + 20 + 20 + 25	2.00	2.00	2.00	2.00	2.50		5.1	10.5	13.5	1210	3120	4800	14.2	13.6	13.
	20 + 20 + 20 + 20 + 35 20 + 20 + 20 + 20 + 50	1.92	2.00 1.92	2.00 1.92	2.00 1.92	3.50 4.81	_	5.1 5.1	11.5 12.5	13.5 13.5	1210 1210	3620 4320	4800 4800	16.5 19.7	15.8 18.8	15
	20 + 20 + 20 + 20 + 60	1.79	1.79	1.79	1.79	5.36		5.1	12.5	13.5	1210	4310	4800	19.6	18.8	18
	20 + 20 + 20 + 25 + 25	2.00	2.00	2.00	2.50	2.50	_	5.1	11.0	13.5	1210	3320	4800	15.1	14.4	13
	20 + 20 + 20 + 25 + 35	2.00	2.00	2.00	2.50	3.50	_	5.1	12.0	13.5	1210	3990	4800	18.2	17.4	16
	20 + 20 + 20 + 25 + 50	1.85	1.85	1.85	2.31	4.63	_	5.1	12.5	13.5	1210	4320	4800	19.7	18.8	18
	20 + 20 + 20 + 25 + 60	1.72	1.72	1.72	2.16	5.17	_	5.1	12.5	13.5	1210	4310	4800	19.6	18.8	18
	20 + 20 + 20 + 35 + 35	1.92	1.92	1.92	3.37	3.37	_	5.1	12.5	13.5	1210	4320	4800	19.7	18.8	18
	20 + 20 + 20 + 35 + 50	1.72	1.72	1.72	3.02	4.31	_	5.1	12.5	13.5	1210	4310	4800	19.6	18.8	18
	20 + 20 + 20 + 35 + 60	1.61	1.61	1.61	2.82	4.84	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 20 + 20 + 50 + 50	1.56	1.56	1.56	3.91	3.91		5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 20 + 20 + 50 + 60	1.47	1.47	1.47	3.68	4.41	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	20 + 20 + 20 + 60 + 60 20 + 20 + 25 + 25 + 25	1.39 2.00	1.39 2.00	1.39 2.50	4.17 2.50	4.17 2.50	_	5.1 5.1	12.5 11.5	13.5 13.5	1210 1210	4280	4800 4800	19.5 16.5	18.6 15.8	1
	20 + 20 + 25 + 25 + 25	2.00	2.00	2.50	2.50	3.50		5.1	12.5	13.5	1210	3620 4330	4800	19.7	18.8	1:
	20 + 20 + 25 + 25 + 50	1.79	1.79	2.23	2.23	4.46		5.1	12.5	13.5	1210	4310	4800	19.6	18.8	1
	20 + 20 + 25 + 25 + 60	1.67	1.67	2.08	2.08	5.00	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 20 + 25 + 35 + 35	1.85	1.85	2.31	3.24	3.24	_	5.1	12.5	13.5	1210	4320	4800	19.7	18.8	1
	20 + 20 + 25 + 35 + 50	1.67	1.67	2.08	2.92	4.17	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 20 + 25 + 35 + 60	1.56	1.56	1.95	2.73	4.69	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 20 + 25 + 50 + 50	1.52	1.52	1.89	3.79	3.79	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	20 + 20 + 25 + 50 + 60	1.43	1.43	1.79	3.57	4.29	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 20 + 25 + 60 + 60	1.35	1.35	1.69	4.05	4.05	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 20 + 35 + 35 + 35	1.72	1.72	3.02	3.02	3.02	_	5.1	12.5	13.5	1210	4310	4800	19.6	18.8	1
	20 + 20 + 35 + 35 + 50	1.56	1.56	2.73	2.73	3.91		5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 20 + 35 + 35 + 60	1.47	1.47	2.57	2.57	4.41	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	20 + 20 + 35 + 50 + 50	1.43	1.43	2.50	3.57	3.57		5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 20 + 35 + 50 + 60 20 + 20 + 35 + 60 + 60	1.35 1.28	1.35 1.28	2.36	3.38	4.05	_	5.1 5.1	12.5 12.5	13.5	1210	4280	4800 4800	19.5 19.4	18.6	1
	20 + 20 + 35 + 60 + 60	1.28	1.28	2.24 3.29	3.85	3.85 3.29		5.1	12.5	13.5 13.5	1210 1210	4270 4270	4800	19.4	18.6 18.6	1
	20 + 25 + 25 + 25 + 25	2.00	2.50	2.50	2.50	2.50	_	5.1	12.5	13.5	1210	3990	4800	18.2	17.4	1
	20 + 25 + 25 + 25 + 25	1.92	2.40	2.40	2.40	3.37	_	5.1	12.5	13.5	1210	4320	4800	19.7	18.8	1
	20 + 25 + 25 + 25 + 50	1.72	2.16	2.40	2.16	4.31		5.1	12.5	13.5	1210	4310	4800	19.6	18.8	1
_	20 + 25 + 25 + 25 + 60	1.61	2.02	2.02	2.02	4.84	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
5	20 + 25 + 25 + 35 + 35	1.79	2.23	2.23	3.13	3.13	_	5.1	12.5	13.5	1210	4310	4800	19.6	18.8	1
room	20 + 25 + 25 + 35 + 50	1.61	2.02	2.02	2.82	4.03	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 25 + 25 + 35 + 60	1.52	1.89	1.89	2.65	4.55	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	20 + 25 + 25 + 50 + 50	1.47	1.84	1.84	3.68	3.68	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	20 + 25 + 25 + 50 + 60	1.39	1.74	1.74	3.47	4.17		5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 25 + 25 + 60 + 60	1.32	1.64	1.64	3.95	3.95	_	5.1	12.5	13.5	1210	4270	4800	19.4	18.6	1
	20 + 25 + 35 + 35 + 35	1.67	2.08	2.92	2.92	2.92		5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	20 + 25 + 35 + 35 + 50	1.52	1.89	2.65	2.65	3.79	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	17
	20 + 25 + 35 + 35 + 60	1.43	1.79	2.50	2.50	4.29		5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 25 + 35 + 50 + 50	1.39	1.74	2.43	3.47	3.47		5.1 5.1	12.5	13.5	1210	4280	4800 4800	19.5 19.4	18.6	1
	20 + 25 + 35 + 50 + 60 20 + 25 + 50 + 50 + 50	1.32	1.60	2.30 3.21	3.29 3.21	3.95 3.21	_	5.1	12.5 12.5	13.5 13.5	1210 1210	4270 4270	4800	19.4	18.6 18.6	1
	20 + 35 + 35 + 35 + 35	1.56	2.73	2.73	2.73	2.73		5.1	12.5	13.5	1210	4300	4800	19.4	18.7	1
	20 + 35 + 35 + 35 + 50	1.43	2.50	2.50	2.50	3.57	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 35 + 35 + 35 + 60	1.35	2.36	2.36	2.36	4.05	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	20 + 35 + 35 + 50 + 50	1.32	2.30	2.30	3.29	3.29	_	5.1	12.5	13.5	1210	4270	4800	19.4	18.6	1
	25 + 25 + 25 + 25 + 25	2.50	2.50	2.50	2.50	2.50	_	5.1	12.5	13.5	1210	4330	4800	19.7	18.8	18
	25 + 25 + 25 + 25 + 35	2.31	2.31	2.31	2.31	3.24	_	5.1	12.5	13.5	1210	4320	4800	19.7	18.8	18
	25 + 25 + 25 + 25 + 50	2.08	2.08	2.08	2.08	4.17	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	25 + 25 + 25 + 25 + 60	1.95	1.95	1.95	1.95	4.69	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	25 + 25 + 25 + 35 + 35	2.16	2.16	2.16	3.02	3.02	_	5.1	12.5	13.5	1210	4310	4800	19.6	18.8	18
	25 + 25 + 25 + 35 + 50	1.95	1.95	1.95	2.73	3.91	_	5.1	12.5	13.5	1210	4300	4800	19.6	18.7	1
	25 + 25 + 25 + 35 + 60	1.84	1.84	1.84	2.57	4.41		5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	25 + 25 + 25 + 50 + 50	1.79	1.79	1.79	3.57	3.57	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	25 + 25 + 25 + 50 + 60	1.69	1.69 1.60	1.69 1.60	3.38	4.05		5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	25 + 25 + 25 + 60 + 60 25 + 25 + 35 + 35 + 35	1.60 2.02	2.02	2.82	3.85 2.82	3.85 2.82	_	5.1 5.1	12.5 12.5	13.5 13.5	1210	4270 4300	4800 4800	19.4 19.6	18.6 18.7	1
	25 + 25 + 35 + 35 + 35 25 + 25 + 35 + 35 + 50	1.84	1.84	2.82	2.82	3.68	_	5.1	12.5	13.5	1210 1210	4300	4800	19.6	18.7	1
	25 + 25 + 35 + 35 + 60	1.74	1.74	2.43	2.43	4.17		5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	25 + 25 + 35 + 50 + 50	1.69	1.69	2.36	3.38	3.38	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	25 + 25 + 35 + 50 + 60	1.60	1.60	2.24	3.21	3.85	_	5.1	12.5	13.5	1210	4270	4800	19.4	18.6	1
	25 + 35 + 35 + 35 + 35	1.89	2.65	2.65	2.65	2.65	_	5.1	12.5	13.5	1210	4290	4800	19.5	18.7	1
	25 + 35 + 35 + 35 + 50	1.74	2.43	2.43	2.43	3.47	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	25 + 35 + 35 + 35 + 60	1.64	2.30	2.30	2.30	3.95	_	5.1	12.5	13.5	1210	4270	4800	19.4	18.6	1
	25 + 35 + 35 + 50 + 50	1.60	2.24	2.24	3.21	3.21	_	5.1	12.5	13.5	1210	4270	4800	19.4	18.6	1
	35 + 35 + 35 + 35 + 35	2.50	2.50	2.50	2.50	2.50	_	5.1	12.5	13.5	1210	4280	4800	19.5	18.6	1
	35 + 35 + 35 + 35 + 50	2.30	2.30	2.30	2.30	3.29	_	5.1	12.5	13.5	1210	4270	4800	19.4	18.6	1
	20 + 20 + 20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	2.00	2.00	5.5	12.0	13.8	1280	3660	4620	16.7	15.9	1:
	20 + 20 + 20 + 20 + 20 + 25 20 + 20 + 20 + 20 + 20 + 35	2.00	2.00	2.00	2.00	2.00	2.50	5.5	12.5	14.0	1280	3900	4800	17.7	17.0	1
	20 + 20 + 20 + 20 + 20 + 35	1.85 1.67	1.85 1.67	1.85 1.67	1.85 1.67	1.85 1.67	3.24 4.17	5.5 5.5	12.5 12.5	14.0	1280 1280	3890 3860	4800 4800	17.7 17.6	16.9 16.8	1
	20 + 20 + 20 + 20 + 20 + 50	1.56	1.57	1.56	1.57	1.57	4.17	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	10
	20 + 20 + 20 + 20 + 25 + 25	1.92	1.92	1.92	1.92	2.40	2.40	5.5	12.5	14.0	1280	3900	4800	17.7	17.0	1
	20 + 20 + 20 + 20 + 25 + 35	1.79	1.79	1.79	1.79	2.23	3.13	5.5	12.5	14.0	1280	3880	4800	17.7	16.9	1
	20 + 20 + 20 + 20 + 25 + 50	1.61	1.61	1.61	1.61	2.02	4.03	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	1
	20 + 20 + 20 + 20 + 25 + 60	1.52	1.52	1.52	1.52	1.89	4.55	5.5	12.5	14.0	1280	3850	4800	17.5	16.8	1
6	20 + 20 + 20 + 20 + 35 + 35	1.67	1.67	1.67	1.67	2.92	2.92	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	1
room	20 + 20 + 20 + 20 + 35 + 50	1.52	1.52	1.52	1.52	2.65	3.79	5.5	12.5	14.0	1280	3850	4800	17.5	16.8	1
	20 + 20 + 20 + 20 + 35 + 60	1.43	1.43	1.43	1.43	2.50	4.29	5.5	12.5	14.0	1280	3830	4800	17.4	16.7	1
	20 + 20 + 20 + 20 + 50 + 50	1.39	1.39	1.39	1.39	3.47	3.47	5.5	12.5	14.0	1280	3820	4800	17.4	16.6	1
	20 + 20 + 20 + 20 + 50 + 60	1.32	1.32	1.32	1.32	3.29	3.95	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	1:
	20 + 20 + 20 + 25 + 25 + 25	1.85	1.85	1.85	2.31	2.31	2.31	5.5	12.5	14.0	1280	3890	4800	17.7	16.9	1
	20 + 20 + 20 + 25 + 25 + 35	1.72	1.72	1.72	2.16	2.16	3.02	5.5	12.5	14.0	1280	3870	4800	17.6	16.8	10
	20 + 20 + 20 + 25 + 25 + 50	1.56	1.56	1.56	1.95	1.95	3.91	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	10
	20 + 20 + 20 + 25 + 25 + 60	1.47	1.47	1.47	1.84 2.02	1.84 2.82	4.41 2.82	5.5 5.5	12.5 12.5	14.0	1280 1280	3840 3860	4800 4800	17.5 17.6	16.7 16.8	10
	20 + 20 + 20 + 25 + 35 + 35	1.61	1.61	1.61												

						Coolin	g capacity	y (kW)				Power	consump	tion (W)	Stand	ard curre	ent (A)
		Indoor unit		Roo	m coolina	capacity	(kW)		Tot	al capacity	(kW)			, ,			
	(combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20 + 20 + 20 + 25 + 35 + 60	1.39	1.39	1.39	1.74	2.43	4.17	5.5	12.5	14.0	1280	3820	4800	17.4	16.6	15.9
		20 + 20 + 20 + 25 + 50 + 50	1.35	1.35	1.35	1.69	3.38	3.38	5.5	12.5	14.0	1280	3810	4800	17.3	16.6	15.9
		20 + 20 + 20 + 25 + 50 + 60	1.28	1.28	1.28	1.60	3.21	3.85	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		20 + 20 + 20 + 35 + 35 + 35	1.52	1.52	1.52	2.65	2.65	2.65	5.5	12.5	14.0	1280	3850	4800	17.5	16.8	16.1
		20 + 20 + 20 + 35 + 35 + 50	1.39	1.39	1.39	2.43	2.43	3.47	5.5	12.5	14.0	1280	3820	4800	17.4	16.6	15.9
		20 + 20 + 20 + 35 + 35 + 60	1.32	1.32	1.32	2.30	2.30	3.95	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		20 + 20 + 20 + 35 + 50 + 50	1.28	1.28	1.28	2.24	3.21	3.21	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		20 + 20 + 25 + 25 + 25 + 25	1.79	1.79	2.23	2.23	2.23	2.23	5.5	12.5	14.0	1280	3880	4800	17.7	16.9	16.2
		20 + 20 + 25 + 25 + 25 + 35	1.67	1.67	2.08	2.08	2.08	2.92	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	16.1
		20 + 20 + 25 + 25 + 25 + 50	1.52	1.52	1.89	1.89	1.89	3.79	5.5	12.5	14.0	1280	3850	4800	17.5	16.8	16.1
		20 + 20 + 25 + 25 + 25 + 60	1.43	1.43	1.79	1.79	1.79	4.29	5.5	12.5	14.0	1280	3830	4800	17.4	16.7	16.0
		20 + 20 + 25 + 25 + 35 + 35	1.56	1.56	1.95	1.95	2.73	2.73	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	16.1
		20 + 20 + 25 + 25 + 35 + 50	1.43	1.43	1.79	1.79	2.50	3.57	5.5	12.5	14.0	1280	3830	4800	17.4	16.7	16.0
		20 + 20 + 25 + 25 + 35 + 60	1.35	1.35	1.69	1.69	2.36	4.05	5.5	12.5	14.0	1280	3810	4800	17.3	16.6	15.9
		20 + 20 + 25 + 25 + 50 + 50	1.32	1.32	1.64	1.64	3.29	3.29	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		20 + 20 + 25 + 35 + 35 + 35	1.47	1.47	1.84	2.57	2.57	2.57	5.5	12.5	14.0	1280	3840	4800	17.5	16.7	16.0
		20 + 20 + 25 + 35 + 35 + 50	1.35	1.35	1.69	2.36	2.36	3.38	5.5	12.5	14.0	1280	3810	4800	17.3	16.6	15.9
등		20 + 20 + 25 + 35 + 35 + 60	1.28	1.28	1.60	2.24	2.24	3.85	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
ati		20 + 20 + 35 + 35 + 35 + 35 20 + 20 + 35 + 35 + 35 + 50	1.39	1.39 1.28	2.43	2.43	2.43	2.43 3.21	5.5 5.5	12.5 12.5	14.0	1280	3820 3800	4800 4800	17.4 17.3	16.6	15.9
operation	6	20 + 25 + 25 + 25 + 25 + 25	1.72	2.16	2.24	2.24	2.24	2.16	5.5		14.0	1280	3800	4800	17.3	16.5	15.8
0	room		1.72	2.10	2.10	2.10	2.10	2.82	5.5	12.5 12.5	14.0	1280	3860	4800	17.6	16.8 16.8	16.1 16.1
Cooling	1	20 + 25 + 25 + 25 + 25 + 35	1.47	1.84	1.84	1.84	1.84	3.68	5.5	12.5	14.0	1280	3840	4800	17.5	16.7	16.0
ᇹ		20 + 25 + 25 + 25 + 25 + 60	1.39	1.74	1.74	1.74	1.74	4.17	5.5	12.5	14.0	1280	3820	4800	17.5	16.7	15.9
ဒ		20 + 25 + 25 + 25 + 35 + 35	1.52	1.89	1.89	1.89	2.65	2.65	5.5	12.5	14.0	1280	3850	4800	17.4	16.8	16.1
		20 + 25 + 25 + 25 + 35 + 50	1.39	1.74	1.74	1.74	2.43	3.47	5.5	12.5	14.0	1280	3820	4800	17.3	16.6	15.9
		20 + 25 + 25 + 25 + 35 + 60	1.32	1.64	1.64	1.64	2.30	3.95	5.5	12.5	14.0	1280	3800	4800	17.4	16.5	15.8
		20 + 25 + 25 + 25 + 50 + 50	1.28	1.60	1.60	1.60	3.21	3.21	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		20 + 25 + 25 + 35 + 35 + 35	1.43	1.79	1.79	2.50	2.50	2.50	5.5	12.5	14.0	1280	3830	4800	17.4	16.7	16.0
		20 + 25 + 25 + 35 + 35 + 50	1.32	1.64	1.64	2.30	2.30	3.29	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		20 + 25 + 35 + 35 + 35 + 35	1.35	1.69	2.36	2.36	2.36	2.36	5.5	12.5	14.0	1280	3810	4800	17.3	16.6	15.9
		20 + 35 + 35 + 35 + 35 + 35	1.28	2.24	2.24	2.24	2.24	2.24	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		25 + 25 + 25 + 25 + 25 + 25	2.08	2.08	2.08	2.08	2.08	2.08	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	16.1
		25 + 25 + 25 + 25 + 25 + 35	1.95	1.95	1.95	1.95	1.95	2.73	5.5	12.5	14.0	1280	3860	4800	17.6	16.8	16.1
		25 + 25 + 25 + 25 + 25 + 50	1.79	1.79	1.79	1.79	1.79	3.57	5.5	12.5	14.0	1280	3830	4800	17.4	16.7	16.0
		25 + 25 + 25 + 25 + 25 + 60	1.69	1.69	1.69	1.69	1.69	4.05	5.5	12.5	14.0	1280	3810	4800	17.3	16.6	15.9
		25 + 25 + 25 + 25 + 35 + 35	1.84	1.84	1.84	1.84	2.57	2.57	5.5	12.5	14.0	1280	3840	4800	17.5	16.7	16.0
		25 + 25 + 25 + 25 + 35 + 50	1.69	1.69	1.69	1.69	2.36	3.38	5.5	12.5	14.0	1280	3810	4800	17.3	16.6	15.9
		25 + 25 + 25 + 25 + 35 + 60	1.60	1.60	1.60	1.60	2.24	3.85	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		25 + 25 + 25 + 35 + 35 + 35	1.74	1.74	1.74	2.43	2.43	2.43	5.5	12.5	14.0	1280	3820	4800	17.4	16.6	15.9
		25 + 25 + 25 + 35 + 35 + 50	1.60	1.60	1.60	2.24	2.24	3.21	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8
		25 + 25 + 35 + 35 + 35 + 35	1.64	1.64	2.30	2.30	2.30	2.30	5.5	12.5	14.0	1280	3800	4800	17.3	16.5	15.8

SCM125ZM-S Table of Indoor unit combination with other indoor unit

						Heatin	g capacity	/ (kW)				Power	consump	tion (W)	Stand	ard curre	ent (A)
		ndoor unit		Roo	m heating	capacity	(kW)		Tota	al capacity	(kW)	DAI:-	04		0001/	0001/	04014
	C	ombination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20	3.0	_	_	_	_	_	1.5	3.0	3.6	700	1220	1330	5.6	5.4	5.1
		25	3.4	_	_	_	_	_	1.5	3.4	4.1	700	1265	1540	5.8	5.6	5.3
	1	35	4.5	_	_	ı	_	_	1.5	4.5	4.9	700	1650	1840	7.6	7.2	6.9
	room	50	5.8	_	_	I	_	_	1.5	5.8	6.4	700	2120	2410	9.7	9.3	8.9
		60	6.8	_	_	_	_	_	1.5	6.8	7.4	700	2500	2760	11.5	11.0	10.5
		71	8.0	_	_	_	_	_	1.5	8.0	8.1	700	3020	3090	13.9	13.3	12.7
		20 + 20	3.00	3.00	_		_	_	2.1	6.0	7.2	750	1540	1860	7.1	6.8	6.5
		20 + 25	2.84	3.56	_	_	_	_	2.1	6.4	7.7	750	1660	2210	7.6	7.3	7.0
		20 + 35	2.73	4.77	_	_	_	_	2.1	7.5	8.5	750	1990	2520	9.1	8.7	8.4
		20 + 50	2.51	6.29	_	_	_	_	2.1	8.8	10.0	750	2430	3220	11.2	10.7	10.2
		20 + 60	2.45	7.35	_		_	_	2.1	9.8	11.0	750	2840	3620	13.0	12.5	12.0
		20 + 71	2.42	8.58	_	_	_	_	2.1	11.0	11.6	750	2840	3620	13.0	12.5	12.0
		25 + 25	3.40	3.40	_		_		2.1	6.8	8.2	750	1770	2420	8.1	7.8	7.4
		25 + 35	3.29	4.61	_	_	_	_	2.1	7.9	9.0	750	2140	2820	9.8	9.4	9.0
		25 + 50	3.07	6.13	_		_	_	2.1	9.2	10.5	750	2630	3610	12.1	11.6	11.1
	2	25 + 60	3.00	7.20	_	_	_	_	2.1	10.2	11.5	750	3040	3790	14.0	13.4	12.8
	room	25 + 71	2.97	8.43	_		_	_	2.1	11.4	12.1	750	3440	4250	15.8	15.1	14.5
		35 + 35	4.50	4.50	_	_	_	_	2.1	9.0	9.8	750	2520	3210	11.6	11.1	10.6
9		35 + 50	4.24	6.06	_		_	_	2.1	10.3	11.3	750	3040	3710	14.0	13.4	12.8
at		35 + 60	4.16	7.14	_	_	_	_	2.1	11.3	12.3	750	3420	4320	15.7	15.0	14.4
e e		35 + 71	4.13	8.37	_		_		2.1	12.5	12.9	750	4030	4690	18.5	17.7	17.0
ᅙ		50 + 50	5.80	5.80	_	_	_	_	2.1	11.6	12.8	750	3660	4620	16.8	16.1	15.4
Heating operation		50 + 60	5.73	6.87	_		_	_	2.1	12.6	13.8	750	4090	5230	18.8	18.0	17.2
at		50 + 71	5.58	7.92	_	_	_	_	2.1	13.5	13.8	750	4540	5230	20.8	19.9	19.1
운		60 + 60	6.75	6.75	_	_	_	_	2.1	13.5	13.8	750	4540	5230	20.8	19.9	19.1
		60 + 71	6.18	7.32	_	_	_	_	2.1	13.5	13.8	750	4540	5230	20.8	19.9	19.1
		71 + 71	6.75	6.75	_	_	_	_	2.1	13.5	13.8	750	4530	5230	20.8	19.9	19.1
		20 + 20 + 20	3.00	3.00	3.00	_	_	_	3.2	9.0	10.9	780	2270	3350	10.4	10.0	9.6
		20 + 20 + 25	2.89	2.89	3.62		_		3.2	9.4	11.4	780	2400	3550	11.0	10.5	10.1
		20 + 20 + 35	2.80	2.80	4.90	_	_	_	3.2	10.5	12.2	780	2760	3820	12.7	12.1	11.6
		20 + 20 + 50	2.62	2.62	6.56		_		3.2	11.8	13.7	780	3270	4290	15.0	14.4	13.8
		20 + 20 + 60	2.56	2.56	7.68		_	_	3.2	12.8	13.8	780	3690	4350	16.9	16.2	15.5
		20 + 20 + 71	2.43	2.43	8.64		_	_	3.2	13.5	13.8	780	4140	4350	19.0	18.2	17.4
		20 + 25 + 25	2.80	3.50	3.50	_	_	_	3.2	9.8	11.9	780	2560	3720	11.8	11.2	10.8
	3	20 + 25 + 35	2.73	3.41	4.77				3.2	10.9	12.7	780	2970	3990	13.6	13.0	12.5
	room	20 + 25 + 50	2.57	3.21	6.42	_	_	_	3.2	12.2	13.8	780	3480	4350	16.0	15.3	14.6
		20 + 25 + 60	2.51	3.14	7.54		_		3.2	13.2	13.8	780	3990	4350	18.3	17.5	16.8
		20 + 25 + 71	2.33	2.91	8.26	_	_	_	3.2	13.5	13.8	780	4140	4350	19.0	18.2	17.4
		20 + 35 + 35	2.67	4.67	4.67		_	_	3.2	12.0	13.5	780	3460	4220	15.9	15.2	14.6
		20 + 35 + 50	2.53	4.43	6.33	_	_	_	3.2	13.3	13.8	780	3980	4350	18.3	17.5	16.8
		20 + 35 + 60	2.35	4.11	7.04		_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	17.4
		20 + 35 + 71	2.14	3.75	7.61	_	_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	17.4
		20 + 50 + 50	2.25	5.63	5.63	_	_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	17.4

	Indoor unit combination		Roo	m heating	capacity	g capacity (kW)	(KVV)	Tota	l capacity	(kW)		Ctondord			ard curr	
,		A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	24
	20 + 50 + 60	2.08	5.19	6.23	_	_		3.2	13.5	13.8	780	4130	4350	19.0	18.1	17
	20 + 50 + 71 20 + 60 + 60	1.91	4.79	6.80	_		_	4.2	13.5	13.8	780	4130	4350	18.8	18.0	17
	20 + 60 + 71	1.93 1.79	5.79 5.36	5.79				5.2	13.5 13.5	13.8 13.8	780 780	4130 4120	4350 4350	18.6 18.4	17.8 17.6	17
	20 + 71 + 71	1.67	5.92	6.35 5.92				6.2 7.2	13.5	13.8	780	4120	4350	18.2	17.4	16
	25 + 25 + 25	3.40	3.40	3.40			_	3.2	10.2	12.4	780	2760	3880	12.7	12.1	11
	25 + 25 + 35	3.32	3.32	4.65	_	_	_	3.2	11.3	13.2	780	3170	4120	14.6	13.9	13
	25 + 25 + 50	3.15	3.15	6.30	_	_	_	3.2	12.6	13.8	780	3690	4350	16.9	16.2	15
	25 + 25 + 60	3.07	3.07	7.36	_	_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	17
	25 + 25 + 71	2.79	2.79	7.92	_	_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	1
	25 + 35 + 35	3.26	4.57	4.57	_	_	_	3.2	12.4	13.8	780	3780	4350	17.4	16.6	1
	25 + 35 + 50	3.07	4.30	6.14	_	_	_	3.2	13.5	13.8	780	4140	4350	19.0	18.2	1
	25 + 35 + 60	2.81	3.94	6.75	_	_	_	3.2	13.5	13.8	780	4140	4350	19.0	18.2	1
	25 + 35 + 71	2.58	3.61	7.32	_	_	_	4.2	13.5	13.8	780	4130	4350	18.8	18.0	1
	25 + 50 + 50	2.70	5.40	5.40	_	_		3.2	13.5	13.8	780	4130	4350	19.0	18.1	1
	25 + 50 + 60	2.50	5.00	6.00	_	_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	1
	25 + 50 + 71	2.31	4.62	6.57				3.2	13.5	13.8	780	4130	4350	19.0	18.1	1
3	25 + 60 + 60	2.33	5.59	5.59	_	_	_	3.2	13.5	13.8	780	4130	4350	19.0	18.1	1
room	25 + 60 + 71	2.16	5.19	6.14				3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	25 + / + /	2.02	5.74	5.74	_	_	_	3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	35 + 35 + 35	4.50 3.94	4.50	4.50		_		3.2	13.5	13.8	780	4140	4350	19.0	18.2	1
	35 + 35 + 50		3.94	5.63				3.2	13.5	13.8	780	4140	4350	19.0	18.2	1
	35 + 35 + 60 35 + 35 + 71	3.63 3.35	3.63	6.23	_		_	3.2	13.5 13.5	13.8	780	4130	4350 4350	19.0	18.1	1
	35 + 35 + 71 35 + 50 + 50	3.50	3.35 5.00	6.80				3.2	13.5	13.8 13.8	780 780	4130 4130	4350	19.0 19.0	18.1 18.1	1
	35 + 50 + 60	3.50	4.66	5.00 5.59				3.2	13.5	13.8	780	4130	4350	19.0	18.1	1
	35 + 50 + 60	3.26	4.00	6.14	_	_	_	3.2	13.5	13.8	780	4130	4350	18.9	18.1	1
	35 + 60 + 60	3.05	5.23	5.23		_		3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	35 + 60 + 71	2.85	4.88	5.77				3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	35 + 71 + 71	2.67	5.42	5.42	_	_	_	3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	50 + 50 + 50	4.50	4.50	4.50	_	_	_	3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	50 + 50 + 60	4.22	4.22	5.06	_	_	_	3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	50 + 50 + 71	3.95	3.95	5.61	_	_	_	3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	50 + 60 + 60	3.97	4.76	4.76	_	_		3.2	13.5	13.8	780	4120	4350	18.9	18.1	1
	50 + 60 + 71	3.73	4.48	5.30	_	_	_	3.2	13.5	13.8	780	4110	4350	18.9	18.1	1
	60 + 60 + 60	4.50	4.50	4.50	_	_	_	3.2	13.5	13.8	780	4110	4350	18.9	18.1	1
	60 + 60 + 71	4.24	4.24	5.02	_	_	_	3.2	13.5	13.8	780	4110	4350	18.9	18.1	1
	20 + 20 + 20 + 20	3.00	3.00	3.00	3.00	_	_	3.6	12.0	13.8	950	3270	3920	14.9	14.2	1
	20 + 20 + 20 + 25	2.92	2.92	2.92	3.65	_	_	3.6	12.4	13.8	950	3460	3920	15.7	15.1	1
	20 + 20 + 20 + 35	2.84	2.84	2.84	4.97	_	_	3.6	13.5	13.8	950	3770	3920	17.2	16.4	1
	20 + 20 + 20 + 50	2.45	2.45	2.45	6.14	_	_	3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	20 + 20 + 20 + 60	2.25	2.25	2.25	6.75	_	_	3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	20 + 20 + 20 + 71	2.06	2.06	2.06	7.32	_	_	3.6	13.5	13.8	950	3750	3920	16.9	16.2	1
	20 + 20 + 25 + 25	2.84	2.84	3.56	3.56	_	_	3.6	12.8	13.8	950	3510	3920	16.0	15.3	1
	20 + 20 + 25 + 35	2.70	2.70	3.38	4.73			3.6	13.5	13.8	950	3770	3920	17.2	16.4	1
	20 + 20 + 25 + 50	2.35	2.35	2.93	5.87	_	_	3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	20 + 20 + 25 + 60	2.16	2.16	2.70	6.48			3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
	20 + 20 + 25 + 71	1.99	1.99	2.48	7.05	_	_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
	20 + 20 + 35 + 35	2.45	2.45	4.30	4.30			3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	20 + 20 + 35 + 50 20 + 20 + 35 + 60	2.16	2.16	3.78	5.40 6.00		_	3.6	13.5 13.5	13.8 13.8	950 950	3750	3920 3920	17.1 17.1	16.3	1
	20 + 20 + 35 + 71	1.85	2.00 1.85	3.50 3.24	6.57			3.6	13.5	13.8	950	3750 3740	3920	17.1	16.3 16.3	1
	20 + 20 + 50 + 50	1.93	1.93	4.82	4.82			3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 20 + 50 + 60	1.80	1.80	4.50	5.40			3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 20 + 50 + 71	1.68	1.68	4.19	5.95	_		3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 20 + 60 + 60	1.69	1.69	5.06	5.06	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 20 + 60 + 71	1.58	1.58	4.74	5.61	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 20 + 71 + 71	1.48	1.48	5.27	5.27	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 25 + 25 + 25	2.78	3.47	3.47	3.47	_	_	3.6	13.2	13.8	950	3620	3920	16.5	15.8	1
	20 + 25 + 25 + 35	2.57	3.21	3.21	4.50		_	3.6	13.5	13.8	950	3770	3920	17.2	16.4	1
	20 + 25 + 25 + 50	2.25	2.81	2.81	5.63			3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	20 + 25 + 25 + 60	2.08	2.60	2.60	6.23	_	_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
	20 + 25 + 25 + 71	1.91	2.39	2.39	6.80		_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 25 + 35 + 35	2.35	2.93	4.11	4.11	_	_	3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
4	20 + 25 + 35 + 50	2.08	2.60	3.63	5.19		_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
room		1.93	2.41	3.38	5.79	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 25 + 35 + 71	1.79	2.24	3.13	6.35		_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 25 + 50 + 50	1.86	2.33	4.66	4.66	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 25 + 50 + 60	1.74	2.18	4.35	5.23	_		3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 25 + 50 + 71	1.63	2.03	4.07	5.77	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 25 + 60 + 60 20 + 25 + 60 + 71	1.64 1.53	2.05	4.91	4.91 5.45			3.6	13.5 13.5	13.8 13.8	950	3730 3730	3920 3920	17.0 17.0	16.2	1
	20 + 25 + 60 + 71	1.53	1.92 1.80	4.60 5.13	5.45		_	3.6	13.5	13.8	950 950	3730	3920	16.9	16.2 16.2	1
	20 + 35 + 35 + 35	2.16	3.78	3.78	3.78	_	_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
	20 + 35 + 35 + 50	1.93	3.78	3.38	4.82			3.6	13.5	13.8	950	3740	3920	17.1	16.3	1
	20 + 35 + 35 + 60	1.80	3.15	3.15	5.40	_		3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 35 + 35 + 71	1.68	2.93	2.93	5.95	_		3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 35 + 50 + 50	1.74	3.05	4.35	4.35	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	20 + 35 + 50 + 60	1.64	2.86	4.09	4.91	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 35 + 50 + 71	1.53	2.68	3.84	5.45	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 35 + 60 + 60	1.54	2.70	4.63	4.63	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 35 + 60 + 71	1.45	2.54	4.35	5.15	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	1
	20 + 50 + 50 + 50	1.59	3.97	3.97	3.97	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 50 + 50 + 60	1.50	3.75	3.75	4.50	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	1
	20 + 50 + 50 + 71	1.41	3.53	3.53	5.02	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	1
	20 + 50 + 60 + 60	1.42	3.55	4.26	4.26	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	1
	25 + 25 + 25 + 25	3.38	3.38	3.38	3.38	_	_	3.6	13.5	13.8	950	3770	3920	17.2	16.4	1
	25 + 25 + 25 + 35	3.07	3.07	3.07	4.30	_	_	3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	25 + 25 + 25 + 50	2.70	2.70	2.70	5.40	_	_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
	25 + 25 + 25 + 60	2.50	2.50	2.50	6.00	_	_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1
	25 + 25 + 25 + 71	2.31	2.31	2.31	6.57	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	1
	25 + 25 + 35 + 35	2.81	2.81	3.94	3.94	_	_	3.6	13.5	13.8	950	3760	3920	17.1	16.4	1
	25 + 25 + 35 + 50	2.50	2.50	3.50	5.00	_	_	3.6	13.5	13.8	950	3750	3920	17.1	16.3	1

	Indoor unit		-	m haat!		g capacity	y (kW)	-	ol ocasa-'t	(LMA)	Power	consump	tion (W)	Stand	ard curr	ent (A)
(combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
	25 + 25 + 35 + 60	2.33	2.33	3.26	5.59	_		3.6	13.5	13.8	950	3740	3920	17.0	16.3	15.6
	25 + 25 + 35 + 71	2.16 2.25	2.16 2.25	3.03 4.50	6.14 4.50	_	_	3.6 3.6	13.5 13.5	13.8 13.8	950	3740	3920 3920	17.0 17.0	16.3	15.6
	25 + 25 + 50 + 50 25 + 25 + 50 + 60	2.25	2.25	4.50	5.06		_	3.6	13.5	13.8	950 950	3740 3740	3920	17.0	16.3 16.3	15.6 15.6
	25 + 25 + 50 + 71	1.97	1.97	3.95	5.61	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	25 + 25 + 60 + 60	1.99	1.99	4.76	4.76	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	25 + 25 + 60 + 71	1.86	1.86	4.48	5.30	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	25 + 25 + 71 + 71	1.76	1.76	4.99	4.99	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	15.5
	25 + 35 + 35 + 35 25 + 35 + 35 + 50	2.60	3.63	3.63 3.26	3.63 4.66			3.6	13.5 13.5	13.8 13.8	950 950	3750 3740	3920 3920	17.1 17.0	16.3 16.3	15.6 15.6
	25 + 35 + 35 + 60	2.18	3.05	3.05	5.23	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	15.6
	25 + 35 + 35 + 71	2.03	2.85	2.85	5.77	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	25 + 35 + 50 + 50	2.11	2.95	4.22	4.22	_	_	3.6	13.5	13.8	950	3740	3920	17.0	16.3	15.6
١.	25 + 35 + 50 + 60	1.99	2.78	3.97	4.76	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
room	25 + 35 + 50 + 71 25 + 35 + 60 + 60	1.86 1.88	2.61	3.73 4.50	5.30 4.50			3.6	13.5 13.5	13.8 13.8	950 950	3730 3730	3920 3920	17.0 17.0	16.2 16.2	15.6 15.6
	25 + 35 + 60 + 71	1.77	2.47	4.24	5.02	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	15.5
	25 + 50 + 50 + 50	1.93	3.86	3.86	3.86	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	25 + 50 + 50 + 60	1.82	3.65	3.65	4.38	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	15.5
	25 + 50 + 60 + 60	1.73	3.46	4.15	4.15		_	3.6	13.5	13.8	950	3720	3920 3920	16.9	16.2	15.5
	35 + 35 + 35 + 35 35 + 35 + 35 + 50	3.38	3.38	3.38	3.38 4.35			3.6	13.5 13.5	13.8 13.8	950 950	3740 3740	3920	17.0 17.0	16.3 16.3	15.6 15.6
	35 + 35 + 35 + 60	2.86	2.86	2.86	4.91	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	35 + 35 + 35 + 71	2.68	2.68	2.68	5.45	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	35 + 35 + 50 + 50	2.78	2.78	3.97	3.97	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	35 + 35 + 50 + 60	2.63	2.63	3.75	4.50	_	_	3.6	13.5	13.8	950	3730	3920	17.0	16.2	15.6
	35 + 35 + 50 + 71 35 + 35 + 60 + 60	2.47	2.47	3.53 4.26	5.02 4.26			3.6	13.5 13.5	13.8	950 950	3720 3720	3920 3920	16.9 16.9	16.2 16.2	15.5 15.5
	35 + 50 + 50 + 50	2.55	3.65	3.65	3.65	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	15.5
	35 + 50 + 50 + 60	2.42	3.46	3.46	4.15	_	_	3.6	13.5	13.8	950	3720	3920	16.9	16.2	15.5
	20 + 20 + 20 + 20 + 20	2.70	2.70	2.70	2.70	2.70	_	4.0	13.5	13.8	1050	3450	3470	15.7	15.0	14.4
	20 + 20 + 20 + 20 + 25	2.57	2.57	2.57	2.57	3.21	_	4.0	13.5	13.8	1050	3450	3470	15.7	15.0	14.4
	20 + 20 + 20 + 20 + 35 20 + 20 + 20 + 20 + 50	2.35	2.35	2.35	2.35	4.11 5.19	_	4.0	13.5 13.5	13.8 13.8	1050 1050	3440 3430	3470 3470	15.7 15.6	15.0 14.9	14.3
	20 + 20 + 20 + 20 + 60	1.93	1.93	1.93	1.93	5.79	_	4.0	13.5	13.8	1050	3430	3470	15.6	14.9	14.3
	20 + 20 + 20 + 20 + 71	1.79	1.79	1.79	1.79	6.35	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 20 + 20 + 25 + 25	2.45	2.45	2.45	3.07	3.07	_	4.0	13.5	13.8	1050	3450	3470	15.7	15.0	14.4
	20 + 20 + 20 + 25 + 35	2.25	2.25	2.25	2.81	3.94	_	4.0	13.5	13.8	1050	3440	3470	15.7	15.0	14.3
	20 + 20 + 20 + 25 + 50 20 + 20 + 20 + 25 + 60	2.00 1.86	2.00 1.86	2.00 1.86	2.50	5.00 5.59	_	4.0	13.5 13.5	13.8	1050 1050	3430 3420	3470 3470	15.6 15.6	14.9 14.9	14.3
	20 + 20 + 20 + 25 + 71	1.73	1.73	1.73	2.33	6.14		4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 20 + 20 + 35 + 35	2.08	2.08	2.08	3.63	3.63	_	4.0	13.5	13.8	1050	3430	3470	15.6	14.9	14.3
_	20 + 20 + 20 + 35 + 50	1.86	1.86	1.86	3.26	4.66	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
5	20 + 20 + 20 + 35 + 60	1.74	1.74	1.74	3.05	5.23	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
5 5	20 + 20 + 20 + 35 + 71 20 + 20 + 20 + 50 + 50	1.63 1.69	1.63 1.69	1.63	2.85 4.22	5.77 4.22		4.0	13.5 13.5	13.8	1050 1050	3410 3410	3470 3470	15.5 15.5	14.8 14.8	14.2
oberation	20 + 20 + 20 + 50 + 60	1.59	1.59	1.59	3.97	4.76	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 20 + 20 + 60 + 60	1.50	1.50	1.50	4.50	4.50	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14.2
Tealing	20 + 20 + 20 + 60 + 71	1.41	1.41	1.41	4.24	5.02	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	14.1
≧	20 + 20 + 25 + 25 + 25	2.35	2.35	2.93	2.93	2.93	_	4.0	13.5	13.8	1050	3440	3470	15.7	15.0	14.3
	20 + 20 + 25 + 25 + 35 20 + 20 + 25 + 25 + 50	2.16 1.93	2.16 1.93	2.70	2.70 2.41	3.78 4.82		4.0	13.5 13.5	13.8	1050 1050	3440 3430	3470 3470	15.7 15.6	15.0 14.9	14.3
	20 + 20 + 25 + 25 + 60	1.80	1.80	2.25	2.25	5.40	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 20 + 25 + 25 + 71	1.68	1.68	2.10	2.10	5.95	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 20 + 25 + 35 + 35	2.00	2.00	2.50	3.50	3.50	_	4.0	13.5	13.8	1050	3430	3470	15.6	14.9	14.3
	20 + 20 + 25 + 35 + 50 20 + 20 + 25 + 35 + 60	1.80	1.80	2.25	3.15	4.50	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 20 + 25 + 35 + 60	1.69 1.58	1.69 1.58	2.11 1.97	2.95 2.76	5.06 5.61		4.0	13.5 13.5	13.8	1050 1050	3410 3410	3470 3470	15.5 15.5	14.8	14.2
	20 + 20 + 25 + 50 + 50	1.64	1.64	2.05	4.09	4.09	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 20 + 25 + 50 + 60	1.54	1.54	1.93	3.86	4.63	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
5	20 + 20 + 25 + 50 + 71	1.45	1.45	1.81	3.63	5.15	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14.2
room	20 + 20 + 25 + 60 + 60 20 + 20 + 35 + 35 + 35	1.46 1.86	1.46 1.86	1.82	4.38 3.26	4.38 3.26	_	4.0	13.5	13.8	1050	3400 3420	3470 3470	15.5	14.8	14.2
	20 + 20 + 35 + 35 + 35	1.69	1.69	3.26 2.95	2.95	4.22	_	4.0	13.5 13.5	13.8	1050 1050	3410	3470	15.6 15.5	14.9	14.3
	20 + 20 + 35 + 35 + 60	1.59	1.59	2.78	2.78	4.76	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 20 + 35 + 35 + 71	1.49	1.49	2.61	2.61	5.30	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14.2
	20 + 20 + 35 + 50 + 50	1.54	1.54	2.70	3.86	3.86	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 20 + 35 + 50 + 60 20 + 20 + 35 + 60 + 60	1.46 1.38	1.46	2.55	3.65 4.15	4.38 4.15	_	4.0	13.5 13.5	13.8	1050	3400 3390	3470 3470	15.5	14.8	14.2
	20 + 20 + 35 + 60 + 60	1.38	1.38	3.55	3.55	3.55		4.0	13.5	13.8 13.8	1050 1050	3390	3470	15.4 15.4	14.8	14.1
	20 + 25 + 25 + 25 + 25	2.25	2.81	2.81	2.81	2.81	_	4.0	13.5	13.8	1050	3440	3470	15.7	15.0	14.3
	20 + 25 + 25 + 25 + 35	2.08	2.60	2.60	2.60	3.63	_	4.0	13.5	13.8	1050	3430	3470	15.6	14.9	14.3
	20 + 25 + 25 + 25 + 50	1.86	2.33	2.33	2.33	4.66	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 25 + 25 + 25 + 60	1.74	2.18	2.18	2.18	5.23	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 25 + 25 + 25 + 71 20 + 25 + 25 + 35 + 35	1.63 1.93	2.03	2.03	2.03 3.38	5.77 3.38	_	4.0	13.5 13.5	13.8	1050 1050	3410 3430	3470 3470	15.5 15.6	14.8	14.2
	20 + 25 + 25 + 35 + 50	1.74	2.18	2.18	3.05	4.35		4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14.3
	20 + 25 + 25 + 35 + 60	1.64	2.05	2.05	2.86	4.91	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 25 + 25 + 35 + 71	1.53	1.92	1.92	2.68	5.45	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 25 + 25 + 50 + 50	1.59	1.99	1.99	3.97	3.97	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 25 + 25 + 50 + 60 20 + 25 + 25 + 50 + 71	1.50 1.41	1.88	1.88	3.75 3.53	4.50 5.02		4.0	13.5 13.5	13.8	1050	3400 3390	3470 3470	15.5	14.8	14.2
	20 + 25 + 25 + 50 + 71	1.41	1.77	1.77	4.26	4.26	_	4.0	13.5	13.8 13.8	1050 1050	3390	3470	15.4 15.4	14.8	14.1
	20 + 25 + 35 + 35 + 35	1.80	2.25	3.15	3.15	3.15	_	4.0	13.5	13.8	1050	3420	3470	15.4	14.9	14.1
	20 + 25 + 35 + 35 + 50	1.64	2.05	2.86	2.86	4.09	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 25 + 35 + 35 + 60	1.54	1.93	2.70	2.70	4.63	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 25 + 35 + 35 + 71	1.45	1.81	2.54	2.54	5.15		4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14.2
	20 + 25 + 35 + 50 + 50 20 + 25 + 35 + 50 + 60	1.50 1.42	1.88	2.63	3.75	3.75 4.26	_	4.0	13.5	13.8	1050	3400 3390	3470	15.5	14.8	14.2
	20 + 25 + 35 + 50 + 60	1.42	1.78	3.46	3.55 3.46	3.46	_	4.0	13.5 13.5	13.8	1050 1050	3390	3470 3470	15.4 15.4	14.8 14.8	14.1
	20 + 35 + 35 + 35 + 35	1.69	2.95	2.95	2.95	2.95	_	4.0	13.5	13.8	1050	3410	3470	15.4	14.8	14.1
	20 + 35 + 35 + 35 + 50	1.54	2.70	2.70	2.70	3.86	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14.2
	20 + 35 + 35 + 35 + 60	1.46	2.55	2.55	2.55	4.38	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14.2

	Indoor unit		Roo	m heating	Heatin	g capacity (kW)	y (KW)	Tota	al capacity	(kW)		consump			ard curr	
c	combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	24
	20 + 35 + 35 + 50 + 50	1.42	2.49	2.49	3.55	3.55	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	14
	25 + 25 + 25 + 25 + 25 25 + 25 + 25 + 25	2.70	2.70	2.70	2.70	2.70 3.50	_	4.0	13.5 13.5	13.8 13.8	1050 1050	3440 3430	3470 3470	15.7 15.6	15.0 14.9	14
	25 + 25 + 25 + 25 + 50	2.25	2.25	2.25	2.25	4.50	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14
	25 + 25 + 25 + 25 + 60	2.11	2.11	2.11	2.11	5.06	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14
	25 + 25 + 25 + 25 + 71	1.97	1.97	1.97	1.97	5.61	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14
	25 + 25 + 25 + 35 + 35	2.33	2.33	2.33	3.26	3.26	_	4.0	13.5	13.8	1050	3420	3470	15.6	14.9	14
	25 + 25 + 25 + 35 + 50	2.11	2.11	2.11	2.95	4.22	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14
	25 + 25 + 25 + 35 + 60	1.99	1.99	1.99	2.78	4.76	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14
	25 + 25 + 25 + 35 + 71	1.86	1.86	1.86	2.61	5.30	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14
	25 + 25 + 25 + 50 + 50	1.93	1.93	1.93	3.86	3.86	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	14
5	25 + 25 + 25 + 50 + 60	1.82	1.82	1.82	3.65	4.38	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	14
room	25 + 25 + 25 + 60 + 60	1.73	1.73	1.73	4.15	4.15	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	1.
	25 + 25 + 35 + 35 + 35 25 + 25 + 35 + 35 + 50	2.18 1.99	2.18 1.99	3.05 2.78	3.05 2.78	3.05	_	4.0	13.5 13.5	13.8	1050	3420	3470 3470	15.6	14.9	1.
	25 + 25 + 35 + 35 + 60	1.88	1.88	2.63	2.63	3.97 4.50		4.0	13.5	13.8 13.8	1050 1050	3410 3400	3470	15.5 15.5	14.8	1-
	25 + 25 + 35 + 35 + 71	1.77	1.77	2.47	2.47	5.02		4.0	13.5	13.8	1050	3390	3470	15.4	14.8	1
	25 + 25 + 35 + 50 + 50	1.82	1.82	2.55	3.65	3.65	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	1
	25 + 25 + 35 + 50 + 60	1.73	1.73	2.42	3.46	4.15	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	1
	25 + 35 + 35 + 35 + 35	2.05	2.86	2.86	2.86	2.86	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	1
	25 + 35 + 35 + 35 + 50	1.88	2.63	2.63	2.63	3.75	_	4.0	13.5	13.8	1050	3400	3470	15.5	14.8	1.
	25 + 35 + 35 + 35 + 60	1.78	2.49	2.49	2.49	4.26	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	1.
	25 + 35 + 35 + 50 + 50	1.73	2.42	2.42	3.46	3.46	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	1.
	35 + 35 + 35 + 35 + 35	2.70	2.70	2.70	2.70	2.70	_	4.0	13.5	13.8	1050	3410	3470	15.5	14.8	1-
	35 + 35 + 35 + 35 + 50	2.49	2.49	2.49	2.49	3.55	_	4.0	13.5	13.8	1050	3390	3470	15.4	14.8	1-
	20 + 20 + 20 + 20 + 20 + 20	2.25	2.25	2.25	2.25	2.25	2.25	4.5	13.5	13.8	1150	3330	3420	15.2	14.5	1
	20 + 20 + 20 + 20 + 20 + 25	2.16	2.16	2.16	2.16	2.16	2.70	4.5	13.5	13.8	1150	3330	3420	15.2	14.5	1
	20 + 20 + 20 + 20 + 20 + 35	2.00	2.00	2.00	2.00	2.00	3.50	4.5	13.5	13.8	1150	3330	3420	15.2	14.5	1
	20 + 20 + 20 + 20 + 20 + 50	1.80	1.80	1.80	1.80	1.80	4.50	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 20 + 60 20 + 20 + 20 + 20 + 20 + 71	1.69	1.69	1.69	1.69	1.69	5.06	4.5 4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 20 + 71	1.58 2.08	1.58 2.08	1.58 2.08	1.58 2.08	1.58 2.60	5.61 2.60	4.5	13.5 13.5	13.8 13.8	1150	3310	3420 3420	15.1 15.2	14.4 14.5	1
	20 + 20 + 20 + 20 + 25 + 25	1.93	1.93	1.93	1.93	2.60	3.38	4.5	13.5	13.8	1150 1150	3330 3320	3420	15.2	14.5	1
	20 + 20 + 20 + 20 + 25 + 35	1.93	1.93	1.93	1.93	2.41	4.35	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 25 + 60	1.64	1.64	1.64	1.64	2.16	4.91	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 25 + 71	1.53	1.53	1.53	1.53	1.92	5.45	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 35 + 35	1.80	1.80	1.80	1.80	3.15	3.15	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 35 + 50	1.64	1.64	1.64	1.64	2.86	4.09	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 35 + 60	1.54	1.54	1.54	1.54	2.70	4.63	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 35 + 71	1.45	1.45	1.45	1.45	2.54	5.15	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 50 + 50	1.50	1.50	1.50	1.50	3.75	3.75	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 20 + 50 + 60	1.42	1.42	1.42	1.42	3.55	4.26	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 25 + 25	2.00	2.00	2.00	2.50	2.50	2.50	4.5	13.5	13.8	1150	3330	3420	15.2	14.5	1
	20 + 20 + 20 + 25 + 25 + 35	1.86	1.86	1.86	2.33	2.33	3.26	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 25 + 50	1.69	1.69	1.69	2.11	2.11	4.22	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 25 + 60	1.59	1.59	1.59	1.99	1.99	4.76	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 25 + 71	1.49	1.49	1.49	1.86	1.86	5.30 3.05	4.5 4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 35 + 35 20 + 20 + 20 + 25 + 35 + 50	1.74 1.59	1.74 1.59	1.74	2.18 1.99	3.05	3.05	4.5	13.5 13.5	13.8	1150	3320	3420 3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 35 + 60	1.50	1.50	1.59 1.50	1.88	2.78 2.63	4.50	4.5	13.5	13.8 13.8	1150 1150	3310 3310	3420	15.1 15.1	14.4	1
	20 + 20 + 20 + 25 + 50 + 50	1.46	1.46	1.46	1.82	3.65	3.65	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 25 + 50 + 60	1.38	1.38	1.38	1.73	3.46	4.15	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 35 + 35 + 35	1.64	1.64	1.64	2.86	2.86	2.86	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 20 + 35 + 35 + 50	1.50	1.50	1.50	2.63	2.63	3.75	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 35 + 35 + 60	1.42	1.42	1.42	2.49	2.49	4.26	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 20 + 35 + 50 + 50	1.38	1.38	1.38	2.42	3.46	3.46	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 25 + 25 + 25 + 25	1.93	1.93	2.41	2.41	2.41	2.41	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 25 + 25 + 25 + 35	1.80	1.80	2.25	2.25	2.25	3.15	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
6	20 + 20 + 25 + 25 + 25 + 50	1.64	1.64	2.05	2.05	2.05	4.09	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
room	20 + 20 + 25 + 25 + 25 + 60	1.54	1.54	1.93	1.93	1.93	4.63	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 25 + 25 + 25 + 71	1.45	1.45	1.81	1.81	1.81	5.15	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 25 + 25 + 35 + 35	1.69	1.69	2.11	2.11	2.95	2.95	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 20 + 25 + 25 + 35 + 50	1.54 1.46	1.54 1.46	1.93	1.93	2.70	3.86	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 25 + 25 + 35 + 60 20 + 20 + 25 + 25 + 50 + 50	1.46	1.46	1.82 1.78	1.82 1.78	2.55 3.55	4.38 3.55	4.5 4.5	13.5 13.5	13.8 13.8	1150 1150	3310 3310	3420 3420	15.1 15.1	14.4	1
	20 + 20 + 25 + 35 + 35 + 35	1.59	1.59	1.78	2.78	2.78	2.78	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 25 + 35 + 35 + 50	1.46	1.46	1.82	2.55	2.55	3.65	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 25 + 35 + 35 + 60	1.38	1.38	1.73	2.42	2.42	4.15	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 35 + 35 + 35 + 35	1.50	1.50	2.63	2.63	2.63	2.63	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 20 + 35 + 35 + 35 + 50	1.38	1.38	2.42	2.42	2.42	3.46	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 25 + 25	1.86	2.33	2.33	2.33	2.33	2.33	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 25 + 35	1.74	2.18	2.18	2.18	2.18	3.05	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 25 + 50	1.59	1.99	1.99	1.99	1.99	3.97	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 25 + 60	1.50	1.88	1.88	1.88	1.88	4.50	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 25 + 71	1.41	1.77	1.77	1.77	1.77	5.02	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 35 + 35	1.64	2.05	2.05	2.05	2.86	2.86	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 35 + 50	1.50	1.88	1.88	1.88	2.63	3.75	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 35 + 60	1.42	1.78	1.78	1.78	2.49	4.26	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 25 + 25 + 25 + 50 + 50 20 + 25 + 25 + 35 + 35 + 35	1.38 1.54	1.73 1.93	1.73 1.93	1.73 2.70	3.46 2.70	3.46 2.70	4.5 4.5	13.5 13.5	13.8 13.8	1150	3310 3310	3420 3420	15.1 15.1	14.4 14.4	1
	20 + 25 + 25 + 35 + 35 + 35	1.54	1.93	1.93	2.70	2.70	3.55	4.5	13.5	13.8	1150 1150	3310	3420	15.1	14.4	1
	20 + 25 + 35 + 35 + 35 + 35	1.42	1.78	2.55	2.49	2.49	2.55	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	20 + 35 + 35 + 35 + 35 + 35	1.38	2.42	2.55	2.55	2.55	2.55	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 25 + 25	2.25	2.42	2.42	2.42	2.42	2.42	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 25 + 35	2.23	2.23	2.23	2.23	2.23	2.95	4.5	13.5	13.8	1150	3320	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 25 + 50	1.93	1.93	1.93	1.93	1.93	3.86	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 25 + 60	1.82	1.82	1.82	1.82	1.82	4.38	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 35 + 35	1.99	1.99	1.99	1.99	2.78	2.78	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 35 + 50	1.82	1.82	1.82	1.82	2.55	3.65	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 25 + 35 + 60	1.73	1.73	1.73	1.73	2.42	4.15	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 35 + 35 + 35	1.88	1.88	1.88	2.63	2.63	2.63	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 25 + 35 + 35 + 50	1.73	1.73	1.73	2.42	2.42	3.46	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1
	25 + 25 + 35 + 35 + 35 + 35	1.78	1.78	2.49	2.49	2.49	2.49	4.5	13.5	13.8	1150	3310	3420	15.1	14.4	1

	Indoor unit					g capacity	y (kW)			4110	Power	consump	tion (W)	Stand	ard curr	ent (i
	ombination	A room		m cooling C room	D room	(kW) E room	F room	Tota Min.	al capacity Standard	(kW) Max.	Min.	Standard	Max.	220V	230V	24
	20	2.0		-	— —		—	1.8	2.0	2.7	650	780	1100	3.6	3.4	3.
1	25	2.5	_	_	_	_	_	1.8	2.5	3.2	650	1000	1350	4.6	4.4	4.
room	35	3.5	_		_			1.8	3.5	3.7	650	1500	1600	6.9	6.6	6.
	50 60	5.0 6.0	_				_	1.8	5.0 6.0	5.8 6.7	650 650	2150 2720	2500 3000	9.9 12.5	9.4 11.9	9.
	71	7.1	_	_	_	_	_	1.8	7.1	7.2	650	3250	3080	14.9	14.3	13
	20 + 20	2.00	2.00	_	_	_	_	3.0	4.0	5.4	740	960	1460	4.4	4.2	4.
	20 + 25	2.00	2.50	_	_		_	3.0	4.5	5.9	740	1100	1820	5.1	4.8	4.
	20 + 35 20 + 50	2.00	3.50 5.00		_			3.0	5.5 7.0	6.4 8.5	740 740	1500 2290	2020	6.9 10.5	6.6 10.1	9.
	20 + 60	2.00	6.00	_	_	_	_	3.0	8.0	9.4	740	2660	3360	12.2	11.7	11
	20 + 71	2.00	7.10	_	_	_	_	3.0	9.1	9.9	740	3100	3780	14.1	13.5	12
	25 + 25	2.50	2.50					3.0	5.0	6.8	740	1420	2200	6.5	6.2	6
	25 + 35 25 + 50	2.50	3.50 5.00	_	_	_	_	3.0	6.0 7.5	6.9 9.0	740 740	1810 2470	2320 3220	8.3 11.3	7.9 10.8	10
_	25 + 60	2.50	6.00				_	3.0	8.5	9.4	740	2810	3360	12.9	12.3	1
2 room	25 + 71	2.53	7.17	_	_	_	_	3.0	9.7	10.4	740	3350	4020	15.4	14.7	1.
	35 + 35	3.50	3.50	_	_	_	_	3.0	7.0	7.4	740	2290	2820	10.5	10.1	9
	35 + 50	3.50 3.50	5.00 6.00					3.0	8.5 9.5	9.5	740	2810	3620 3990	12.9	12.3	1
	35 + 60 35 + 71	3.50	7.10	_		_		3.0	10.6	10.4 10.9	740 740	3280 3760	4250	15.1 17.1	14.4 16.3	1:
	50 + 50	5.00	5.00	_	_	_	_	3.0	10.0	10.8	740	3520	4050	16.2	15.5	14
	50 + 60	5.00	6.00	_	_	_	_	3.0	11.0	12.0	740	3870	4410	17.8	17.0	1
	50 + 71	4.96	7.04	_	_	_	_	3.0	12.0	12.0	740	4410	4410	20.0	19.2	1
	60 + 60 60 + 71	6.00 5.73	6.00	_				3.0	12.0 12.5	12.0 12.5	740 740	4410	4410 4710	20.2	19.4	1
	71 + 71	6.25	6.25	_	_	_	_	3.0	12.5	12.5	740	4710 4710	4710	21.4	20.5	1
	20 + 20 + 20	2.00	2.00	2.00	_	_	_	3.7	6.0	8.1	880	1530	2560	7.0	6.7	6
	20 + 20 + 25	2.00	2.00	2.50	_	_	_	3.7	6.5	8.6	880	1730	2700	7.9	7.6	7
	20 + 20 + 35	2.00	2.00	3.50	_	_	_	3.7	7.5	9.1	880	2080	3120	9.6	9.1	8
	20 + 20 + 50 20 + 20 + 60	2.00	2.00	5.00 6.00	_	_	_	3.7	9.0	11.2 12.1	880 880	2730 3280	4120 4680	12.5 15.1	12.0 14.4	1
	20 + 20 + 71	2.00	2.00	7.10	_	_		3.7	11.1	12.1	880	3930	4710	18.0	17.3	1
	20 + 25 + 25	2.00	2.50	2.50	_	_	_	3.7	7.0	9.1	880	1940	3210	8.9	8.5	1
	20 + 25 + 35	2.00	2.50	3.50	_			3.7	8.0	9.6	880	2440	3450	11.2	10.7	1
	20 + 25 + 50	2.00	2.50	5.00 6.00	_	_	_	3.7	9.5	11.7	880	3130	4480	14.4	13.7	1
	20 + 25 + 60 20 + 25 + 71	2.00	2.50	7.10	_		_	3.7	10.5 11.6	12.6 12.6	880 880	3770 4210	4800 4800	17.3 19.1	16.6 18.3	1
	20 + 35 + 35	2.00	3.50	3.50	_	_	_	3.7	9.0	10.1	880	2920	3850	13.4	12.8	1
	20 + 35 + 50	2.00	3.50	5.00	_	_		3.7	10.5	12.0	880	3770	4450	17.3	16.6	1
	20 + 35 + 60	2.00	3.50	6.00				3.7	11.5	12.6	880	4150	4800	19.1	18.2	1
	20 + 35 + 71	1.98 2.00	3.47 5.00	7.04 5.00	_	_	_	4.7 3.7	12.5 12.0	12.6	880	4670	4800	21.2	20.3	1
	20 + 50 + 50 20 + 50 + 60	1.92	4.81	5.77	_			3.7	12.5	12.6 12.6	880 880	4440 4670	4800 4800	20.4	19.5 20.5	1
	20 + 50 + 71	1.77	4.43	6.29	_	_	_	3.7	12.5	12.6	881	4670	4800	21.4	20.5	1
3 room	20 + 60 + 60	1.79	5.36	5.36	_	_	_	3.7	12.5	12.6	881	4670	4800	21.4	20.5	1
	20 + 60 + 71	1.66	4.97	5.88				3.7	12.5	12.6	881	4670	4800	21.4	20.5	1
	20 + 71 + 71 25 + 25 + 25	1.54 2.50	5.48 2.50	5.48 2.50	_			3.7	7.5	12.6 9.6	881 880	4660 2130	4800 3640	21.4 9.8	20.5 9.4	1 9
	25 + 25 + 35	2.50	2.50	3.50	_		_	3.7	8.5	10.1	880	2650	3900	12.2	11.6	1
	25 + 25 + 50	2.50	2.50	5.00	_	_	_	3.7	10.0	12.6	880	3420	4800	15.7	15.0	1
	25 + 25 + 60	2.50	2.50	6.00	_	_	_	3.7	11.0	12.6	880	3910	4800	18.0	17.2	1
	25 + 25 + 71	2.58	2.58 3.50	7.33	_	_	_	3.7	12.5	12.6	880	4670	4800	21.2	20.3	1
	25 + 35 + 35 25 + 35 + 50	2.50	3.50	5.00				3.7	9.5 11.0	10.4 12.6	880 880	3130 3910	3910 4800	14.4 18.0	13.7 17.2	1
	25 + 35 + 60	2.50	3.50	6.00	_	_	_	3.7	12.0	12.6	880	4440	4800	20.4	19.5	1
	25 + 35 + 71	2.39	3.34	6.77	_	_	_	3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	25 + 50 + 50	2.50	5.00	5.00	_	_	_	3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	25 + 50 + 60 25 + 50 + 71	2.31	4.63 4.28	5.56 6.08				3.7	12.5 12.5	12.6 12.6	880 880	4670 4670	4800 4800	21.4	20.5	1
	25 + 60 + 60	2.14	5.17	5.17				3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	25 + 60 + 71	2.00	4.81	5.69	_	_	_	3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	25 + 71 + 71	1.87	5.31	5.31		_		3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	35 + 35 + 35 35 + 35 + 50	3.50 3.50	3.50 3.50	3.50 5.00	_	_	_	3.7	10.5 12.0	10.9 12.6	880 880	3770 4440	4180 4800	17.3 20.4	16.6 19.5	1
	35 + 35 + 60	3.37	3.37	5.77	_	_	_	3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	35 + 35 + 71	3.10	3.10	6.29	_	_	_	3.7	12.5	12.6	880	4660	4800	21.2	20.3	1
	35 + 50 + 50	3.24	4.63	4.63	_	_	_	3.7	12.5	12.6	880	4670	4800	21.4	20.5	1
	35 + 50 + 60 35 + 50 + 71	3.02 2.80	4.31	5.17 5.69				3.7	12.5 12.5	12.6 12.6	880 880	4660 4660	4800 4800	21.4	20.5	1
	35 + 60 + 60	2.82	4.84	4.84	_	_	_	3.7	12.5	12.6	880	4660	4800	21.4	20.5	1
	35 + 60 + 71	2.64	4.52	5.35	_	_	_	3.7	12.5	12.6	880	4660	4800	21.4	20.5	1
	35 + 71 + 71	2.47	5.01	5.01	_	_	_	3.7	12.5	12.6	880	4650	4800	21.3	20.4	1
	50 + 50 + 50	4.17	4.17	4.17 4.69	_	_	_	3.7	12.5	12.6	880	4660 4660	4800	21.4	20.5	1
	50 + 50 + 60 50 + 50 + 71	3.91 3.65	3.91 3.65	5.19			_	3.7	12.5 12.5	12.6 12.6	880 880	4650	4800 4800	21.4	20.5	1
	50 + 60 + 60	3.68	4.41	4.41	_	_	_	3.7	12.5	12.6	880	4650	4800	21.3	20.4	1
	50 + 60 + 71	3.45	4.14	4.90	_	_	_	3.7	12.5	12.6	880	4650	4800	21.3	20.4	1
	60 + 60 + 60	4.17	4.17	4.17	_	_	_	3.7	12.5	12.6	880	4650	4800	21.3	20.4	1
	60 + 60 + 71 20 + 20 + 20 + 20	3.93 2.00	3.93 2.00	4.65 2.00	2.00	_	_	3.7 4.4	12.5 8.0	12.6	880 1100	4650 2110	4800 3680	21.3 9.6	9.2	1 8
	20 + 20 + 20 + 25	2.00	2.00	2.00	2.50	_	_	4.4	8.5	11.3	1100	2390	3890	10.9	10.4	1
	20 + 20 + 20 + 35	2.00	2.00	2.00	3.50	_	_	4.4	9.5	11.8	1100	2900	4350	13.2	12.6	1
	20 + 20 + 20 + 50	2.00	2.00	2.00	5.00	_	_	4.4	11.0	12.8	1100	3580	4800	16.3	15.6	1
	20 + 20 + 20 + 60	2.00	2.00	2.00	6.00	_	_	4.4	12.0	12.8	1100	4100	4800	18.7	17.8	1
4	20 + 20 + 20 + 71	1.91	1.91	1.91	6.77	_	_	4.4	12.5	12.8	1100	4730	4800	21.3	20.4	1
room	20 + 20 + 25 + 25 20 + 20 + 25 + 35	2.00	2.00	2.50 2.50	2.50 3.50			4.4	9.0	11.8 12.3	1100	2600 3210	4410 4780	11.8 14.6	11.3	1
	20 + 20 + 25 + 50	2.00	2.00	2.50	5.00			4.4	11.5	12.8	1100	3830	4800	17.4	16.7	1
	20 + 20 + 25 + 60	2.00	2.00	2.50	6.00	_	_	4.4	12.5	12.8	1100	4740	4800	21.6	20.6	1
	20 + 20 + 25 + 71	1.84	1.84	2.30	6.53	_	_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	1
	20 + 20 + 35 + 35	2.00	2.00	3.50	3.50	_		4.4	11.0	12.8	1100	3580	4800	16.3	15.6	1-1-

	Indoor unit					g capacity	/ (kW)			(1.140)	Power	consump	tion (W)	Stand	ard curr	ent (A)
	combination	A room	Room B room	m cooling C room	D room	(kW) E room	F room	Tota Min.	I capacity Standard	(kW) Max.	Min.	Standard	Max.	220V	230V	240V
	20 + 20 + 35 + 60	1.85	1.85	3.24	5.56	_	-	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	20 + 20 + 35 + 71	1.71	1.71	3.00	6.08	_	_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	20 + 20 + 50 + 50	1.79	1.79	4.46	4.46			4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	20 + 20 + 50 + 60 20 + 20 + 50 + 71	1.67 1.55	1.67 1.55	4.17 3.88	5.00 5.51		_	4.4 4.4	12.5 12.5	12.8 12.8	1100	4730 4720	4800 4800	21.5 21.5	20.6	19.7 19.7
	20 + 20 + 60 + 60	1.56	1.56	4.69	4.69	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 20 + 60 + 71	1.46	1.46	4.39	5.19		_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 20 + 71 + 71	1.37 2.00	1.37 2.50	4.88	4.88 2.50		_	4.4	12.5 9.5	12.8	1100	4710	4800 4800	21.4	20.5	19.6
	20 + 25 + 25 + 25 20 + 25 + 25 + 35	2.00	2.50	2.50 2.50	3.50		_	4.4	10.5	12.8 12.8	1100	2900 3440	4800	13.2 15.7	12.6 15.0	12.1
	20 + 25 + 25 + 50	2.00	2.50	2.50	5.00	_	_	4.4	12.0	12.8	1100	4100	4800	18.7	17.8	17.1
	20 + 25 + 25 + 60	1.92	2.40	2.40	5.77	_	_	4.4	12.5	12.8	1100	4740	4800	21.6	20.6	19.8
	20 + 25 + 25 + 71 20 + 25 + 35 + 35	1.82 2.00	2.26	2.26 3.50	6.16 3.50			4.4 4.4	12.5 11.5	12.8 12.8	1100	4730 3830	4800 4800	21.5 17.4	20.6 16.7	19.7 16.0
	20 + 25 + 35 + 50	1.92	2.40	3.37	4.81		_	4.4	12.5	12.8	1100	4740	4800	21.6	20.6	19.8
	20 + 25 + 35 + 60	1.79	2.23	3.13	5.36	_	_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	20 + 25 + 35 + 71	1.66	2.07	2.90	5.88	_	_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	20 + 25 + 50 + 50	1.72 1.61	2.16	4.31	4.31 4.84	_	_	4.4 4.4	12.5 12.5	12.8 12.8	1100	4730	4800 4800	21.5 21.5	20.6	19.7
	20 + 25 + 50 + 60 20 + 25 + 50 + 71	1.51	1.88	3.77	5.35			4.4	12.5	12.8	1100	4720 4720	4800	21.5	20.5	19.7 19.7
	20 + 25 + 60 + 60	1.52	1.89	4.55	4.55	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 25 + 60 + 71	1.42	1.78	4.26	5.04	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 25 + 71 + 71	1.34	1.67	4.75	4.75		_	4.4	12.5	12.8	1100	4700	4800	21.4	20.5	19.6
	20 + 35 + 35 + 35 20 + 35 + 35 + 50	2.00 1.79	3.50 3.13	3.50 3.13	3.50 4.46			4.4 4.4	12.5 12.5	12.8 12.8	1100	4740 4730	4800 4800	21.6	20.6	19.8 19.7
	20 + 35 + 35 + 60	1.67	2.92	2.92	5.00		_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	20 + 35 + 35 + 71	1.55	2.72	2.72	5.51			4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 35 + 50 + 50	1.61	2.82	4.03	4.03	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 35 + 50 + 60 20 + 35 + 50 + 71	1.52 1.42	2.65	3.79 3.55	4.55 5.04			4.4	12.5 12.5	12.8 12.8	1100	4720 4720	4800 4800	21.5 21.5	20.5	19.7 19.7
	20 + 35 + 60 + 60	1.43	2.49	4.29	4.29		_	4.4	12.5	12.8	1100	4720	4800	21.4	20.5	19.7
	20 + 35 + 60 + 71	1.34	2.35	4.03	4.77	_	_	4.4	12.5	12.8	1100	4710	4800	21.4	20.5	19.6
	20 + 50 + 50 + 50	1.47	3.68	3.68	3.68			4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	20 + 50 + 50 + 60 20 + 50 + 50 + 71	1.39	3.47	3.47 3.27	4.17 4.65		_	4.4	12.5 12.5	12.8 12.8	1100 1100	4710 4700	4800 4800	21.4	20.5	19.6 19.6
	20 + 50 + 60 + 60	1.32	3.29	3.95	3.95	_	_	4.4	12.5	12.8	1100	4700	4800	21.4	20.5	19.6
roon	25 + 25 + 25 + 25	2.50	2.50	2.50	2.50	_	_	4.4	10.0	12.8	1100	3210	4800	14.6	14.0	13.4
	25 + 25 + 25 + 35	2.50	2.50	2.50	3.50	_	_	4.4	11.0	12.8	1100	3580	4800	16.3	15.6	14.9
	25 + 25 + 25 + 50 25 + 25 + 25 + 60	2.50 2.31	2.50	2.50	5.00 5.56			4.4	12.5 12.5	12.8 12.8	1100	4740 4730	4800 4800	21.6	20.6	19.8 19.7
	25 + 25 + 25 + 71	2.14	2.14	2.14	6.08			4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
	25 + 25 + 35 + 35	2.50	2.50	3.50	3.50	_	_	4.4	12.0	12.8	1100	4100	4800	18.7	17.8	17.1
_ ا	25 + 25 + 35 + 50	2.31	2.31	3.24	4.63	_	_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
₽	25 + 25 + 35 + 60 25 + 25 + 35 + 71	2.16	2.16	3.02 2.80	5.17 5.69		_	4.4 4.4	12.5 12.5	12.8 12.8	1100	4730 4720	4800 4800	21.5	20.6	19.7 19.7
era	25 + 25 + 50 + 50	2.08	2.08	4.17	4.17	_	_	4.4	12.5	12.8	1100	4730	4800	21.5	20.6	19.7
Cooling operation	25 + 25 + 50 + 60	1.95	1.95	3.91	4.69	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
<u>=</u>	25 + 25 + 50 + 71	1.83	1.83	3.65	5.19		_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
8	25 + 25 + 60 + 60 25 + 25 + 60 + 71	1.84	1.84 1.73	4.41 4.14	4.41 4.90		_	4.4 4.4	12.5 12.5	12.8 12.8	1100	4720 4710	4800 4800	21.5 21.4	20.5	19.7 19.6
٥	25 + 25 + 71 + 71	1.63	1.63	4.62	4.62	_	_	4.4	12.5	12.8	1100	4700	4800	21.4	20.5	19.6
	25 + 35 + 35 + 35	2.40	3.37	3.37	3.37	_	_	4.4	12.5	12.8	1100	4740	4800	21.6	20.6	19.8
	25 + 35 + 35 + 50 25 + 35 + 35 + 60	2.16	3.02	3.02	4.31			4.4	12.5 12.5	12.8	1100	4730	4800 4800	21.5 21.5	20.6	19.7
	25 + 35 + 35 + 60	2.02 1.88	2.82	2.82	4.84 5.35			4.4	12.5	12.8 12.8	1100	4720 4720	4800	21.5	20.5	19.7 19.7
	25 + 35 + 50 + 50	1.95	2.73	3.91	3.91	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	25 + 35 + 50 + 60	1.84	2.57	3.68	4.41		_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	25 + 35 + 50 + 71 25 + 35 + 60 + 60	1.73 1.74	2.42	3.45 4.17	4.90 4.17	_		4.4 4.4	12.5 12.5	12.8 12.8	1100	4710 4710	4800 4800	21.4	20.5	19.6 19.6
	25 + 35 + 60 + 71	1.64	2.29	3.93	4.65	_	_	4.4	12.5	12.8	1100	4700	4800	21.4	20.5	19.6
	25 + 50 + 50 + 50	1.79	3.57	3.57	3.57			4.4	12.5	12.8	1100	4710	4800	21.4	20.5	19.6
	25 + 50 + 50 + 60	1.69	3.38	3.38	4.05	_	_	4.4	12.5	12.8	1100	4710	4800	21.4	20.5	19.6
	25 + 50 + 60 + 60 35 + 35 + 35 + 35	1.60 3.13	3.21 3.13	3.85 3.13	3.85 3.13			4.4	12.5 12.5	12.8 12.8	1100	4700 4730	4800 4800	21.4	20.5	19.6 19.7
	35 + 35 + 35 + 50	2.82	2.82	2.82	4.03		_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	35 + 35 + 35 + 60	2.65	2.65	2.65	4.55	_	_	4.4	12.5	12.8	1100	4720	4800	21.5	20.5	19.7
	35 + 35 + 35 + 71	2.49	2.49	2.49	5.04			4.4	12.5	12.8	1100	4710	4800	21.4	20.5	19.6
	35 + 35 + 50 + 50 35 + 35 + 50 + 60	2.57	2.57	3.68	3.68 4.17	_	_	4.4 4.4	12.5 12.5	12.8 12.8	1100	4720 4710	4800 4800	21.5	20.5	19.7 19.6
	35 + 35 + 50 + 71	2.43	2.43	3.27	4.65	_	_	4.4	12.5	12.8	1100	4700	4800	21.4	20.5	19.6
	35 + 35 + 60 + 60	2.30	2.30	3.95	3.95		_	4.4	12.5	12.8	1100	4700	4800	21.4	20.5	19.6
	35 + 50 + 50 + 50	2.36	3.38	3.38	3.38	_	_	4.4	12.5	12.8	1100	4710	4800	21.4	20.5	19.6
	35 + 50 + 50 + 60 20 + 20 + 20 + 20 + 20	2.24	3.21 2.00	3.21 2.00	3.85 2.00	2.00		4.4 5.1	12.5 10.0	12.8 13.3	1100 1210	4700 2950	4800 4800	21.4 13.4	20.5 12.8	19.6 12.3
	20 + 20 + 20 + 20 + 25	2.00	2.00	2.00	2.00	2.50		5.1	10.5	13.3	1210	3200	4800	14.6	13.9	13.3
	20 + 20 + 20 + 20 + 35	2.00	2.00	2.00	2.00	3.50	_	5.1	11.5	13.3	1210	3710	4800	16.9	16.1	15.5
	20 + 20 + 20 + 20 + 50	1.92	1.92	1.92	1.92	4.81		5.1	12.5	13.3	1210	4430	4800	20.2	19.3	18.5
	20 + 20 + 20 + 20 + 60 20 + 20 + 20 + 20 + 71	1.79 1.66	1.79 1.66	1.79 1.66	1.79 1.66	5.36 5.88	_	5.1 5.1	12.5 12.5	13.3 13.3	1210 1210	4420 4410	4800 4800	20.1	19.2 19.2	18.4 18.4
	20 + 20 + 20 + 25 + 25	2.00	2.00	2.00	2.50	2.50	_	5.1	11.0	13.3	1210	3400	4800	15.5	14.8	14.2
	20 + 20 + 20 + 25 + 35	2.00	2.00	2.00	2.50	3.50	_	5.1	12.0	13.3	1210	4090	4800	18.6	17.8	17.1
	20 + 20 + 20 + 25 + 50	1.85	1.85	1.85	2.31	4.63	_	5.1	12.5	13.3	1210	4430	4800	20.2	19.3	18.5
5 roon	20 + 20 + 20 + 25 + 60 20 + 20 + 20 + 25 + 71	1.72 1.60	1.72 1.60	1.72 1.60	2.16	5.17 5.69	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4420 4410	4800 4800	20.1	19.2 19.2	18.4 18.4
	20 + 20 + 20 + 25 + 71	1.92	1.92	1.92	3.37	3.37	_	5.1	12.5	13.3	1210	4430	4800	20.1	19.2	18.5
	20 + 20 + 20 + 35 + 50	1.72	1.72	1.72	3.02	4.31	_	5.1	12.5	13.3	1210	4420	4800	20.1	19.2	18.4
	20 + 20 + 20 + 35 + 60	1.61	1.61	1.61	2.82	4.84	_	5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
	20 + 20 + 20 + 35 + 71 20 + 20 + 20 + 50 + 50	1.51 1.56	1.51 1.56	1.51	2.64 3.91	5.35 3.91	_	5.1 5.1	12.5	13.3	1210	4400 4410	4800	20.0	19.1	18.4 18.4
	20 + 20 + 20 + 50 + 50	1.56	1.56	1.56 1.47	3.91	4.41	_	5.1	12.5 12.5	13.3	1210 1210	4410	4800 4800	20.1	19.2 19.1	18.4
	20 + 20 + 20 + 50 + 71	1.38	1.38	1.38	3.45	4.90	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 20 + 20 + 60 + 60	1.39	1.39	1.39	4.17	4.17	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 20 + 20 + 60 + 71	1.31	1.31	1.31	3.93	4.65	_	5.1	12.5	13.3	1210	4380	4800	19.9	19.1	18.3

	Indoor unit					g capacity	y (kW)			(1.140)	Power	consump	tion (W)	Stand	lard curre	ent (A)
	combination	A room	B room	m cooling C room	D room	(kW) E room	F room	Min.	al capacity Standard	· ,	Min.	Standard	Max.	220V	230V	240V
	20 + 20 + 25 + 25 + 25	2.00	2.00	2.50	2.50	2.50	— —	5.1	11.5	13.3	1210	3710	4800	16.9	16.1	15.5
	20 + 20 + 25 + 25 + 35	2.00	2.00	2.50	2.50	3.50	_	5.1	12.5	13.3	1210	4440	4800	20.2	19.3	18.5
	20 + 20 + 25 + 25 + 50 20 + 20 + 25 + 25 + 60	1.79	1.79 1.67	2.23	2.23	4.46 5.00	_	5.1 5.1	12.5 12.5	13.3 13.3	1210 1210	4420 4410	4800 4800	20.1	19.2 19.2	18.4 18.4
	20 + 20 + 25 + 25 + 71	1.55	1.55	1.94	1.94	5.51		5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
	20 + 20 + 25 + 35 + 35	1.85	1.85	2.31	3.24	3.24	_	5.1	12.5	13.3	1210	4430	4800	20.2	19.3	18.5
	20 + 20 + 25 + 35 + 50	1.67	1.67	2.08	2.92	4.17		5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
	20 + 20 + 25 + 35 + 60 20 + 20 + 25 + 35 + 71	1.56 1.46	1.56 1.46	1.95 1.83	2.73 2.56	4.69 5.19	_	5.1 5.1	12.5 12.5	13.3 13.3	1210 1210	4410 4400	4800 4800	20.1	19.2 19.1	18.4 18.4
	20 + 20 + 25 + 50 + 50	1.52	1.52	1.89	3.79	3.79	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	20 + 20 + 25 + 50 + 60	1.43	1.43	1.79	3.57	4.29	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 20 + 25 + 50 + 71	1.34	1.34	1.68	3.36	4.77	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 20 + 25 + 60 + 60 20 + 20 + 35 + 35 + 35	1.35 1.72	1.35 1.72	1.69 3.02	4.05 3.02	4.05 3.02		5.1 5.1	12.5 12.5	13.3 13.3	1210 1210	4390 4420	4800 4800	20.0	19.1 19.2	18.3
	20 + 20 + 35 + 35 + 50	1.56	1.56	2.73	2.73	3.91	_	5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
	20 + 20 + 35 + 35 + 60	1.47	1.47	2.57	2.57	4.41	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	20 + 20 + 35 + 35 + 71	1.38	1.38	2.42	2.42	4.90	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 20 + 35 + 50 + 50 20 + 20 + 35 + 50 + 60	1.43 1.35	1.43	2.50	3.57 3.38	3.57 4.05	_	5.1 5.1	12.5	13.3	1210 1210	4390 4390	4800 4800	20.0	19.1 19.1	18.3
	20 + 20 + 35 + 60 + 60	1.28	1.33	2.30	3.85	3.85		5.1	12.5 12.5	13.3	1210	4380	4800	19.9	19.1	18.3
	20 + 20 + 50 + 50 + 50	1.32	1.32	3.29	3.29	3.29	_	5.1	12.5	13.3	1210	4380	4800	19.9	19.1	18.3
	20 + 25 + 25 + 25 + 25	2.00	2.50	2.50	2.50	2.50	_	5.1	12.0	13.3	1210	4090	4800	18.6	17.8	17.1
	20 + 25 + 25 + 25 + 35	1.92	2.40	2.40	2.40	3.37	_	5.1	12.5	13.3	1210	4430	4800	20.2	19.3	18.5
	20 + 25 + 25 + 25 + 50 20 + 25 + 25 + 25 + 60	1.72 1.61	2.16	2.16	2.16 2.02	4.31 4.84	_	5.1 5.1	12.5 12.5	13.3 13.3	1210 1210	4420 4410	4800 4800	20.1	19.2 19.2	18.4
	20 + 25 + 25 + 25 + 71	1.51	1.88	1.88	1.88	5.35	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	20 + 25 + 25 + 35 + 35	1.79	2.23	2.23	3.13	3.13	_	5.1	12.5	13.3	1210	4420	4800	20.1	19.2	18.4
	20 + 25 + 25 + 35 + 50	1.61	2.02	2.02	2.82	4.03	_	5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
	20 + 25 + 25 + 35 + 60 20 + 25 + 25 + 35 + 71	1.52 1.42	1.89	1.89	2.65	4.55 5.04	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4400 4390	4800 4800	20.0	19.1 19.1	18.4
	20 + 25 + 25 + 35 + 71	1.42	1.78	1.78	3.68	3.68	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	20 + 25 + 25 + 50 + 60	1.39	1.74	1.74	3.47	4.17	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 25 + 25 + 50 + 71	1.31	1.64	1.64	3.27	4.65	_	5.1	12.5	13.3	1210	4380	4800	19.9	19.1	18.3
5 room	20 + 25 + 25 + 60 + 60	1.32	1.64 2.08	1.64 2.92	3.95 2.92	3.95 2.92	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4380 4410	4800 4800	19.9 20.1	19.1 19.2	18.3
liooiii	20 + 25 + 35 + 35 + 50	1.52	1.89	2.65	2.65	3.79		5.1	12.5	13.3	1210	4400	4800	20.1	19.1	18.4
	20 + 25 + 35 + 35 + 60	1.43	1.79	2.50	2.50	4.29	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 25 + 35 + 35 + 71	1.34	1.68	2.35	2.35	4.77	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	20 + 25 + 35 + 50 + 50 20 + 25 + 35 + 50 + 60	1.39	1.74 1.64	2.43	3.47	3.47	_	5.1	12.5 12.5	13.3	1210 1210	4390	4800	20.0 19.9	19.1	18.3
	20 + 25 + 35 + 50 + 60	1.32	1.60	2.30 3.21	3.29	3.95 3.21	_	5.1 5.1	12.5	13.3	1210	4380 4380	4800 4800	19.9	19.1 19.1	18.3
	20 + 35 + 35 + 35 + 35	1.56	2.73	2.73	2.73	2.73	_	5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
_	20 + 35 + 35 + 35 + 50	1.43	2.50	2.50	2.50	3.57	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
operation	20 + 35 + 35 + 35 + 60	1.35	2.36	2.36	2.36	4.05	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
era	20 + 35 + 35 + 50 + 50 25 + 25 + 25 + 25 + 25	1.32 2.50	2.30	2.30	3.29 2.50	3.29 2.50	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4380 4440	4800 4800	19.9 20.2	19.1 19.3	18.3
ğ	25 + 25 + 25 + 25 + 35	2.31	2.31	2.31	2.31	3.24		5.1	12.5	13.3	1210	4430	4800	20.2	19.3	18.5
Cooling	25 + 25 + 25 + 25 + 50	2.08	2.08	2.08	2.08	4.17	_	5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
<u></u>	25 + 25 + 25 + 25 + 60	1.95	1.95	1.95	1.95	4.69		5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
۵	25 + 25 + 25 + 35 + 35 25 + 25 + 25 + 35 + 50	2.16 1.95	2.16 1.95	2.16 1.95	3.02 2.73	3.02 3.91	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4420 4410	4800 4800	20.1	19.2 19.2	18.4
	25 + 25 + 25 + 35 + 60	1.84	1.84	1.84	2.57	4.41	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	25 + 25 + 25 + 35 + 71	1.73	1.73	1.73	2.42	4.90	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	25 + 25 + 25 + 50 + 50	1.79	1.79	1.79	3.57	3.57	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	25 + 25 + 25 + 50 + 60 25 + 25 + 25 + 60 + 60	1.69 1.60	1.69 1.60	1.69 1.60	3.38 3.85	4.05 3.85	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4390 4380	4800 4800	20.0 19.9	19.1 19.1	18.3
	25 + 25 + 35 + 35 + 35	2.02	2.02	2.82	2.82	2.82	_	5.1	12.5	13.3	1210	4410	4800	20.1	19.2	18.4
	25 + 25 + 35 + 35 + 50	1.84	1.84	2.57	2.57	3.68	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	25 + 25 + 35 + 35 + 60	1.74	1.74	2.43	2.43	4.17		5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	25 + 25 + 35 + 35 + 71 25 + 25 + 35 + 50 + 50	1.64 1.69	1.64 1.69	2.29	2.29 3.38	4.65 3.38	_	5.1 5.1	12.5 12.5	13.3	1210 1210	4380 4390	4800 4800	19.9 20.0	19.1 19.1	18.3
	25 + 25 + 35 + 50 + 60	1.60	1.60	2.30	3.21	3.85	_	5.1	12.5	13.3	1210	4380	4800	19.9	19.1	18.3
	25 + 35 + 35 + 35 + 35	1.89	2.65	2.65	2.65	2.65	_	5.1	12.5	13.3	1210	4400	4800	20.0	19.1	18.4
	25 + 35 + 35 + 35 + 50	1.74	2.43	2.43	2.43	3.47	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	25 + 35 + 35 + 35 + 60 25 + 35 + 35 + 50 + 50	1.64	2.30	2.30	2.30 3.21	3.95 3.21		5.1 5.1	12.5 12.5	13.3	1210 1210	4380 4380	4800 4800	19.9 19.9	19.1 19.1	18.3
	35 + 35 + 35 + 35 + 35	2.50	2.50	2.50	2.50	2.50	_	5.1	12.5	13.3	1210	4390	4800	20.0	19.1	18.3
	35 + 35 + 35 + 35 + 50	2.30	2.30	2.30	2.30	3.29	_	5.1	12.5	13.3	1210	4380	4800	19.9	19.1	18.3
	20 + 20 + 20 + 20 + 20 + 20	2.00	2.00	2.00	2.00	2.00	2.00	5.5	12.0	13.6	1280	3750	4620	17.1	16.3	15.6
	20 + 20 + 20 + 20 + 20 + 25 20 + 20 + 20 + 20 + 20 + 35	2.00 1.85	2.00 1.85	2.00 1.85	2.00 1.85	2.00 1.85	2.50 3.24	5.5 5.5	12.5 12.5	13.3	1280 1280	4010	4800 4800	18.2 18.2	17.5 17.4	16.7 16.7
	20 + 20 + 20 + 20 + 20 + 50	1.67	1.67	1.67	1.67	1.67	4.17	5.5	12.5	13.3	1280	3990	4800	18.2	17.4	16.6
	20 + 20 + 20 + 20 + 20 + 60	1.56	1.56	1.56	1.56	1.56	4.69	5.5	12.5	13.3	1280	3990	4800	18.2	17.4	16.6
	20 + 20 + 20 + 20 + 20 + 71	1.46	1.46	1.46	1.46	1.46	5.19	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
	20 + 20 + 20 + 20 + 25 + 25 20 + 20 + 20 + 20 + 25 + 35	1.92 1.79	1.92 1.79	1.92 1.79	1.92 1.79	2.40	2.40 3.13	5.5	12.5 12.5	13.8	1280 1280	4000	4800 4800	18.2 18.2	17.4 17.4	16.7 16.7
	20 + 20 + 20 + 20 + 25 + 35	1.79	1.79	1.79	1.79	2.23	4.03	5.5 5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.7
	20 + 20 + 20 + 20 + 25 + 60	1.52	1.52	1.52	1.52	1.89	4.55	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
	20 + 20 + 20 + 20 + 35 + 35	1.67	1.67	1.67	1.67	2.92	2.92	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
6	20 + 20 + 20 + 20 + 35 + 50 20 + 20 + 20 + 20 + 35 + 60	1.52 1.43	1.52 1.43	1.52	1.52 1.43	2.65 2.50	3.79 4.29	5.5	12.5 12.5	13.8 13.8	1280 1280	3990 3980	4800 4800	18.2 18.1	17.4 17.3	16.6 16.6
room	20 + 20 + 20 + 20 + 35 + 60	1.43	1.43	1.43	1.43	2.35	4.29	5.5 5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
	20 + 20 + 20 + 20 + 50 + 50	1.39	1.39	1.39	1.39	3.47	3.47	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
	20 + 20 + 20 + 20 + 50 + 60	1.32	1.32	1.32	1.32	3.29	3.95	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
	20 + 20 + 20 + 25 + 25 + 25	1.85	1.85	1.85	2.31	2.31	2.31	5.5	12.5	13.8	1280	4000	4800	18.2	17.4	16.7
	20 + 20 + 20 + 25 + 25 + 35 20 + 20 + 20 + 25 + 25 + 50	1.72 1.56	1.72 1.56	1.72 1.56	2.16 1.95	2.16 1.95	3.02 3.91	5.5 5.5	12.5 12.5	13.8 13.8	1280 1280	4000 3990	4800 4800	18.2 18.2	17.4 17.4	16.7 16.6
	20 + 20 + 20 + 25 + 25 + 50	1.56	1.56	1.56	1.95	1.95	4.41	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
	20 + 20 + 20 + 25 + 25 + 71	1.38	1.38	1.38	1.73	1.73	4.90	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
	20 + 20 + 20 + 25 + 35 + 35	1.61	1.61	1.61	2.02	2.82	2.82	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
	20 + 20 + 20 + 25 + 35 + 50	1.47	1.47	1.47	1.84	2.57	3.68	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
	20 + 20 + 20 + 25 + 35 + 60 20 + 20 + 20 + 25 + 35 + 71	1.39	1.39 1.31	1.39 1.31	1.74 1.64	2.43	4.17 4.65	5.5 5.5	12.5 12.5	13.8 13.8	1280 1280	3980 3970	4800 4800	18.1 18.1	17.3 17.3	16.6 16.6
		1.01	1.01	1.01	1.04	2.29	+.∪0	ე ა.ა	12.0	10.0	1 1200	1 29/0	7000	10.1	11.3	10.0

		Indoor unit	Cooling capacity (kW) Room cooling capacity (kW)							Power	consump	tion (W)	Standard current (A)				
		combination		Roo	m cooling	capacity	(kW)		Tota	al capacity	(kW)	D.Alian	Bairs Observational Bases		0001/	0201/	0401/
	(combination	A room	B room	C room	D room	E room	F room	Min.	Standard	Max.	Min.	Standard	Max.	220V	230V	240V
		20 + 20 + 20 + 25 + 50 + 50	1.35	1.35	1.35	1.69	3.38	3.38	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 20 + 25 + 50 + 60	1.28	1.28	1.28	1.60	3.21	3.85	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 20 + 20 + 35 + 35 + 35	1.52	1.52	1.52	2.65	2.65	2.65	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		20 + 20 + 20 + 35 + 35 + 50	1.39	1.39	1.39	2.43	2.43	3.47	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 20 + 35 + 35 + 60	1.32	1.32	1.32	2.30	2.30	3.95	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 20 + 20 + 35 + 50 + 50	1.28	1.28	1.28	2.24	3.21	3.21	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 20 + 25 + 25 + 25 + 25	1.79	1.79	2.23	2.23	2.23	2.23	5.5	12.5	13.8	1280	4000	4800	18.2	17.4	16.7
		20 + 20 + 25 + 25 + 25 + 35	1.67	1.67	2.08	2.08	2.08	2.92	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		20 + 20 + 25 + 25 + 25 + 50	1.52	1.52	1.89	1.89	1.89	3.79	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		20 + 20 + 25 + 25 + 25 + 60	1.43	1.43	1.79	1.79	1.79	4.29	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 25 + 25 + 25 + 71	1.34	1.34	1.68	1.68	1.68	4.77	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 25 + 25 + 35 + 35	1.56	1.56	1.95	1.95	2.73	2.73	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		20 + 20 + 25 + 25 + 35 + 50	1.43	1.43	1.79	1.79	2.50	3.57	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 25 + 25 + 35 + 60	1.35	1.35	1.69	1.69	2.36	4.05	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 25 + 25 + 50 + 50	1.32	1.32	1.64	1.64	3.29	3.29	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 20 + 25 + 35 + 35 + 35	1.47	1.47	1.84	2.57	2.57	2.57	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 20 + 25 + 35 + 35 + 50	1.35	1.35	1.69	2.36	2.36	3.38	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
_		20 + 20 + 25 + 35 + 35 + 60	1.28	1.28	1.60	2.24	2.24	3.85	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
.5		20 + 20 + 35 + 35 + 35 + 35	1.39	1.39	2.43	2.43	2.43	2.43	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
<u>a</u>		20 + 20 + 35 + 35 + 35 + 50	1.28	1.28	2.24	2.24	2.24	3.21	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
operation	6	20 + 25 + 25 + 25 + 25 + 25	1.72	2.16	2.16	2.16	2.16	2.16	5.5	12.5	13.8	1280	4000	4800	18.2	17.4	16.7
	room	20 + 25 + 25 + 25 + 25 + 35	1.61	2.02	2.02	2.02	2.02	2.82	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
Cooling		20 + 25 + 25 + 25 + 25 + 50	1.47	1.84	1.84	1.84	1.84	3.68	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
ᅙ		20 + 25 + 25 + 25 + 25 + 60	1.39	1.74	1.74	1.74	1.74	4.17	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
ၓ		20 + 25 + 25 + 25 + 25 + 71	1.31	1.64	1.64	1.64	1.64	4.65	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 25 + 25 + 25 + 35 + 35	1.52	1.89	1.89	1.89	2.65	2.65	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		20 + 25 + 25 + 25 + 35 + 50	1.39	1.74	1.74	1.74	2.43	3.47	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 25 + 25 + 25 + 35 + 60	1.32	1.64	1.64	1.64	2.30	3.95	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 25 + 25 + 25 + 50 + 50	1.28	1.60	1.60	1.60	3.21	3.21	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 25 + 25 + 35 + 35 + 35	1.43	1.79	1.79	2.50	2.50	2.50	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 25 + 25 + 35 + 35 + 50	1.32	1.64	1.64	2.30	2.30	3.29	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		20 + 25 + 35 + 35 + 35 + 35	1.35	1.69	2.36	2.36	2.36	2.36	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		20 + 35 + 35 + 35 + 35 + 35	1.28	2.24	2.24	2.24	2.24	2.24	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		25 + 25 + 25 + 25 + 25 + 25	2.08	2.08	2.08	2.08	2.08	2.08	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		25 + 25 + 25 + 25 + 25 + 35	1.95	1.95	1.95	1.95	1.95	2.73	5.5	12.5	13.8	1280	3990	4800	18.2	17.4	16.6
		25 + 25 + 25 + 25 + 25 + 50	1.79	1.79	1.79	1.79	1.79	3.57	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		25 + 25 + 25 + 25 + 25 + 60	1.69	1.69	1.69	1.69	1.69	4.05	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		25 + 25 + 25 + 25 + 35 + 35	1.84	1.84	1.84	1.84	2.57	2.57	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		25 + 25 + 25 + 25 + 35 + 50	1.69	1.69	1.69	1.69	2.36	3.38	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		25 + 25 + 25 + 25 + 35 + 60	1.60	1.60	1.60	1.60	2.24	3.85	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		25 + 25 + 25 + 35 + 35 + 35	1.74	1.74	1.74	2.43	2.43	2.43	5.5	12.5	13.8	1280	3980	4800	18.1	17.3	16.6
		25 + 25 + 25 + 35 + 35 + 50	1.60	1.60	1.60	2.24	2.24	3.21	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6
		25 + 25 + 35 + 35 + 35 + 35	1.64	1.64	2.30	2.30	2.30	2.30	5.5	12.5	13.8	1280	3970	4800	18.1	17.3	16.6

CONTROL SYSTEM

Wired Remote Control (option)

RC-EX3 NEW

Advanced wired remote control

The RC-EX3 controller enables extensive access to service and maintenance data combined with easy to use full dot LCD back light display. Easy touch and Easy view with full dot Liquid Crystal display.

• Economy & Timer:

Peak cut timer. Home Leave Operation. Energy-saving operation.

· Comfort:

Hi power operation. Automatic fan speed. Outdoor silent mode.

· Convenience:

Multi language settings. LCD contrast setting. Function switch. External Input/Out put Function

· Service:

Error code display. Operation data display. Backup Control.



RC-E5

Wired remote control

The RC-E5 controller enables extensive access to service and maintenance technical data combined with easy to use functions and a clear LCD display.

- Weekly timer function as standard
- Timer operation
- · Run hour metres to facilitate maintenance checking
- · Room temperature controlled by the remote control sensor
- Changeable set temperature ranges



RCH-E3

Simple wired remote control

Considering specialized usage in hotel rooms, control buttons are limited only to minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

• Up to 16 units :

It can control up to 16 units individually, with pressing the AIR CON No. button

AUTO restart

This function allows starting the air conditioner automatically when power supply is restored after power failure or by turning on the power switch.



Wireless remote control (option)


For wireless control simply insert the infrared receiver kit on a corner of the panel.



CONTROL OPTION


Wired remote control can be connected

Model	Interface	Remote Control	
SRK-ZSX-S SRK-ZR-S SRK-ZS-S SRF-ZMX-S SRR-ZM-S	SC-BIKN-E	RC-EX3 RC-E5	R
FDTC-VF % FDUM50VF FDE50VG	not required		

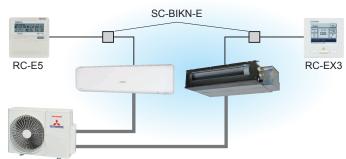

^{*} If wireless remote control is required, use RCN-TC-24W-E2

Can be connected to SUPERLINK-II

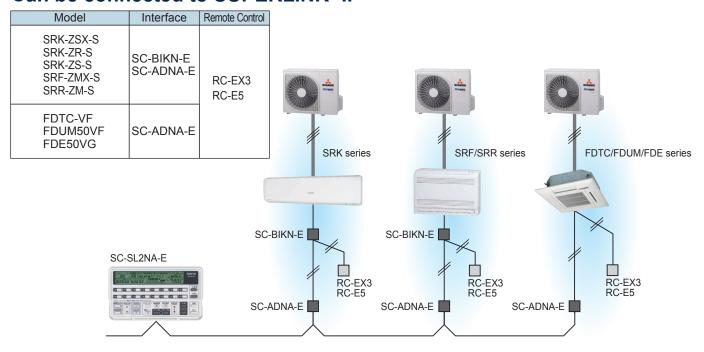

External switch connection CnT

All indoor units are equipped with an additional connection point - CnT - to connect indoor units to an external ON/OFF switch; e.g. time clock, fire alarm, etc.










Model	Interface
SRK-ZSX-S SRK-ZR-S SRK-ZS-S SRF-ZMX-S SRR-ZM-S	SC-BIKN-E
FDTC-VF FDUM50VF FDE50VG	not required

DIMENSIONS (Unit: mm)

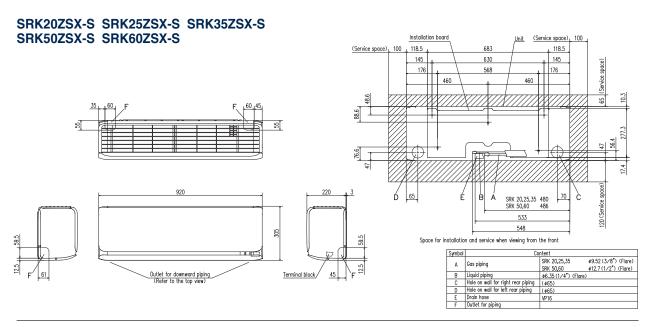




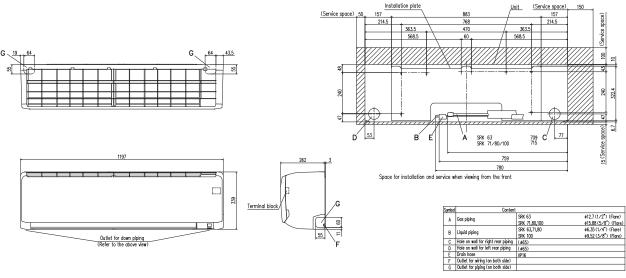


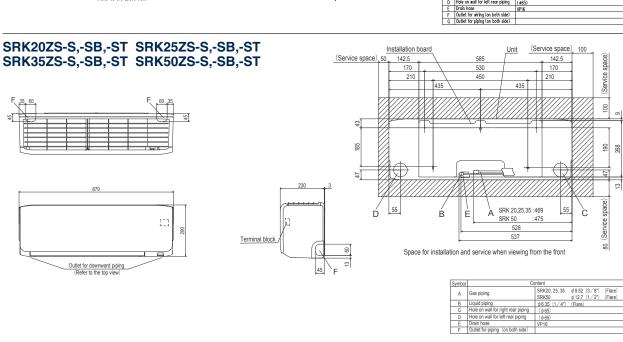


INDOOR UNIT

SRK25ZMP-S SRK35ZMP-S SRK45ZMP-S








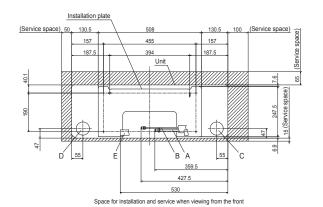



0	0	
Symbol	Content	
l a l	Gas piping	Model 25,35 φ 9.52(3/8") (F Model 45 φ 12.7(1/2") (Flan
_ ^	Gas piping	Model 45 Ø 12.7(1/2") (Flan


	A	Gas piping	Model 25,35 Ø 9.52(3/8*) (Flare)		
		Gas piping	Model 45 φ 12.7(1/2") (Flare)		
	В	Liquid piping	φ 6.35(1/4*)(Flare)		
	С	Hole on wall for right rear piping	(\$\phi\$ 65)		
	D	Hole on wall for left rear piping	(\$\phi\$ 65)		
	E	Drain hose	VP16		
	F	Outlet for wiring			
ı	G	Outlet for piping (on both side)			

SKM20ZSP-S SKM25ZSP-S SKM35ZSP-S








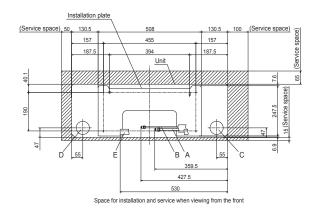



Symbol	Content	
Α	Gas piping	Model & 9.52(3/8*)(Flare)
В	Liquid piping	φ6.35(1/4")(Flare)
С	Hole on wall for right rear piping	(\$\phi\$ 65)
D	Hole on wall for left rear piping	(Ø 65)
E	Drain hose	VP16
F	Outlet for wiring	
G	Outlet for piping (on both side)	


DIMENSIONS (Unit: mm)

SRF25ZMX-S SRF35ZMX-S SRF50ZMX-S








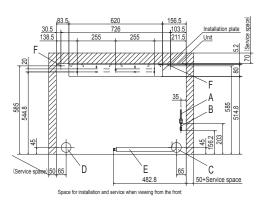



Symbol Conter			
А	Gas piping	Model	25,35 : φ9.52 (3/8*) (Flare)
^			50 : φ12.7(1/2*) (Flare)
В	Liquid piping	φ6.35	i (1/4") (Flare)
	Hole on wall for right rear piping	(ø 65	
D	Hole on wall for left rear piping	(ø 65	
E	Drain hose	VP16	
F	Screw point fasten the indoor unit	φ5	
G	Outlet for piping (on both side)		

SRR25ZM-S SRR35ZM-S

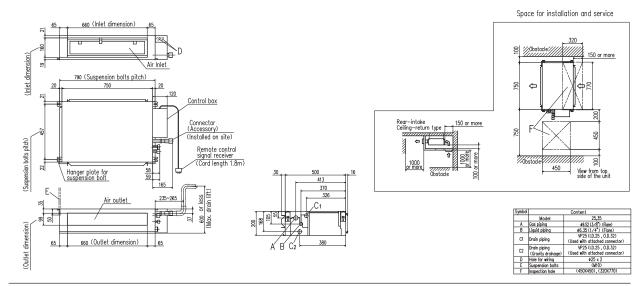




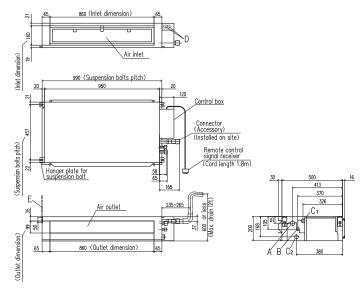

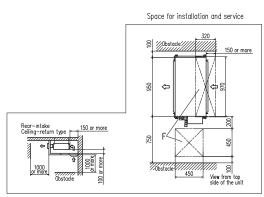


Symbol		Content
	Model	50,60
A	Gas piping	ø12.7 (1/2*) (Flare)
В	Liquid piping	#6.35 (1/4") (Flare)
C1	Drain piping	VP25 (LD.25 , O.D.32) (Used with attached connector)
C2	Drain piping (Gravity drainage)	VP25 (I.D.25 , O.D.32) (Used with attached connector)
D	Hole for wiring	#25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450), (320X970)

INDOOR UNIT

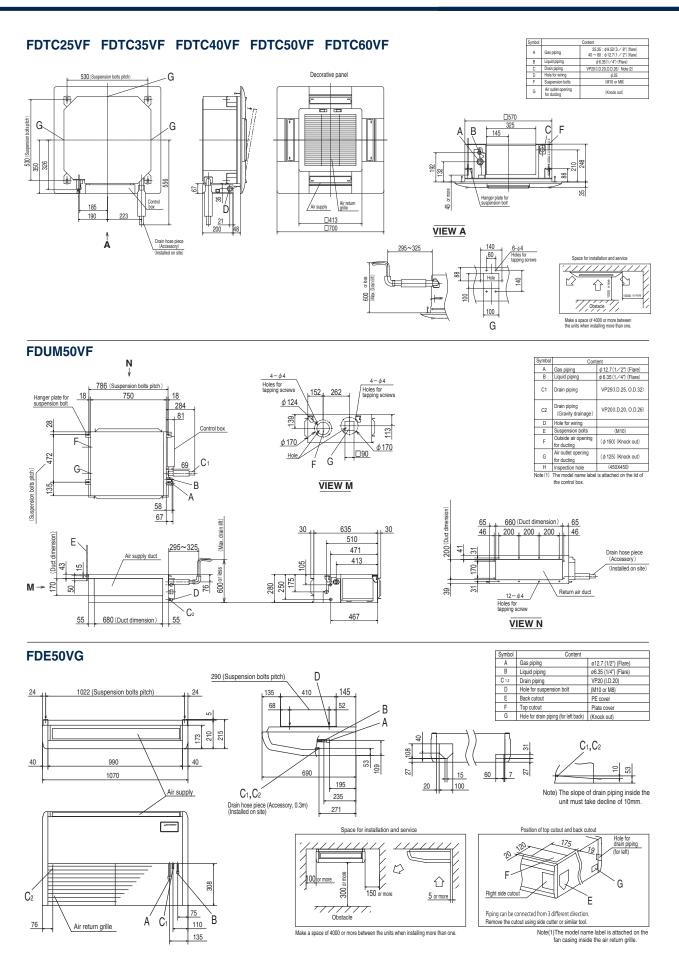



SRC20ZSX-S SRC25ZSX-S SRC35ZSX-S SRC40ZSX-S SRC50ZSX-S SRC60ZSX-S SRC50ZMX-S SRC63ZR-S

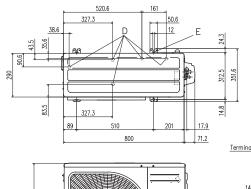


Symbol	Content	
А	Service valve connection (gas side)	20,25,35 \$\phi 9.52(3/8") (Flare) 40,50,60,63 \$\phi 12.7(1/2") (Flare)
В	Service valve connection (liquid side)	ø6.35 (1/4") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ20×5places
E	Anchor bolt hole	M10×4places


Minimum installation space									
Examples of installation Dimensions	I	11	III	IV					
L1	0pen	280	280	180					
L2	100	75	0pen	0pen					
L3	100	80	80	80					
L4	250	0pen	250	0pen					









SRK50ZS-S SRC25ZMX-S SRC35ZMX-S SRC45ZMP-S




Symbol	Content	
Α	Service valve connection (gas side)	ZMX: φ9.52(3 / 8*) (flare) ZS,ZMP: φ12.7(1 / 2*) (flare)
В	Service valve connection (liquid side)	\$6.35 (1/4") (Flare)
С	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20×2places
E	Anchor bolt hole	M10×4places


Minimum installation space				
Examples of installation Dimensions	1	П	111	N
L1	0pen	280	280	180
L2	100	75	0pen	0pen
L3	100	80	80	80
L4	250	0pen	250	0pen









SRC20ZS-S SRC25ZS-S SRC35ZS-S




Symbol	Content	
Α	Service valve connection (gas side)	ø9.52 (3∕8") (Flare)
В	Service valve connection (liquid side)	ø6.35 (1∕4") (Flare)
С	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20×2places
Е	Anchor bolt hole	M10×4places

Minimum installation space				
Examples of installation Dimensions	1	11	111	N
L1	0pen	280	280	180
L2	100	75	0pen	0pen
L3	100	80	80	80
L4	250	0pen	250	0pen









OUTDOOR UNIT


SRC71ZR-S SRC80ZR-S




Symbol	Content	
A	Service valve connection (gas side)	ø15.88 (5/8") (Flare)
В	Service valve connection (liquid side)	Ø6.35 (1/4") (Flare)
С	Pipe/cable draw-out hole	
D	Drain discharge hole	Ø20 x 3 places
E	Anchor bolt hole	M10 x 4 places


Minimum installation space			
Examples of installation Dimensions	1	11	III
L1	Open	Open	500
L2	300	250	Open
L3	100	150	100
L4	250	250	250








SRC25ZMP-S SRC35ZMP-S

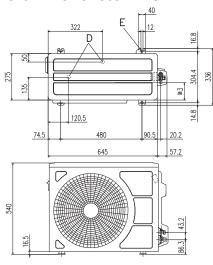


Symbol	Content	
Α	Service valve connection (gas side)	ø9.52 (3∕8") (Flare)
В	Service valve connection (liquid side)	ø6.35 (1/4") (Flare)
С	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20×2places
F	Anchor holt hole	M10 y Anlaces


Examples of installation Dimensions	1	П	III	N
L1	0pen	280	280	180
L2	100	100	0pen	0pen
L3	100	80	80	80
L4	250	0pen	250	0pen

Dimensions MODEL	*1	*2	*3
DXC09Z5-S/A	210	240	103
DXC1275-SZA	220	240	108





FDC100VNP

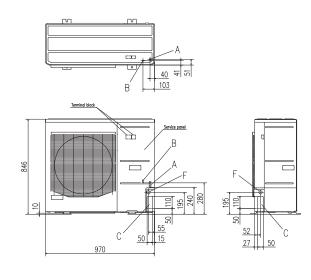

Symbol	Content	
A	Service valve connection (gas side)	ø15.88 (5/8") (Flare)
В	Service valve connection (liquid side)	φ9.52 (3/8") (Flare)
С	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20×3 places
Ε	Anchor bolt hole	M10×4 places
F	Cable draw-out hole	ø30×3 places

Notes

(1) It must not be smounded by wells on the four sides.

(2) The unit must be fixed with and/or botts. An and/or bott must not protude more than 15mm.


re)

(3) Were the unit is subject to strong-winds, lay it in such a direction that the blauer cullet too is perpendual or to the charmont wind direction.

(4) Leave Imm or more space doose the unit.

(5) A wall in fixed if the bioser cullet must not exceed the units height.


(6) The model name label is ottached on the service panel.

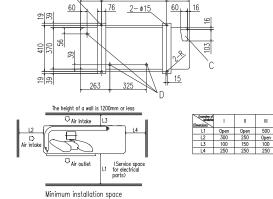

580


DIMENSIONS (Unit: mm)


SCM40ZS-S SCM45ZS-S




Symbol	Content	
Α	Service valve connection (gas side) \$\ \phi 9.52 (3/8") (F	
В	Service valve connection (liquid side)	\$\phi6.35 (1/4") (Flare) \$\$
С	Pipe/cable draw-out hole	
D	Drain discharge hole	
E	Anchor bolt hole	M10-12×4places


	Installation space	
L1	280 or more	
L2	100 or more	
L3	80 or more	
L4	250 or more	









SCM50ZS-S SCM60ZM-S




Symbol	Content	
Α	Service valve connection (gas side)	φ9.52(3/8") Flare)
В	Service valve connection (liquid side)	φ6.35(1/4") Flare)
С	Pipe / cable draw-out hole	
D	Drain discharge hole	φ 20 x 3 places
Е	Anchor bolt hole	M10 x 4 places


Minimum installation space										
Examples of Installation Dimensions	I									
L1	600									
L2	100									
L3	100									









SCM71ZM-S SCM80ZM-S

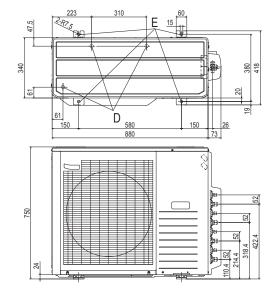


Symbol	Content	
Α	Service valve connection (gas side)	φ9.52(3/8") Flar(e)
В	Service valve connection (liquid side)	φ6.35(1/4") Flar(e)
С	Pipe / cable draw-out hole	
D	Drain discharge hole	φ 20 x 3 places
Е	Anchor bolt hole	M10 x 4 places

			Examples of Installation	
	φ 9.52 (3 / 8") Flar(e)	`	Installation	I
)	φ6.35(1/4") Flaré)	Dimensi	ons	
			L1	600
	φ 20 x 3 places		L2	100
	M10 x 4 places		L3	100






OUTDOOR UNIT

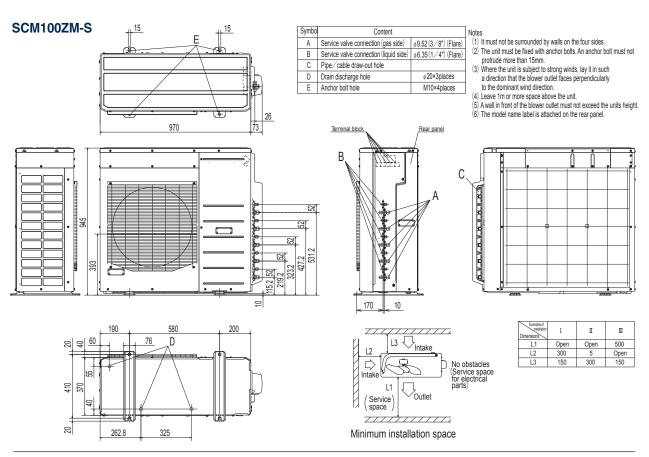



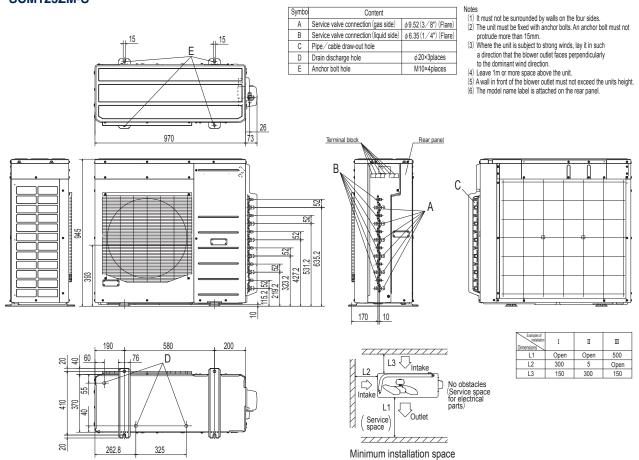

ENERGY LABEL - FOR EU/EEA AREA ONLY -

ENERGY LABEL

SEER and SCOP is defined in European regulations listed below.

No.626/2011 of 4 May 2011: energy labeling of air-conditioners (below cooling capacity 12kW).

No.206/2012 of 6 March 2012: requirement for air-conditioners and comfort fans.

Seasonal efficiency is the new way of rating the true efficiency of heating and cooling products over an entire year.


Set by the EU's new regulation implementing Eco-Design Directive for Energy Related Product (ErP) which specifies the minimum efficiency of air-conditioners manufacturers must integrate into their products.

The new Seasonal Efficiency rating system that must be used for heating and cooling by all manufacturers are:

SEER - Seasonal Efficiency Ratio (value in cooling)

SCOP - Seasonal Coefficient of Performance (value in heating)

The new rating system will indicate the true efficiency of the energy using product at specified condition.

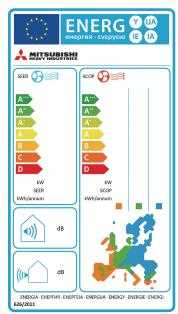

Employment of lead-free solder

Adapted to RoHS directive

RoHS:Restriction of Hazardous substances

In order to avoid the release of hazardous substances into the environments, all models have utilized lead-free solder application. It has been considered to be difficult to use lead-free solder for practical applications because it requires higher solder temperatures at assembly, which can jeopardize reliability. However our PbF soldering method can produce a higher quality lead-free printed circuit board.

Employment of R410A

All models use refrigerant R410A characterized by the ozone depletion coefficient being 0.

Excellent Energy Saving

High performance and excellent energy savings are achieved at the same time by heat exchanger's increased capacity and employment of high efficiency DC motor.

Environmental

Mitsubishi Heavy Industries Thermal systems are unswervingly dedicated to facing the challenges of the future. Mitsubishi Heavy Industries Thermal systems are dedicated to supporting global sustainability by offering the most energy-efficient air-conditioning systems. Through our in-depth research and development we are able to incorporate new technologies within our units to maximise their energy efficiency and significantly reduce carbon emissions.

Environmental Impact

Mitsubishi Heavy Industries Thermal systems recognises the increasing importance of reducing carbon emissions as this is becoming a priority when selecting air and water distribution systems. Furthermore new technologies are constantly being developed to help meet heating and cooling requirements as well as environmental objectives.

The future of our planet rests in the sustained evolution of humankind while caring, with love and responsibility, for all life forms that inhabit it. Therefore Mitsubishi Heavy Industries Thermal systems will continue to develop new technologies and products and will remain competitive in the market to achieve a sustainable future.

Based on European regulations listed below, please refer the following specification table.

Indoor unit		SRK20ZSX-S	SRK25ZSX-S	SRK35ZSX-S	SRK50ZSX-S	SRK60ZSX-S	SRK63ZR-S	SRK71ZR-S
Outdoor unit		SRC20ZSX-S	SRC25ZSX-S	SRC35ZSX-S	SRC50ZSX-S	SRC60ZSX-S	SRC63ZR-S	SRC71ZR-S
Energy class (cooling/heating)		A+++/A+++	A+++/A+++	A+++/A+++	A++/A++	A++/A++	A++/A++	A++/A+
SEER		9.50	9.60	9.20	8.20	7.60	7.60	7.20
SCOP (Average climate)		5.20	5.20	5.10	4.70	4.70	4.70	4.50
Pdesignc	kW	2.00	2.50	3.50	5.00	6.10	6.30	7.10
Pdesignh (@-10°C)	kW	2.70	2.90	3.30	4.50	5.20	5.40	6.60
Annual electricity consumption (cooling/heating)	kWh/a	74/728	92/781	134/906	214/1341	282/1551	291/1610	346/2055
Designated heating season		Average						

		Y			Y			
Indoor unit		SRK80ZR-S	SRK100ZR-S	SRK20ZS-S,-SB,-ST	SRK25ZS-S,-SB,-ST	SRK35ZS-S,-SB,-ST	SRK50ZS-S,-SB,-ST	SRK25ZMP-S
Outdoor unit		SRC80ZR-S	FDC100VNP	SRC20ZS-S	SRC25ZS-S	SRC35ZS-S	SRC50ZS-S	SRC25ZMP-S
Energy class (cooling/heating)		A++/A+	A++/A+	A++/A++	A++/A++	A++/A++	A++/A+	A/A
SEER		6.60	6.60	7.80	7.80	7.80	6.26	5.50
SCOP (Average climate)		4.40	4.40	4.60	4.60	4.60	4.20	3.82
Pdesignc	kW	8.00	10.0	2.00	2.50	3.50	5.00	2.50
Pdesignh (@-10°C)	kW	7.10	7.20	2.40	2.50	2.80	3.90	2.80
Annual electricity consumption (cooling/heating)	kWh/a	425/2261	531/2289	90/732	113/762	158/852	280/1300	160/1027
Designated heating season		Average						

Indoor unit		CDV257MD C	SRK45ZMP-S	CDE257MV C	SRF35ZMX-S	SRF50ZMX-S	SRR25ZM-S	SRR35ZM-S
indoor unit		SKK35ZIVIF-3	SKK45ZIVIF-S	SKF25ZIVIX-3	SKF35ZIVIA-3	SKF5UZIVIA-S	SKK25ZIVI-S	SKK35ZIVI-S
Outdoor unit		SRC35ZMP-S	SRC45ZMP-S	SRC25ZMX-S	SRC35ZMX-S	SRC50ZMX-S	SRC25ZMX-S	SRC35ZMX-S
Energy class (cooling/heating)		A++/A+	A/A	A++/A+	A++/A+	A+/A+	A++/A	A++/A+
SEER		6.15	5.38	6.90	6.67	6.01	6.43	6.31
SCOP (Average climate)		4.00	3.81	4.12	4.25	4.19	4.08	4.02
Pdesignc	kW	3.20	4.50	2.50	3.50	5.00	2.50	3.50
Pdesignh (@-10°C)	kW	3.00	3.80	3.10	3.50	5.20	3.30	3.55
Annual electricity consumption (cooling/heating)	kWh/a	183/1052	293/1398	127/1053	184/1153	292/1736	136/1133	195/1238
Designated heating season		Average						

Indoor unit		FDTC25VF	FDTC35VF	FDTC40VF	FDTC50VF	FDTC60VF
Outdoor unit		SRC25ZMX-S	SRC35ZMX-S	SRC40ZSX-S	SRC50ZSX-S	SRC60ZSX-S
Energy class (cooling/heating)		A++/A+	A++/A+	A++/A	A+/A	A+/A
SEER		6.10	6.12	6.53	6.01	5.76
SCOP (Average climate)		4.13	4.15	3.96	3.85	3.80
Pdesignc	kW	2.55	3.60	4.00	5.00	5.60
Pdesignh (@-10°C)	kW	3.10	3.60	4.00	4.80	5.90
Annual electricity consumption (cooling/heating)	kWh/a	147/1050	207/1215	215/1416	291/1745	341/2172
Designated heating season		Average				

Inverter Multi-split System

Indoor unit		SRK20ZSX-S x 2	SRK20ZSX-S +SRK25ZSX-S	SRK20ZSX-S x 3	SRK20ZSX-S x 3	SRK20ZSX-S x 4	SRK20ZSX-S x 4	SRK20ZSX-S x 5
Outdoor unit		SCM40ZS-S	SCM45ZS-S	SCM50ZS-S	SCM60ZM-S	SCM71ZM-S	SCM80ZM-S	SCM100ZM-S
Energy class (cooling/heating)		A++/A+	A++/A+	A++/A+	A++/A+	A++ /A	A++/A	A/A+
SEER		6.31	6.43	6.73	6.55	6.41	6.29	5.10
SCOP (Average climate)		4.05	4.11	4.02	4.01	3.81	3.81	4.02
Pdesignc	kW	4.00	4.50	5.00	6.00	7.10	8.00	10.00
Pdesignh (@-10°C)	kW	3.30	4.10	4.70	7.10	7.30	7.50	10.10
Annual electricity consumption (cooling/heating)	kWh/a	222/1140	245/1396	261/1637	321/2480	388/2682	446/2755	687/3519
Designated heating season					Average			

Before starting use

Heating performance

The heating performance values (kW) described in the catalogue are the values obtained by operating at an outdoor temperature of 7°C and indoor temperature of 20°C as set forth in the ISO Standards. As the heating performance decreases the outdoor temperature drops, if the outdoor temperature is too low and the heating performance is insufficient, use other heating appliances as well.

Indication of sound values

The sound values are the values (A scale) measured in a chamber such as an anechoic chamber following the ISO Standards. In the actual installation state, the value is normally larger than the values given in the catalog due to the effect of surrounding noise and echo. Take this into consideration when installing.

Use in oil atmosphere

Avoid installing this unit in an atmosphere where oil scatters or builds up,

such as in a kitchen or machine factory.

If the oil adheres to the heat exchanger, the heat exchanging performance will drop, mist may be generated, and the synthetic resin parts may deform

Use in acidic or alkaline atmosphere

If this unit is used in acidic atmosphere such as hot spring areas having high level of sulfuric gases or in alkaline atmosphere including ammonia or calcium chloride, places where the exhaust of the heat exchanger is sucked in, or at coastal areas where the unit is subject to salt breezes, the outer plate or heat exchanger, etc., will corrode. Please ask a dealer or specialist when you use an air conditioner in places differing from a general atmosphere.

Use in places with high ceilings

If the ceiling is high, install a circulator to improve the heat and air flow distribution when heating

Refrigerant leakage

The refrigerant (R410A) used for the Residential Air conditioner is non-toxic and inflammable in its original state.

However, in consideration of a state where the refrigerant leaks into the room, measures against refrigerant leaks must be taken in small rooms where the tolerable level could be exceeded. Take measures by installing ventilation devices, etc.

Use in snowy areas

Take the following measures when installing the outdoor unit in snowy areas

·Snow-prevention

Install a snow-prevention hood so that the snow does not obstruct the air intake port or enter and freeze in the outdoor unit.

·Snow piling

In areas with heavy snow fall, the piled snow could block the air intake port. In this case, a frame that is 50cm or higher than the estimated snow fall must be installed underneath the outdoor unit.

Automatic defrosting device

If the temperature is low, and the humidity is high, frost will stick to the heat exchanger of the outdoor unit. If use is continued, the heating performance will drop.

The "Automatic defrosting device" will function to remove this frost. After heating for approx, three to ten minutes, it will stop, and the frost will be removed. After defrosting, hot air will be blown again.

Servicing the air-conditioner

After the air-conditioner is used for several seasons, dirt will build up in the air-conditioner causing the performance to drop. In addition to regular servicing, we recommend the maintenance contract (charged for) by a specialist.

Safety Precautions

Air-conditioner usage target

The air-conditioner described in this catalogue is a dedicated cooling/heating device for human use.

Do not use it for special applications such as the storage of food items, animals or plants, precision devices or valuable art, etc.

This could cause the quality of the items to drop, etc

Do not use this for cooling vehicles or ships. Water leakage or current leaks could occur.

Before use

Always read the "User's Manual" thoroughly before starting use.

Installation

Always commission the installation to a dealer or specialist. Improper installation will lead to water leakage, electric shocks and fires

Make sure that the outdoor unit is stable in installation. Fix the unit to stable base.

Usage place

Do not install in places where combustible gas could leak or where there are sparks.

Installation in a place where combustible gas could be generated, flow or accumulate, or places containing carbon fibers could lead to fires.



MITSUBISHI HEAVY INDUSTRIES THERMAL SYSTEMS, LTD.

(Wholly-owned subsidiary of MITSUBISHI HEAVY INDUSTRIES, LTD.)

16-5, Konan 2-chome, Minato-ku, Tokyo, 108-8215 Japan http://www.mhi-mth.co.jp/en/

Our factories are ISO9001 and ISO14001 certified.

Certified ISO 9001



TUV ISO 9001









Because of our policy of continuous improvement, we reserve right to make changes in all specifications without notice.