

2012 Eco·lution

High Performance
Air-Conditioning



NEW

eco touch
REMOTE CONTROL

HyperMulti
KX·KXR

VRF inverter multi-system Air-Conditioners


CE
50Hz
12KX01E-A-0



evolution

History of Technologies

more efficient , more sophisticated

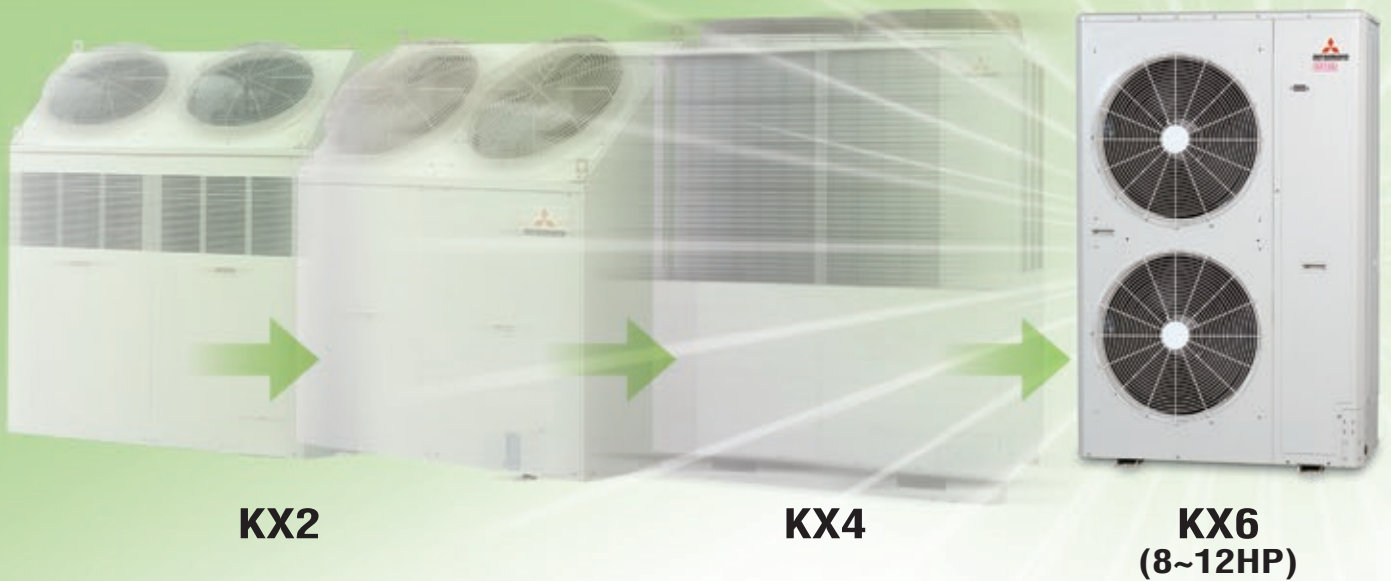

Line Up



MicroKX

KX·KXR6

Contents

Introduction	4~17
Outdoor units	18~49
Indoor units	50~85
Control systems	86~93
High Head series	94~97
Refresh KX outdoor units	98 · 99
Further information	100~103



Product Line Up

<Outdoor units>

from 11.2kW up to 136.0kW(24models)

Single use (1 Outdoor unit)												
Capacity	4HP	5HP	6HP	8HP	10HP	12HP	14HP	16HP	18HP	20HP	22HP	24HP
Model Code : kW	11.2	14	15.5	22.4	28	33.5	40.0	45.0	50.4	56.0	61.5	68.0
BTU / h	38,200	47,800	52,900	76,400	95,500	114,300	136,500	153,600	172,000	191,100	209,900	232,000
kcal / h	9,630	12,040	13,330	19,260	24,080	28,810	34,400	38,700	43,340	48,160	52,890	58,480

Combination use (2 Outdoor units)												
Capacity	26HP	28HP	30HP	32HP	34HP	36HP	38HP	40HP	42HP	44HP	46HP	48HP
Model Index : kW	73.5	80.0	85.0	90.0	96.0	101.0	106.5	113.0	118.0	123.5	130.0	136.0
BTU / h	250,800	273,000	290,100	307,100	327,600	344,700	363,400	385,600	402,700	421,400	443,600	464,100
kcal / h	63,210	68,800	73,100	77,400	82,560	86,860	91,590	97,180	101,480	106,210	111,800	116,960



MicroKX

4HP	5HP	6HP
FDC112KXEN6	FDC140KXEN6	FDC155KXEN6
FDC112KXES6	FDC140KXES6	FDC155KXES6

- 1-phase 220-240V
- 3-phase 380-415V



MicroKX

8HP	10HP	12HP
FDC224KXE6	FDC280KXE6	FDC335KXE6



KX6

12HP	14HP	16HP	18HP
FDC335KXE6-K*	FDC400KXE6	FDC450KXE6	FDC504KXE6

20HP	20HP	22HP	24HP
FDC560KXE6	FDC560KXE6-K*	FDC615KXE6	FDC680KXE6



KX6

26HP	28HP	30HP	32HP	34HP	36HP
FDC735KXE6	FDC800KXE6	FDC850KXE6	FDC900KXE6	FDC960KXE6	FDC1010KXE6
12+14	14+14	14+16	16+16	16+18	18+18
FDC335KXE6-K FDC400KXE6	FDC400KXE6 FDC400KXE6	FDC400KXE6 FDC450KXE6	FDC450KXE6 FDC450KXE6	FDC450KXE6 FDC504KXE6	FDC504KXE6 FDC504KXE6

38HP	40HP	42HP	44HP	46HP	48HP
FDC1065KXE6	FDC1130KXE6	FDC1180KXE6	FDC1235KXE6	FDC1300KXE6	FDC1360KXE6
18+20	20+20	20+22	22+22	22+24	24+24
FDC504KXE6 FDC560KXE6	FDC560KXE6 FDC560KXE6	FDC560KXE6-K FDC615KXE6	FDC615KXE6 FDC615KXE6	FDC615KXE6 FDC680KXE6	FDC680KXE6 FDC680KXE6

* FDC335KXE6-K & FDC560KXE6-K are only used for combining with other models.

<Indoor units>

Wide variety of 17 types 89 models

A range of 17 types of exposed or concealed indoor units, in wide capacities, 89 indoor models. The best selection of indoor units for many kinds of rooms and preference can be available from our full lineup.



Indoor units lineup

Type			Capacity		0.5HP	0.8HP	1HP	1.25HP	1.6HP	2HP	2.5HP	3.2HP	4HP	5HP	6HP	8HP	10HP
			Model Code : kW		15	22	28	36	45	56	71	90	112	140	160	224	280
Ceiling Cassette	4way	FDT				●	●	●	●	●	●	●	●	●			
	4way Compact (600 x 600)	FDTC			●	●	●	●	●								
	2way	FDTW				●		●	●	●	●	●	●				
	1way Compact	FDTQ			●	●	●										
	1way	FDTS							●	●							
Duct Connected	High Static Pressure	FDU						●	●	●	●	●	●	●	●	●	●
	Low/Middle Static Pressure	FDUM			●	●	●	●	●	●	●	●	●	●			
	Low Static Pressure (thin)	FDUT		●	●	●	●	●	●	●							
	Compact & Flexible	FDUH			●	●	●										
Wall Mounted		FDK			●	●	●	●	●	●							
Ceiling Suspended		FDE					●	●	●	●		●	●				
Floor Standing	2way	FDW				●		●	●								
	with casing	FDL								●							
	without casing	FDU				●		●	●	●							
OA Processing unit		FDU-F										●		●		●	●
Type			Air flow M³/h	250	350	500	800	850	1000	1300	1800						
Fresh Air Ventilation and Heat Exchange unit		SAF		●	●	●	●		●								
Fresh Air DX Assembly		SAF-DX		●	●	●	●		●								



eco touch REMOTE CONTROL

Advanced touch screen panel with full dot Liquid Crystal display

User friendly

- LCD panel with light tap operation introduced as the industry's first
- Simple interface with only three buttons

High level of visibility

- Big LCD with 3.8 inch full dot display
- Back light function
- Multi language display (9 languages)

NEW

RC-EX1A



Run / Stop

High power operation

The highest capacity operation (Max 15 minutes)

- Increasing compressor speed
- Increasing air flow volume


Energy-saving operation

- Changes set temperature.
At 28°C in cooling mode and 22°C in heating mode, 25°C in auto mode.
- Operation correction by outdoor temperature


Simple setting by tapping button only

1. Basic operation

All settings done by tapping touch screen panel

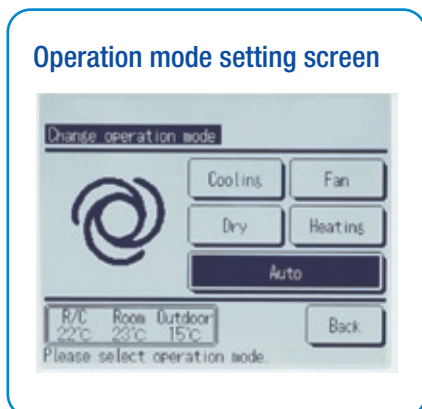

The desired operation mode can be selected by simply tapping this button.

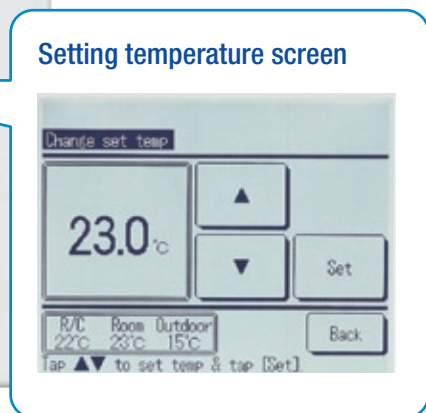

You can select the temperature as desired by tapping ▲▼ button.

Operation mode

- Cooling
- Fan
- Dry
- Heating
- Auto

2. Main functions

Saving energy

- Sleep timer
- Peak cut timer
- Automatic temperature set back
- Weekly timer
- Set ON/OFF timer by hour
- Set ON/OFF timer by clock

Convenience

- LCD contrast setting
- Back light setting
- Filter sign
- Control sound
- Outdoor silent mode
- Summer time setting
- Home leave mode
- Indoor & outdoor temperature display
- Heating standby display
- Defrosting operation display
- Auto cooling/heating display
- °C/°F display
- Administrator settings
- Room name setting

Comfort


- Individual flap control
- High power operation
- External ventilation ON/OFF
- Warming up operation
- Automatic fan speed
- Temperature increment setting by 0.5°C

Service

- Error code display
- Operation data display
- Next service date display
- Contact company display
- USB connection (mini-B)

eco touch Remote control RC-EX1A Series Utility Software

By connecting this system to the eco touch Remote Control, the eco touch Remote Control can be operated from PC.

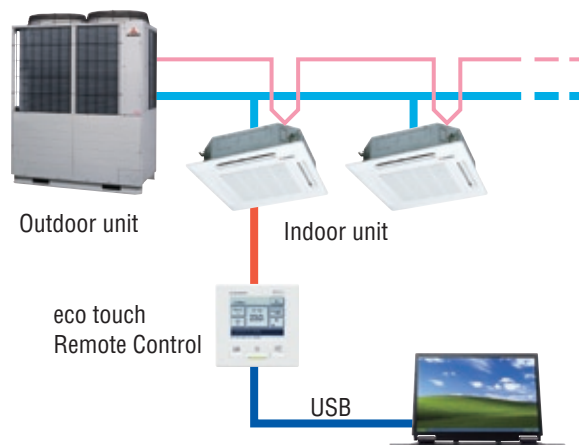



eco touch Remote Control RC-EX1A Utility Software



1. High Efficiency (KX6)

The industry's highest COP levels

We have cleared the class A standard, the highest energy saving level, with our high COP (Coefficient Of Performance).

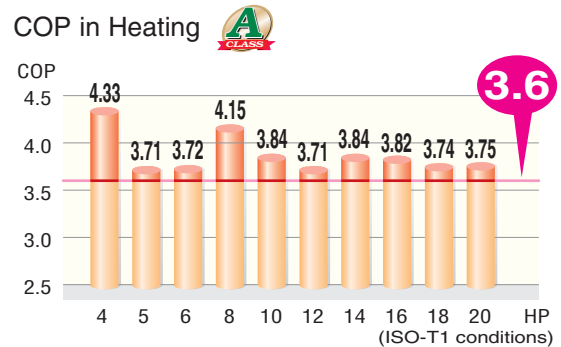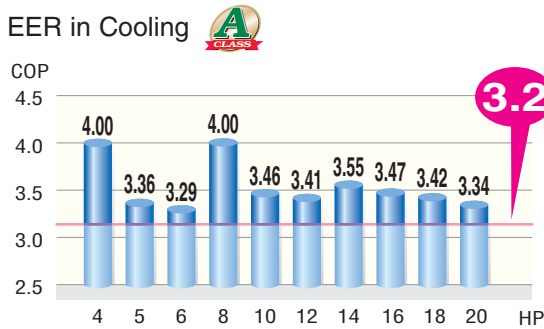


* COP = Capacity[kW] / Power Consumption[kW]


* COP across the KX6 range ensures reduced running costs and reduced environmental impact.

2. Compact Design

4~6HP(KX6)

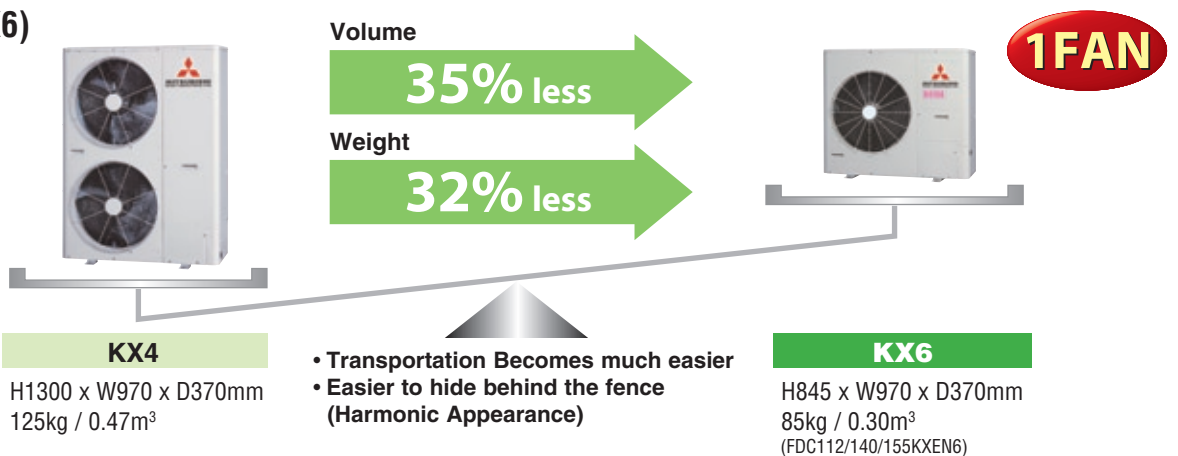


8~12HP(KX6)

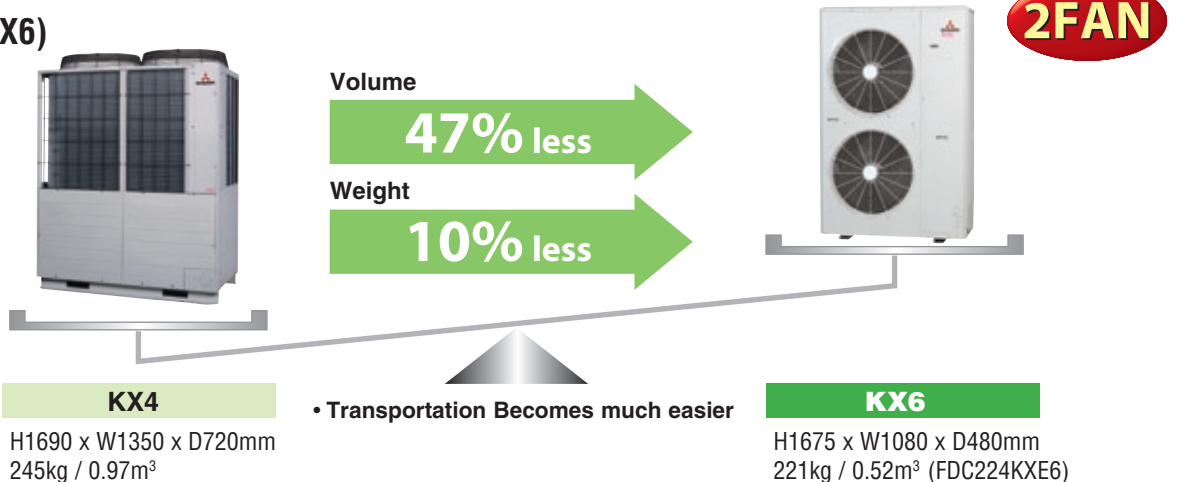


High efficiency and compact design are realized applying the various advanced functions

4~6HP(KX6)

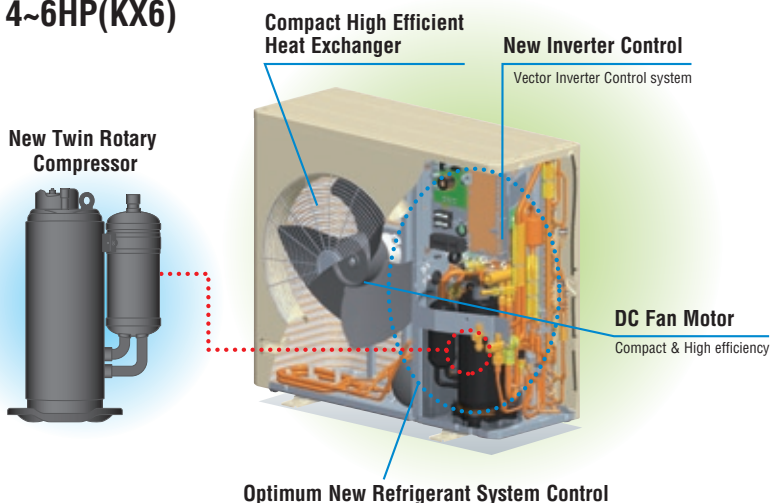


Compact high efficiency Heat Exchanger


- Optimizing relationship of the air flow velocity & fin pattern
- Improvement of air distribution Maximizing efficiency of heat exchanger

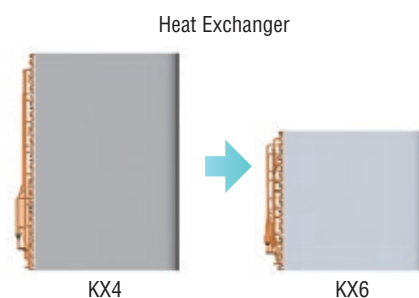

8~12HP(KX6)

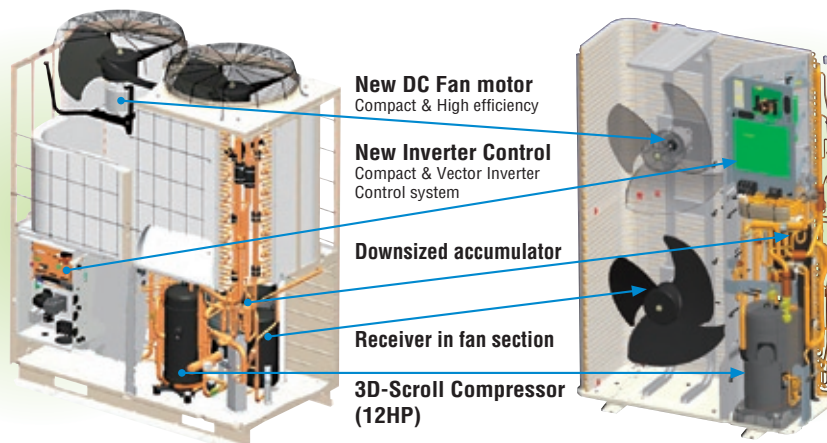


14~48HP(KX6)

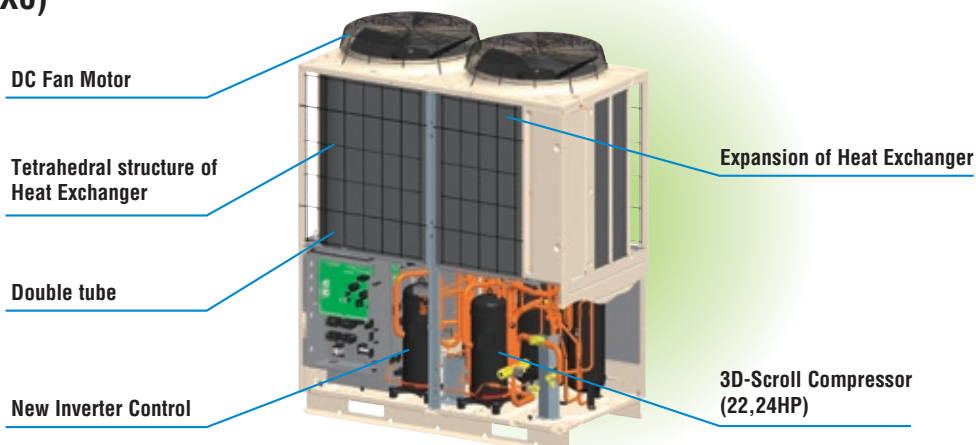




3D Scroll Compressor

Unit start up speed in heating mode drastically improved for lower outdoor temperature operation.

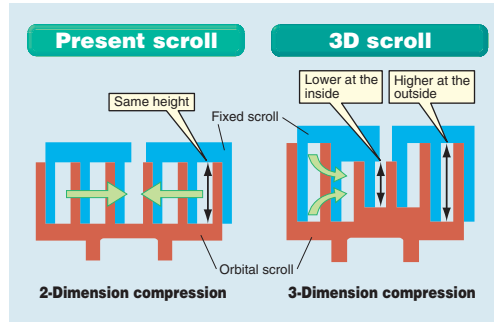

3D scroll compressor has the different height scroll at the outside and the inside.

A high compression ratio is improved by compressing the refrigerant both radially and axially. 3-Dimension Compression has been realized with a much higher efficiency even if compression ratio is high.

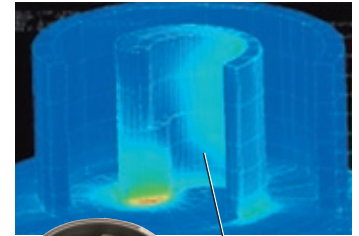

High strength due to the lower teeth inside

The strength of the scroll is improved by reducing the height of the inner wrap, which receives a heavy load.

※ 3D compressors are applied for 12HP, 20HP, 22HP & 24HP.

New Inverter Control (Vector control)

New Inverter Control has applied new advanced technology of Vector control and has realized high efficiency.

- Smooth operation from low speed to high speed
- Smooth Sine Voltage Wave form are attained
- Energy efficiency is further improved in low speed range

Compact Integrated PCB

- Control Box size reduction
- PCB size reduced by 50 %
Control PCB: Single-sided board → Double-sided board
Inverter PCB: Power transistor size reduction
- New Superlink system control
- New Design method applied



KX4

Control PCB



KX6


Optimum Refrigerant System Control

We have improved refrigeration circuit from our long experience and have realized following Optimum Refrigerant System Control.

- Optimum heat exchanger refrigerant distribution
- Advanced refrigerant liquid return protection control system
- High speed system control by new Superlink system
- Use of larger diameter for suction piping and discharge piping and redesigned of double tube


DC Fan Motor

Employment of DC fan motor has enabled to realize an excellent efficiency of approximate 60% higher than previous models.

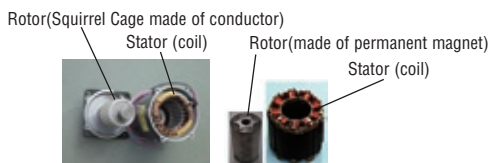

Long-chorded 3 propeller fan with serration

Fan blade design adapted from MHI's aerospace division - with serrated edges that deliver increased air volume with less power input.

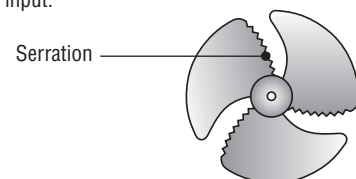

3. Design Flexibility

Increased indoor unit connection capacity

KX6 series(4~34HP) can connect indoor unit capacity up to 150~200% from 130% of previous models.


If the connection capacity of indoor units is more than 100%, capacity of each indoor unit may be affected by connection capacity ratio.

Capacity connection

HP	KX4,KXR4	HP	KX6	HP	KXR6
5~12	130%	4~12	150%	8~16	200%
14,16	130%	14,16	200%	18~34	160%
18~34	130%	18~34	160%	36~48	130%
36~48	130%	36~48	130%		


- In case that capacity connection is more than 130%, additional charge of refrigerant is required on site.

- In case of 8-34HP of KX6/KXR6 system, if one or more indoor units of FDK, FDFL, FDFU and/or FDFW series are connected to the system, the total connecting capacity of indoor units should not exceed 130%.

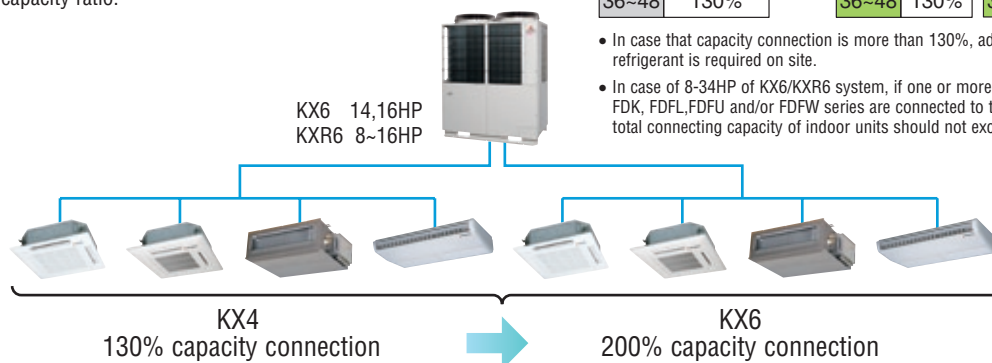

More connectable indoor units

KX6 enable more connectable indoor units (per kW), compared with former model KX4.

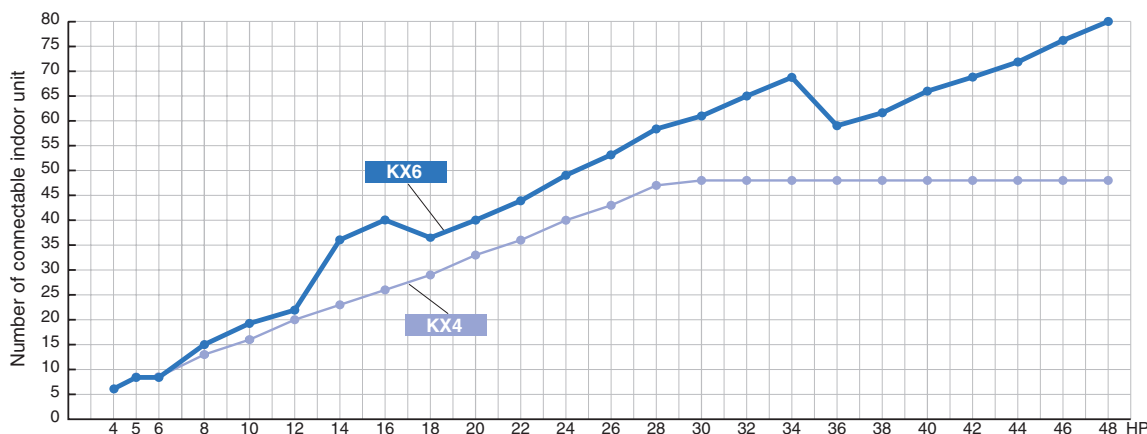

Control Systems

KX6 series offer wide variation of control system and provide the best solution.

[KX6, KXR6 Control system units with "New" SUPERLINK-II]



Classification	Type	Model	Connectable Indoor units (Maximum)	Electric power calculation	
Individual controller	Wired	RC-E5	1	—	
		RC-EX1A	1	—	
	Wireless	RCN-T-36W-E etc.	1	—	
Center Console	Push buttons	SC-SL1N-E	16	—	
		SC-SL2NA-E	64	—	
	Touch screen	SC-SL3NA-AE	128	—	
		SC-SL3NA-BE	128	●	
	PC windows interface units	SC-WGWNA-A	128(64x2)	—	
		SC-WGWNA-B	128(64x2)	●	
	BMS interface units	BACnet	SC-BGWNA-A	128(64x2)	—
			SC-BGWNA-B	128(64x2)	●
Lonworks		SC-LGWNA-A	96(48x2)	—	



Long Pipe Length

Piping length has extended max height difference between indoor units from 4m to 18m and enables us to put indoor unit on extra three floors.



As a result of the adoption of thinner refrigerant piping and refrigerant volume reductions, the industry's longest 160 m actual piping length or 1000m total piping length is realized.

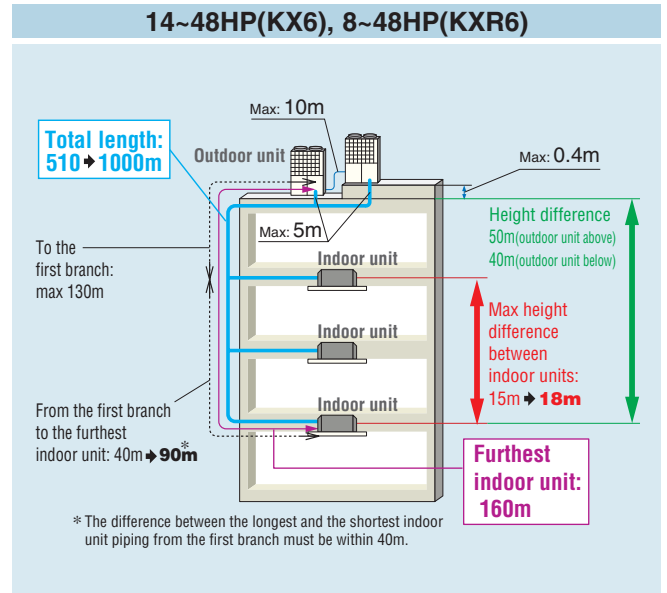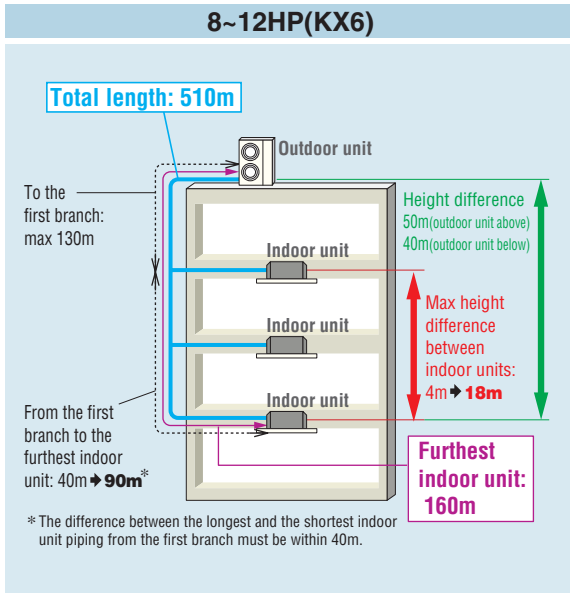



- (1) Divide up the refrigerant system into independent refrigeration circuit systems in case required additional refrigerant on site is 50kg or more for 14~24HP and 100kg or more for 26~48HP.
- (2) In case indoor unit connection capacity is 130% or more or total piping length is 510m or more, additional charge of refrigerant and oil on site is required. Refer to our Installation Manual for details.

Easy Transportation & Installation

Due to realization of significant reduction in size and foot print which is one of the smallest in the industry, transportation in an elevator made for six persons (Width:1400mm, Depth:850, Open area:800mm) is possible, eliminating cost of a crane and reducing labor.

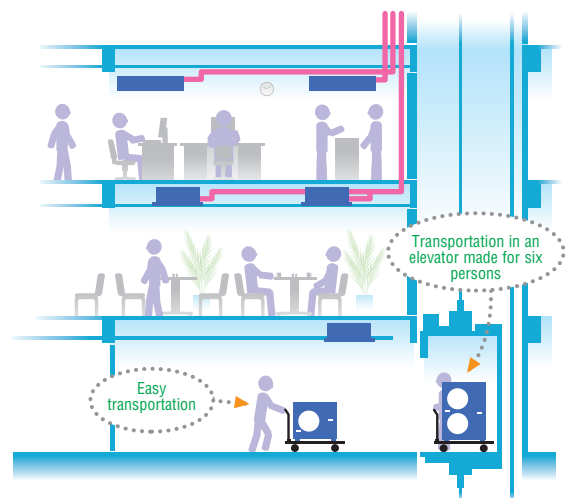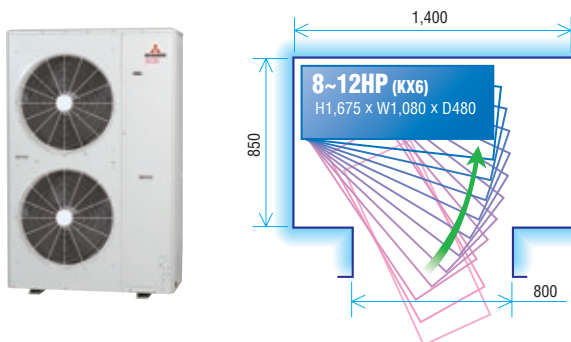


KX6(14~48HP) is portable and the uniform reduced footprint allows neat, continuous installation.

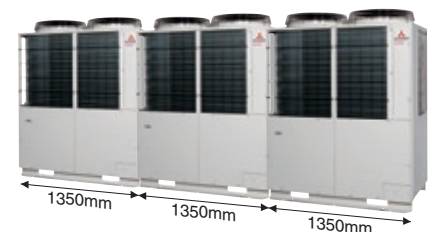

Wide Range of Operation


KX6, KXR6 series permits a system design considering a heating range operation under a low temperature condition up to -20°C from -15°C of previous model and a cooling range operation under -15°C from -5°C of that.

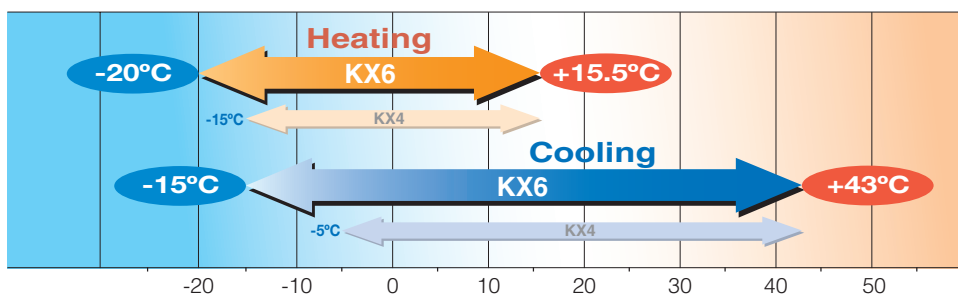

* For the capacities under low temperature conditions, refer to technical manual.

Remote control for all indoor units

Applying nonpolar 2-core in remote control line, it is very convenient for installation including renewal case.

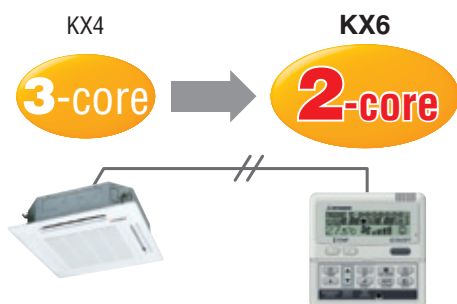

Max length of electrical wiring

The wiring must be a 2-core shielded cable size 0.75mm² to 1.25mm².


The max length of 2-core can be 1500m from 1000m of previous models.



4. Serviceability


Easy Service

Quick and easy access to service parts by separation of compartments.

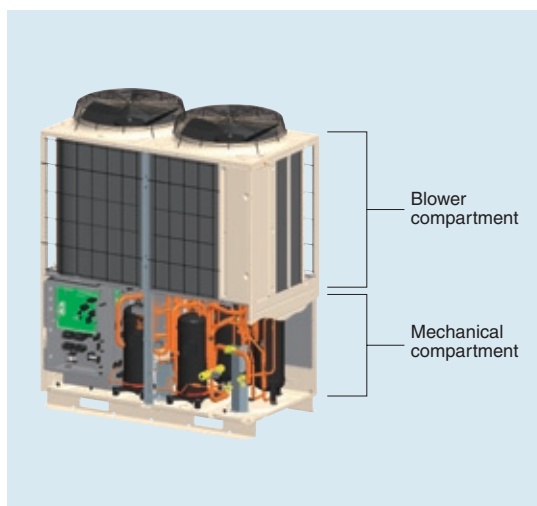

Check Operation (8~48HP)

Closing of Service valve, crossing connection of refrigerant piping and electrical wiring, proper operation of EEV (Electrical Expansion Valve) can be checked automatically in cooling operation. This check operation can be done at 0~43°C outdoor temperature and 10~32°C indoor temperature by use of outdoor unit dip switch. The check should be done in one refrigerant system. It takes 15~30 minutes and avoids frequent failure by preventing careless mistakes during installation.

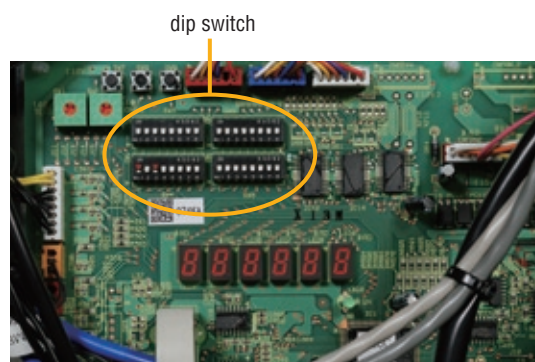





Monitoring Function

KX6 series includes new feature to assist with servicing and trouble shooting. Various data can be monitored through 3-digit or 6-digit display on the outdoor unit PCB.

Detailed fault diagnosis and operation history memory via 7-segment display.




4~6HP



8~48HP

Equipped with RS232C for connection directly to your PC monitoring and service tasks made simple with our service software ("Mente PC").
all KX6, KXR6 series

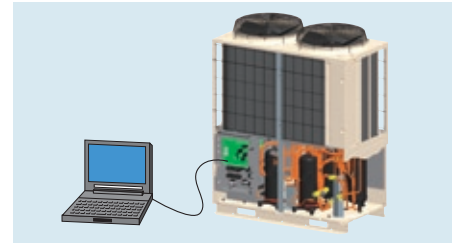


3 Layer Construction (KX6 <14~48HP>, KXR6 <8~48HP>)

Thanks to improvement of control box structure from 4 to 3 layer construction and by use of hinged lays, service and maintenance has been made much easier for inverter components.



Back-up Operation <14~48HP>


In, 2-compressor module, in the event of the compressor failure, the system will keep operating with good compressor. In combined module, in the event that one unit has a failure, the system will keep operating with another unit. Should compressor be damaged, compressor replacement should be done as soon as possible. However as emergency measure for a limited time, in 2 compressor module, the system can be kept operating with the good compressor. In combined module, the system can be kept operating with the other unit.

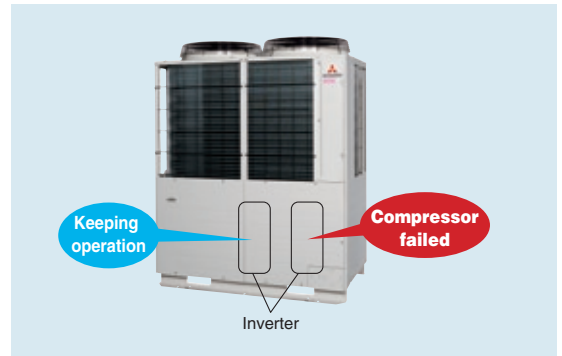

Reduced Refrigerant Volume

To use the new refrigerant R410A, KX6 series have adopted thinner diameter refrigerant pipes, which will help reduce piping work cost.

KX6 R410A



ex.10HP

Outdoor unit


HP	KX6	
	Liquid piping	Gas piping
4	ø9.52	ø15.88
5		
6		
8		
10		
12	ø12.7	ø25.4[ø28.58]
14		
16		
18		
20	ø15.88	ø31.8[ø34.92]
22		
24		
26		
28		
30		
32		
34		
36	ø19.05	ø38.1[ø34.92]
38		
40		
42		
44		
46		
48		

[]: Pipe sizes applicable to European installations are shown in parentheses.

mm	ø9.52	ø12.7	ø15.88	ø19.05	ø22.22	ø25.4	ø28.58	ø31.8	ø34.92	ø38.1	ø44.5	ø50.8
inch	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/8"	1 1/4"	1 3/8"	1 1/2"	1 3/4"	2"

Blue Fin

Due to application of blue coated fins for the heat exchanger of new outdoor unit, corrosion resistance has been improved compared to current models.

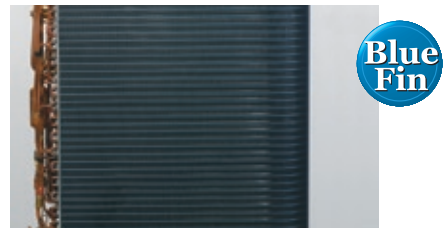


KX6 heat pump systems

KX6 heat pump systems operate with 2 inter-connecting pipes, thus commonly referred to as a '2-pipe system'.

These systems provide either a heating or cooling operation to all indoor units and are suitable for a wide range of applications from an individual apartment (with "Micro KX", 1/phase system) to an entire multi storey building, especially where there are significant open plan areas to be controlled.



The range starts with a 11.2kW cooling capacity, up to the largest capacity single outdoor unit in the industry (24hp) with 68.0kW cooling capacity. Outdoor units can also be "twinned" providing up to 48HP/136.0kW on a single system.

The KX6 range has a total piping length of 1000m (14HP+) and the furthest indoor unit can be connected up to 160m (8HP+) from the outdoor unit.

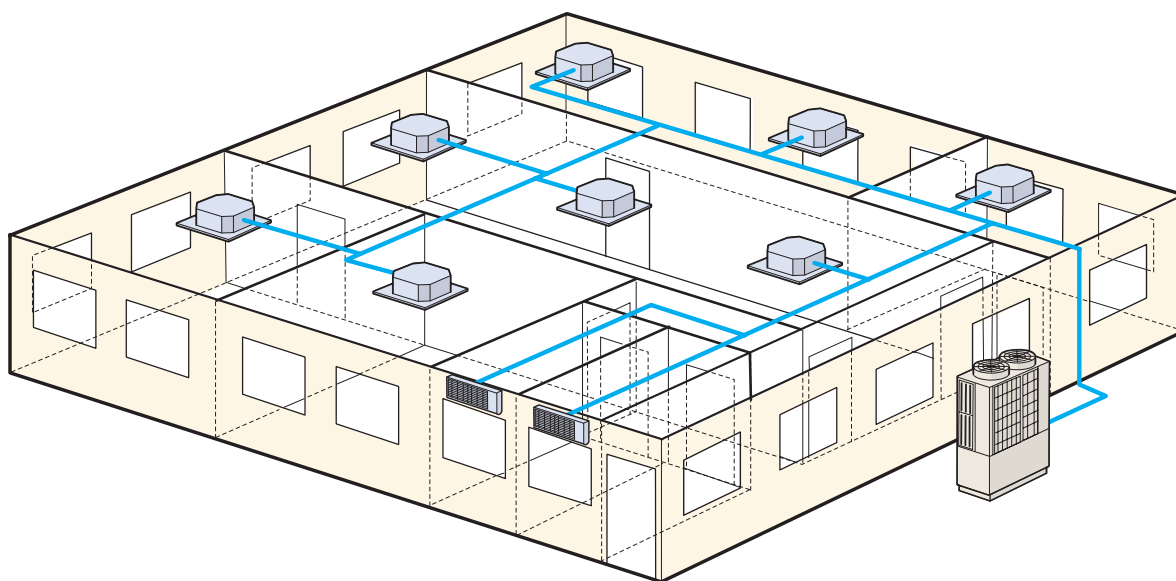

Fixed Cooling mode/fixed heating mode (summer/winter switch):

It is possible to fix the operational mode of the system (either cooling or heating) using a switch (SW3-7) on the outdoor unit PC board - this enables the building user to decide the operation of the system (e.g. cooling only in summer/heating only in winter), to avoid unnecessary energy wastage. It is also possible to wire the control switch to a remote location (inside the building) to a control room, or even linked to an ambient thermostat.

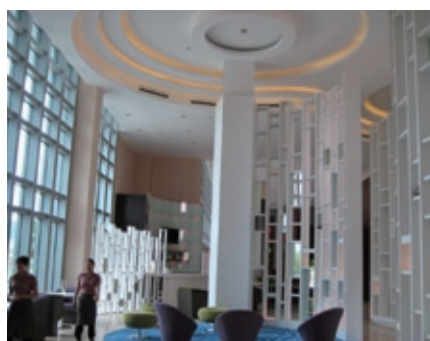



DUCT CONNECTED -Middle Static pressure- **FDUM**

NEW




Automatic external static pressure (E.S.P.) control

Duct design was simplified.

Using DC motor, the most optimum air flow volume can be achieved by this automatic control.

Indoor unit will recognize external static pressure by itself automatically and keep rated air flow volume.

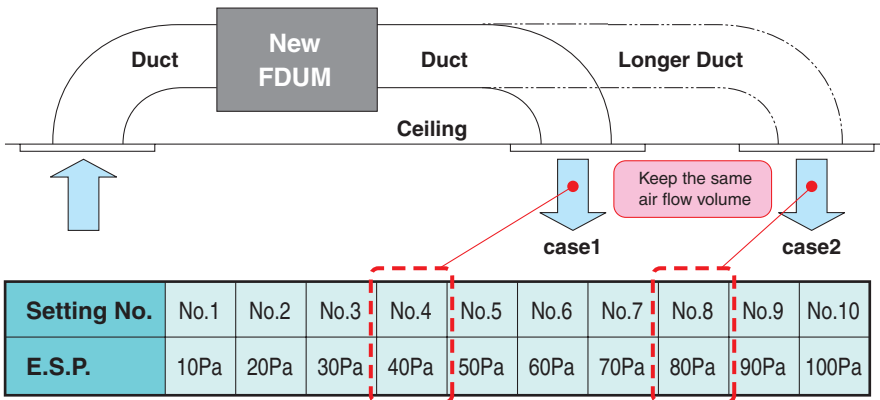

RC-E5

E.S.P. button

External static pressure (E.S.P.) can be set by E.S.P. button.

Ceiling Cassette -2 way- **FDTW**


NEW



Individual flap control system

According to room temperature conditions, four directions air flow can be controlled individually by flap control system.

Due to optimization of outlet design of air flow our new advanced technology, sufficient air flow is secured and long reach of air flow is achieved.

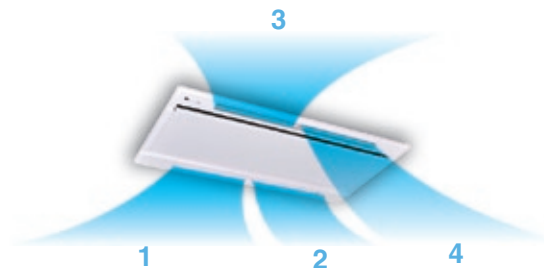

Wireless remote control

For wireless remote control simply insert the infrared receiver kit on a corner of the panel.




RCN-TW-E

Flap control system

The flap can swing within the range of upper and lower flap position selected with wired remote control.

(this system is applied for FDT, FDTC, FDTs, FDK, FDEN, and FDFW type also)



*Wireless remote control and RCH-E3 is not applicable to the Individual flap control system and the Flap control system.


DUCT CONNECTED (thin) -Low Static pressure- FDUT

NEW



Compact design <FDUT15~56KXE6F-E>


Height: 220 → 200mm

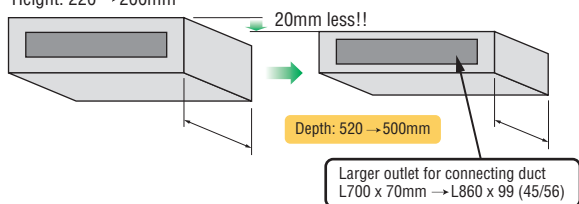


Current Model

New Model


Lower noise <FDUT28KXE6F-E>



※ Measured based on JIS B 8616




Serviceability

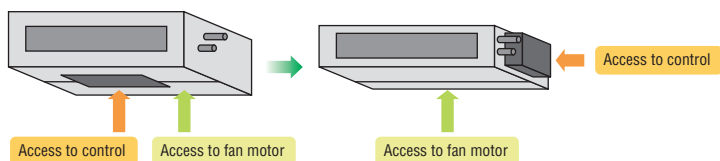

Current Model

New Model



Ceiling Cassette -1 way- FDTS

NEW




Wireless remote control

For wireless remote control simply attach an additional panel with infrared receiver on the right side of the main decorative panel.



Individual flap control system

Two directions of air flow can be controlled individually by flap control system.

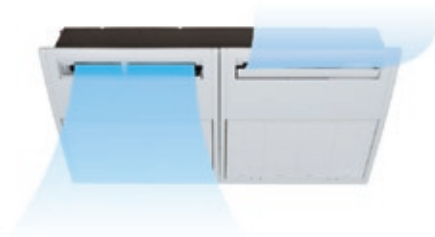




MicrOKX Outdoor units

Heat pump systems 4, 5, 6hp (11.2kW~15.5kW)


Model No.	Nominal Cooling Capacity
FDC112KXEN6	11.2kW (1phase)
FDC140KXEN6	14.0kW (1phase)
FDC155KXEN6	15.5kW (1phase)
FDC112KXES6	11.2kW (3phase)
FDC140KXES6	14.0kW (3phase)
FDC155KXES6	15.5kW (3phase)



- The KX6 heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 8 indoor units/up to 150% capacity.
- High efficiency with COP (in cooling) up to 4.0.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 100m and a maximum pipe run of 70m.

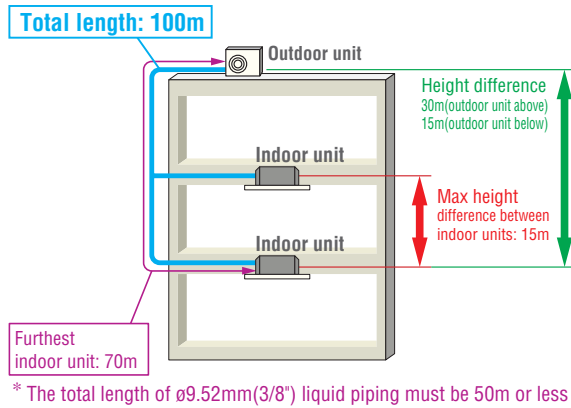

Range of operation

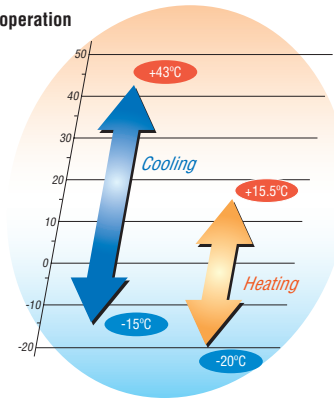

Specifications

Item	Model	FDC112KXEN6	FDC140KXEN6	FDC155KXEN6	FDC112KXES6	FDC140KXES6	FDC155KXES6	
Nominal horse power		4HP	5HP	6HP	4HP	5HP	6HP	
Power source		1 Phase 220-240V, 50Hz			3 Phase 380-415V, 50Hz			
Nominal capacity	Cooling	11.2	14.0	15.5	11.2	14.0	15.5	
	Heating	12.5	16.0	16.3	12.5	16.0	16.3	
Electrical characteristics	Starting current	5						
	Power consumption	Cooling	2.80	4.17	4.71	2.80	4.17	4.71
		Heating	2.89	4.31	4.38	2.89	4.31	4.38
	Running current	Cooling	13.5-12.4	20.6-18.9	23.3-21.3	4.5-4.1	6.9-6.3	7.8-7.1
Heating		14.1-12.9	21.5-19.7	21.9-20.1	4.7-4.3	7.2-6.6	7.3-6.7	
Exterior dimensions	HxWxD	mm 845x970x370						
Net weight		kg 85			kg 87			
Refrigerant charge	R410A	kg 5.0			kg 5.0			
Sound pressure level	Cooling/Heating	dB(A) 52/54	53/55	53/56	52/54	53/55	53/56	
Refrigerant piping size	Liquid line	mm(in) $\varnothing 9.52(3/8")$						
	Gas line	mm(in) $\varnothing 15.88(5/8")$						
Capacity connection		% 80~150						
Number of connectable indoor units		6	8	8	6	8	8	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Refrigerant piping


Outdoor unit (HP)		4	5	6
Gas pipe	Furthest indoor unit =<70m	ø15.88		
Liquid pipe		ø9.52		

Branch pipes



DIS-22-1G/DIS-180-1G



Header pipe



HEAD6-180-1G

Dimensions

All measurements in mm.

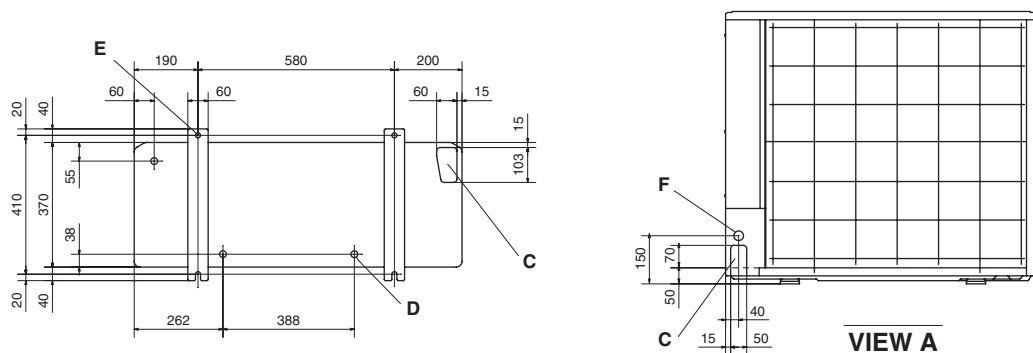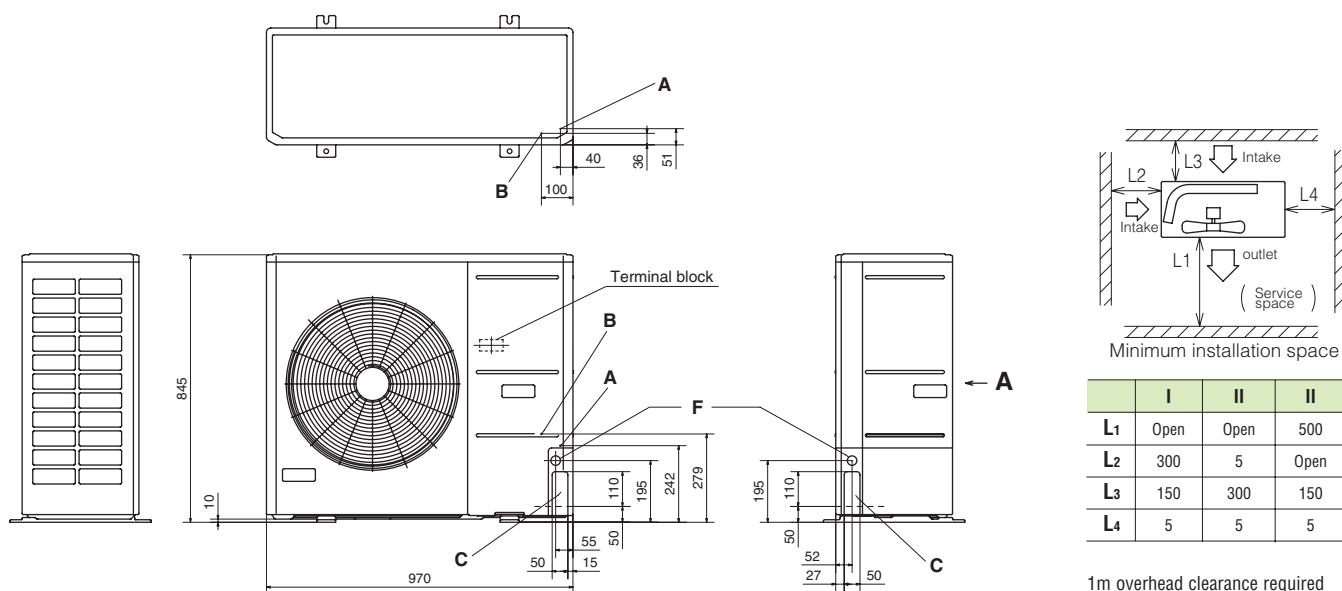

Mark	Item	
A	Service valve connection (gas side)	ø15.88 (5/8") (flare)
B	Service valve connection (liquid line)	ø9.52 (3/8") (flare)
C	Pipe/cable draw-out port	4 places
D	Drain discharge port	ø20 x 3 places
E	Anchor bolt hole	M10 x 4 places
F	Cable draw-out port	ø30 x 3 places

Notes:

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave a 1m or larger space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The unit name plate is attached on the lower right corner of the front panel.




MicroKX Outdoor units

Heat pump systems 8, 10, 12hp (22.4kW~33.5kW)

Model No.	Nominal Cooling Capacity
FDC224KXE6	22.4kW
FDC280KXE6	28.0kW
FDC335KXE6	33.5kW




- The KX6 heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 22 indoor units/up to 150% capacity.
- High efficiency with COP (in cooling) up to 4.0.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 510m and a maximum pipe run of 160m.

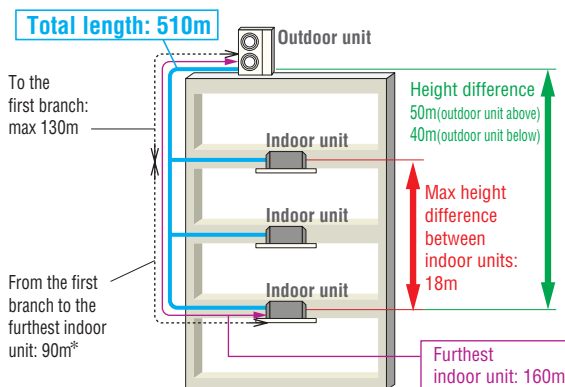

*The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

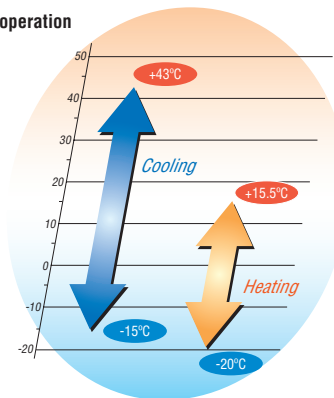

Specifications

Item	Model	FDC224KXE6	FDC280KXE6	FDC335KXE6	
Nominal horse power		8HP	10HP	12HP	
Power source		3 Phase 380-415V, 50Hz			
Nominal capacity	Cooling	22.4	28.0	33.5	
	Heating	25.0	31.5	37.5	
Electrical characteristics	Starting current	5			
	Power consumption	Cooling	5.60	8.09	9.82
		Heating	6.03	8.21	10.12
	Running current	Cooling	9.25-8.47	13.22-12.10	15.87-14.53
Heating		9.85-9.02	13.41-12.28	16.36-14.98	
Exterior dimensions	HxWxD	mm 1675x1080x480			
Net weight	kg	221		224	
Refrigerant charge	R410A	11.5			
Sound pressure level	Cooling/Heating	58/58	59/60	61/61	
Refrigerant piping size	Liquid line	ø9.52(3/8")			
	Gas line	ø19.05(3/4")	ø22.22(7/8")	ø25.4(1") [ø28.58(1 1/8")]	
Capacity connection	%	50~150			
Number of connectable indoor units		15	19	22	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Refrigerant piping

Outdoor unit (HP)		8	10	12
Gas pipe	Furthest indoor unit =<90m	ø19.05	ø22.22	ø28.58
Liquid pipe		ø9.52		ø12.7
Gas pipe	Furthest indoor unit =<90m	ø22.22		ø28.58
Liquid pipe		ø12.7		

Branch pipes



DIS-22-1G/DIS-180-1G



DIS-371-1G



Header pipe









HEAD6-180-1G

Dimensions

All measurements in mm.



	I	II	III
L1	Open	Open	1500
L2	300	5	Open
L3	300	300	300
L4	5	5	5

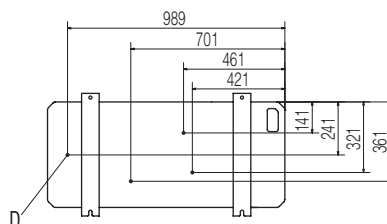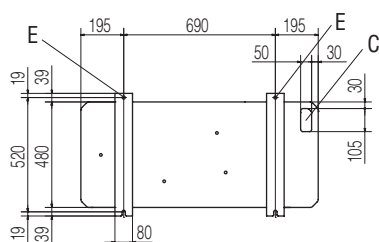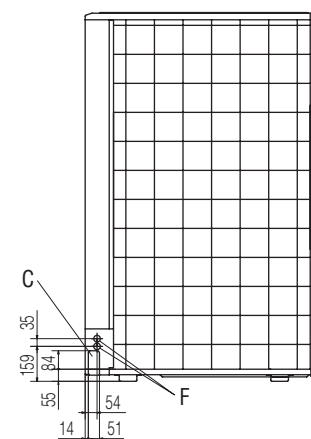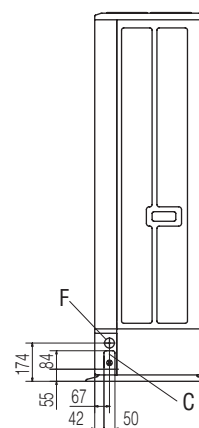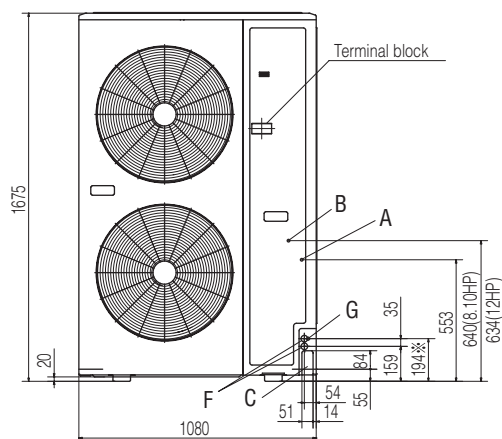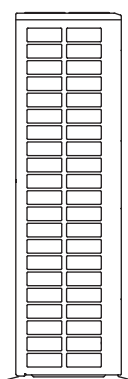

Mark	Item	FDC224KXE6	FDC280KXE6	FDC335KXE6
A	Service valve connection of the attached connecting pipe (gas side)	ø19.05 (3/4") (Flare)	ø19.05 (3/4") (Flare)	ø19.05 (3/4") (Flare)
B	Service valve connection (liquid side)	ø9.52 (3/8") (Flare)	ø9.52 (3/8") (Flare)	ø12.7 (1/2") (Flare)
C	Pipe/cable draw-out hole	4places	4places	4places
D	Drain discharge hole	ø20 × 4places	ø20 × 4places	ø20 × 4places
E	Anchor bolt hole	M10 × 4places	M10 × 4places	M10 × 4places
F	Cable draw-out hole	ø30 × 2places (front) ø45 (side) ø30 × 2places (back)	ø30 × 2places (front) ø30 × 2places (side) ø30 × 2places (back)	ø30 × 2places (front) ø45 (side) ø30 × 2places (back)
G	Connecting position of the local pipe. (gas side)	ø19.05 (3/4")(Brazing)	ø22.22 (7/8")(Brazing)	ø25.4 (1")(Brazing)

Notes:

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave a 1m or larger space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The model name label is attached on the lower right corner of the front.
- (7) Connect the Service valve with local pipe by using the pipe of the attachment.(Gas side only)
- (8) Mark ※ shows the connecting position of the local pipe.(Gas side only)



KX6 Outdoor units


Heat pump systems 14, 16hp (40.0kW~45.0kW)

Model No.	Nominal Cooling Capacity
FDC400KXE6	40.0kW
FDC450KXE6	45.0kW




Uniform footprint of models (14,16hp) allows continuous side-by-side installation

- The KX6 heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 40 indoor units/up to 200% capacity.
- High efficiency with COP (in cooling) up to 3.6.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

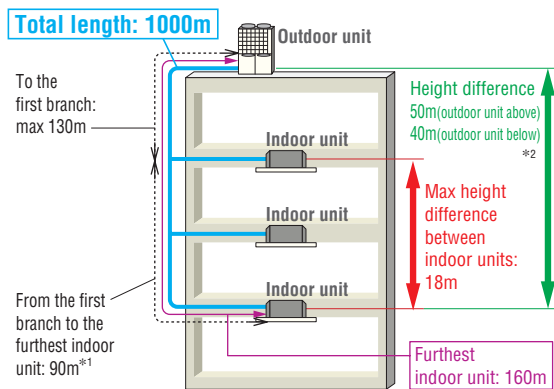

*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.
 *2 Height difference up to 90m is possible with High Head series. Please refer to page 92.

Range of operation

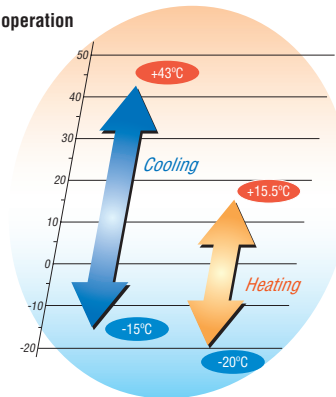


Specifications

Item		Model	FDC400KXE6	FDC450KXE6
Nominal horse power			14HP	16HP
Power source			3 Phase 380-415V, 50Hz	
Nominal capacity	Cooling	kW	40.0	45.0
	Heating		45.0	50.0
Electrical characteristics	Starting current		8	
	Power consumption	Cooling	11.27	12.97
		Heating	11.73	13.10
	Running current	Cooling	18.4-16.9	21.1-19.3
Heating		19.6-17.9	21.7-19.9	
Exterior dimensions	HxWxD	mm	1690x1350x720	
Net weight		kg	334	
Refrigerant charge	R410A	kg	11.5	
Sound pressure level	Cooling/Heating	dB(A)	59.5/60	62.5/62.5
Refrigerant piping size	Liquid line	mm(in)	ø12.7(1/2")	
	Gas line		ø25.4(1") [ø28.58(1 1/8")]	
Capacity connection		%	50~200	
Number of connectable indoor units			36	40

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Dimensions


All measurements in mm.

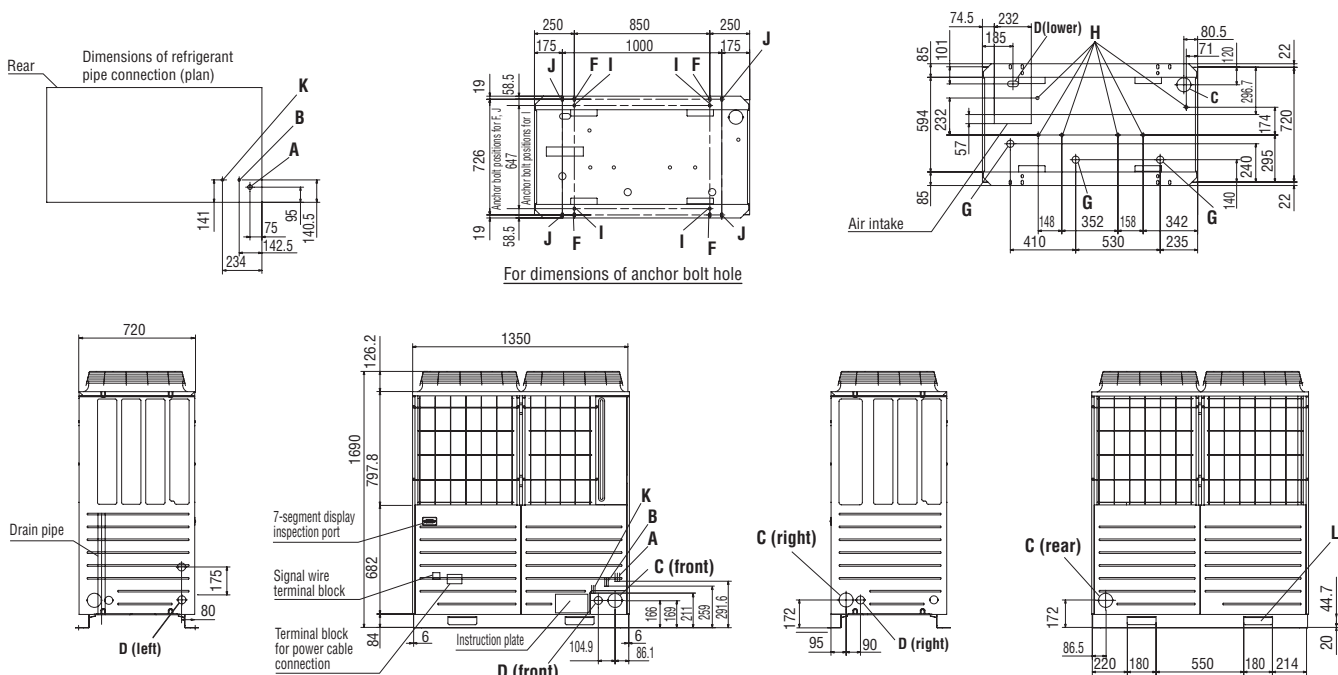

Mark	Item	
A	Service valve connection (gas side)	For refrigerant piping, please refer to the unit specifications.
B	Service valve connection (liquid line)	
C	Refrigerant pipe draw-out port	ø88
D	Power cable draw-in port	ø50
F	Anchor bolt hole	M10 x 4 places
G	Drain hose hole	ø45 x 3 places
H	Drain discharge port	ø20 x 6 places
K*	Oil-equalising pipe joint	ø3/8" flare
L	Sling holes for haulage or hoisting	180 x 44.7

*14, 16HP models only

Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	200
L ₃	100	300
L ₄	10	Open
H ₁	1500	-
H ₂	No restrictions	No restrictions
H ₃	1000	No restrictions
H ₄	No restrictions	-




2m overhead clearance required

Notes:

- The unit must be fixed with anchor bolts.
- Leave a 2m or larger space above the unit.
- The unit name plate is attached on the lower right corner of the front panel.
- The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
- Use a ø88 port for refrigerant pipe connection.
- Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
- The oil-equalising pipe K should be used when outdoor units are used in combination. (For 14,16Hp only)

When more than one unit is installed

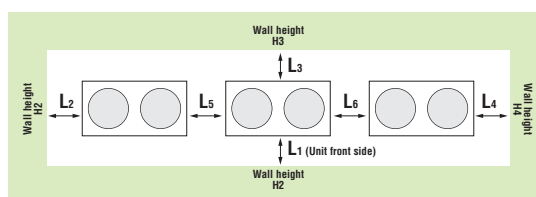

Installation example		
Dimensions	A	B
L ₁	500	Open
L ₂	10	200
L ₃	100	300
L ₄	10	Open
L ₅	0	400
L ₆	0	400
H ₁	1500	No restrictions
H ₂	No restrictions	No restrictions
H ₃	1000	No restrictions
H ₄	No restrictions	No restrictions



KX6 Outdoor units


Heat pump systems 18, 20, 22, 24hp (50.4kW~68.0kW)

Model No.	Nominal Cooling Capacity
FDC504KXE6	50.4kW
FDC560KXE6	56.0kW
FDC615KXE6	61.5kW
FDC680KXE6	68.0kW


- The KX6 heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 49 indoor units/up to 160% capacity.
- High efficiency with COP (in cooling) up to 3.4.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.



Uniform footprint of all models (from 8hp~24hp) allows continuous side-by-side installation

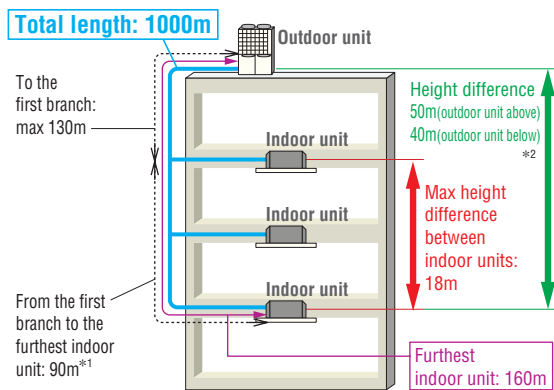

*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.
 *2 Height difference up to 90m is possible with High Head series. Please refer to page 92.

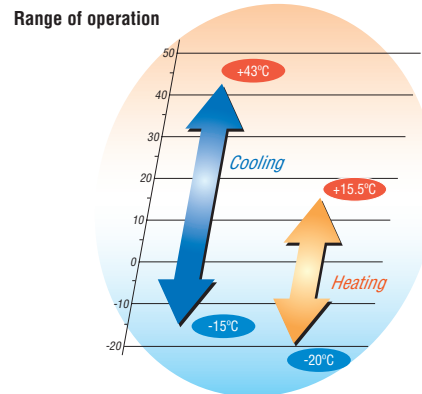


Specifications

Item	Model	FDC504KXE6	FDC560KXE6	FDC615KXE6	FDC680KXE6	
Nominal horse power		18HP	20HP	22HP	24HP	
Power source		3 Phase 380~415V, 50Hz				
Nominal capacity	Cooling	50.4	56.0	61.5	68.0	
	Heating	56.5	63.0	69.0	73.0	
Electrical characteristics	Starting current	8				
	Power consumption	Cooling	14.73	16.79	20.37	24.98
		Heating	15.12	16.79	18.48	19.08
	Running current	Cooling	24.1~22.0	27.4~25.1	33.1~30.3	40.3~36.9
Heating		25.2~23.1	28.0~25.7	30.7~28.1	31.6~29.0	
Exterior dimensions	HxWxD	mm 2048x1350x720				
Net weight	kg	356		375		
Refrigerant charge	R410A	kg 11.5				
Sound pressure level	Cooling/Heating	61.5/62.0	63.0/63.5	64.5/64.0	65.0/65.0	
Refrigerant piping size	Liquid line	mm(in) ø12.7(1/2")				
	Gas line	mm(in) ø28.58(1 1/8")				
Capacity connection	%	50~160				
Number of connectable indoor units		36	40	44	49	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.


Dimensions

All measurements in mm.

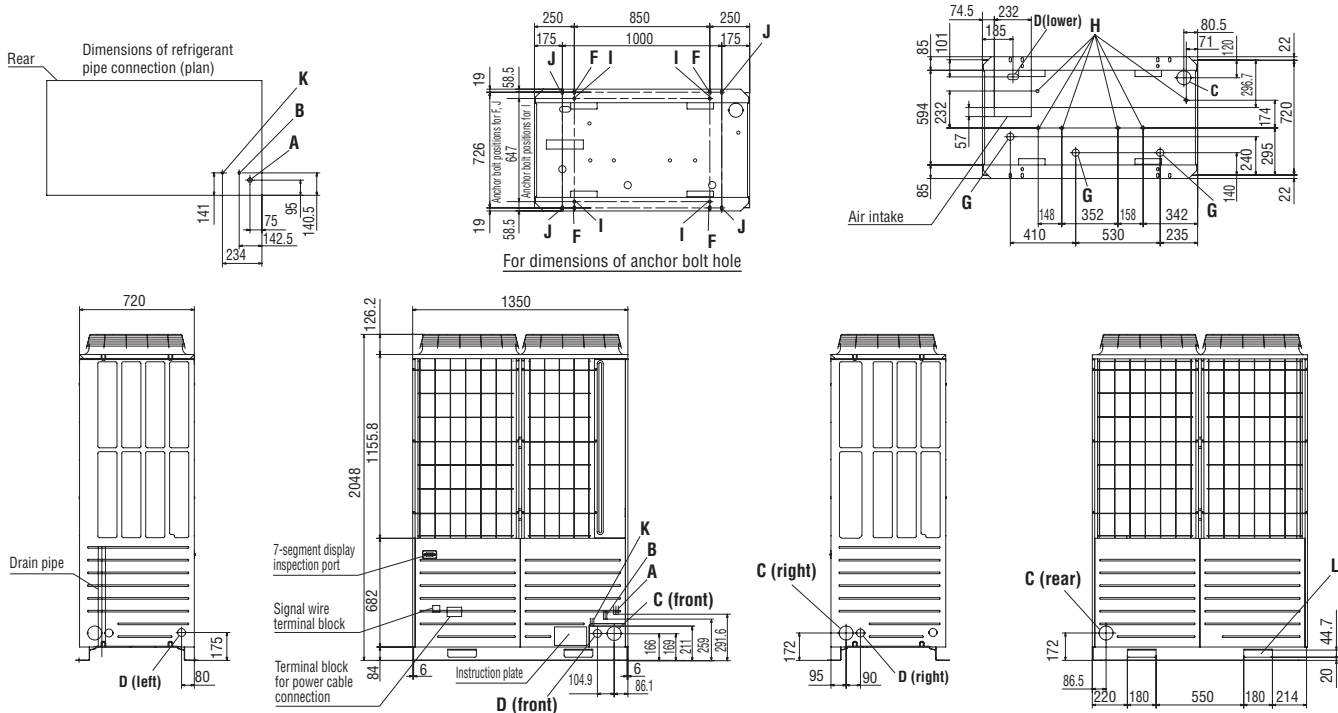

Mark	Item	
A	Service valve connection (gas side)	For refrigerant piping, please refer to the unit specifications.
B	Service valve connection (liquid line)	
C	Refrigerant pipe draw-out port	ø100
D	Power cable draw-in port	ø50
F	Anchor bolt hole	M10 x 4 places
G	Drain hose hole	ø45 x 3 places
H	Drain discharge port	ø20 x 6 places
K	Oil-equalising pipe joint	ø9.52 flare
L	Sling holes for haulage or hoisting	180 x 44.7

Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	200
L ₃	100	300
L ₄	10	Open
H ₁	1500	-
H ₂	No restrictions	No restrictions
H ₃	1000	No restrictions
H ₄	No restrictions	-



Notes:

- (1) The unit must be fixed with anchor bolts.
- (2) Leave a 2m or larger space above the unit.
- (3) The unit name plate is attached on the lower right corner of the front panel.
- (4) The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
- (5) Use a ø88 port for refrigerant pipe connection.
- (6) Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
- (7) The oil-equalising pipe K should be used when outdoor units are used in combination.



KX6 Outdoor units

Heat pump combination systems

26, 28, 30, 32hp (73.5kW~90.0kW)




Model No.	Nominal Cooling Capacity
FDC735KXE6 (FDC335-K+FDC400)	73.5kW
FDC800KXE6 (FDC400x2)	80.0kW
FDC850KXE6 (FDC400+FDC450)	85.0kW
FDC900KXE6 (FDC450x2)	90.0kW

- The KX6 heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 65 indoor units/up to 160% capacity.
- High efficiency with COP (in cooling) up to 3.6.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 8hp~24hp) allows continuous side-by-side installation

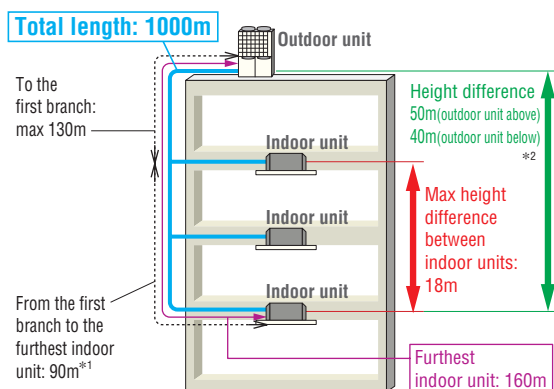

*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.
 *2 Height difference up to 90m is possible with High Head series. Please refer to page 92.

Range of operation

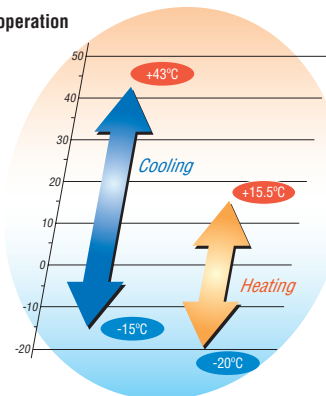


Specifications

Item	Model	FDC735KXE6	FDC800KXE6	FDC850KXE6	FDC900KXE6	
Combination (FDC)		335KXE6-K	400KXE6	400KXE6	450KXE6	
		400KXE6	400KXE6	450KXE6	450KXE6	
Nominal horse power		26HP	28HP	30HP	32HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	73.5	80.0	85.0	90.0	
	Heating	82.5	90.0	95.0	100.0	
Electrical characteristics	Starting current	A 16				
	Power consumption	Cooling	20.21	22.54	24.24	25.94
		Heating	20.66	23.46	24.83	26.20
	Running current	Cooling	32.9-30.2	36.8-33.8	39.5-36.2	42.2-38.6
Heating		34.4-31.4	39.2-35.8	41.3-37.8	43.4-39.8	
Exterior dimensions	HxWxD	mm 1690x2700x720				
Net weight		kg 334x2				
Refrigerant charge	R410A	kg 11.5x2				
Refrigerant piping size	Liquid line	mm(in) ø15.88(5/8")				
	Gas line	mm(in) ø31.8(1 1/4") [ø34.92(1 3/8")]				
Capacity connection		% 50~160				
Number of connectable indoor units		53	58	61	65	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Dimensions

All measurements in mm.

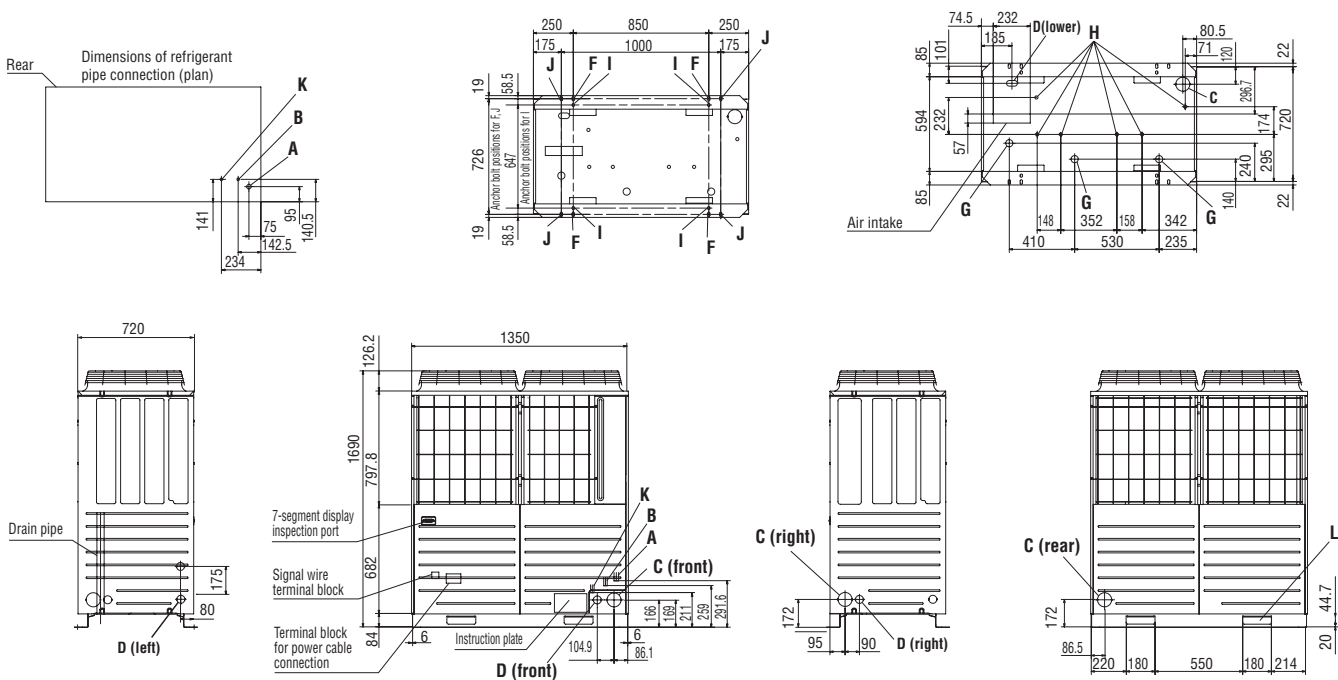

Mark	Item	
A	Service valve connection (gas side)	For refrigerant piping, please refer to the unit specifications.
B	Service valve connection (liquid line)	
C	Refrigerant pipe draw-out port	ø88
D	Power cable draw-in port	ø50
F	Anchor bolt hole	M10 x 4 places
G	Drain hose hole	ø45 x 3 places
H	Drain discharge port	ø20 x 6 places
K	Oil-equalising pipe joint	ø3/8" flare
L	Sling holes for haulage or hoisting	180 x 44.7

Notes:

- (1) The unit must be fixed with anchor bolts.
- (2) Leave a 2m or larger space above the unit.
- (3) The unit name plate is attached on the lower right corner of the front panel.
- (4) The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
- (5) Use a ø88 port for refrigerant pipe connection.
- (6) Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
- (7) The oil-equalising pipe K should be used when outdoor units are used in combination.



KX6 Outdoor units


Heat pump combination systems

34, 36, 38, 40, 42, 44, 46, 48hp (96.0kW~136.0kW)

Model No.	Nominal Cooling Capacity
FDC960KXE6 (FDC450+FDC504)	96.0kW
FDC1010KXE6 (FDC504x2)	101.0kW
FDC1065KXE6 (FDC504+FDC560)	106.5kW
FDC1130KXE6 (FDC560x2)	113.0kW
FDC1180KXE6 (FDC560-K+FDC615)	118.0kW
FDC1235KXE6 (FDC615x2)	123.5kW
FDC1300KXE6 (FDC615+FDC680)	130.0kW
FDC1360KXE6 (FDC680x2)	136.0kW




- The KX6 heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 80 indoor units/up to 130% (960KXE6:160%) capacity.
- High efficiency with COP (in cooling) up to 3.5.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

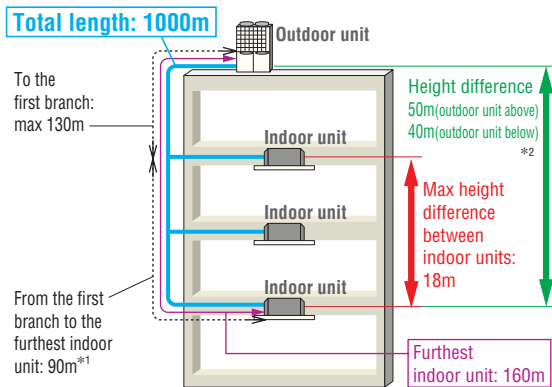

*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.
 *2 Height difference up to 90m is possible with High Head series. Please refer to page 92.

Range of operation

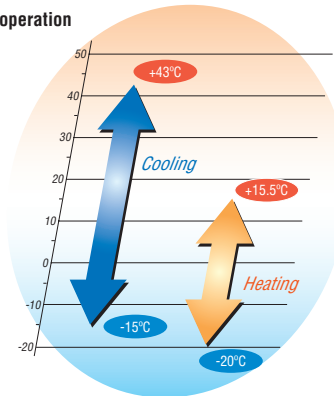


Specifications

Item	Model	FDC960KXE6	FDC1010KXE6	FDC1065KXE6	FDC1130KXE6	FDC1180KXE6	FDC1235KXE6	FDC1300KXE6	FDC1360KXE6	
Combination (FDC)		450KXE6	504KXE6	504KXE6	560KXE6	560KXE6-K	615KXE6	615KXE6	680KXE6	
		504KXE6	504KXE6	560KXE6	560KXE6	615KXE6	615KXE6	680KXE6	680KXE6	
Nominal horse power		34HP	36HP	38HP	40HP	42HP	44HP	46HP	48HP	
Power source		3 Phase 380-415V, 50Hz								
Nominal capacity	Cooling	96.0	101.0	106.5	113.0	118.0	123.5	130.0	136.0	
	Heating	108.0	113.0	119.5	127.0	132.0	138.0	142.0	146.0	
Electrical characteristics	Starting current	A 16								
	Power consumption	Cooling	27.70	29.46	31.52	33.58	37.16	40.74	45.35	49.96
		Heating	28.22	30.24	31.91	33.58	35.27	36.96	37.56	38.16
	Running current	Cooling	45.2-41.3	48.2-44.0	51.5-47.1	54.8-50.2	60.5-55.4	66.2-60.6	73.4-67.2	80.6-73.8
Heating		46.9-43.0	50.4-46.2	53.2-48.8	56.0-51.4	58.7-53.8	61.4-56.2	62.3-57.1	63.2-58.0	
Exterior dimensions	HxWxD	mm 2048x2700x720								
Net weight	kg	334+356		356x2			375x2			
Refrigerant charge	R410A	kg 11.5x2								
Refrigerant piping size	Liquid line	ø15.88(5/8")			ø19.05(3/4")					
	Gas line	mm(in) ø34.92(1 3/8")								
Capacity connection	%	50~160		50~130						
Number of connectable indoor units		69	59	62	66	69	72	76	80	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Dimensions

All measurements in mm.

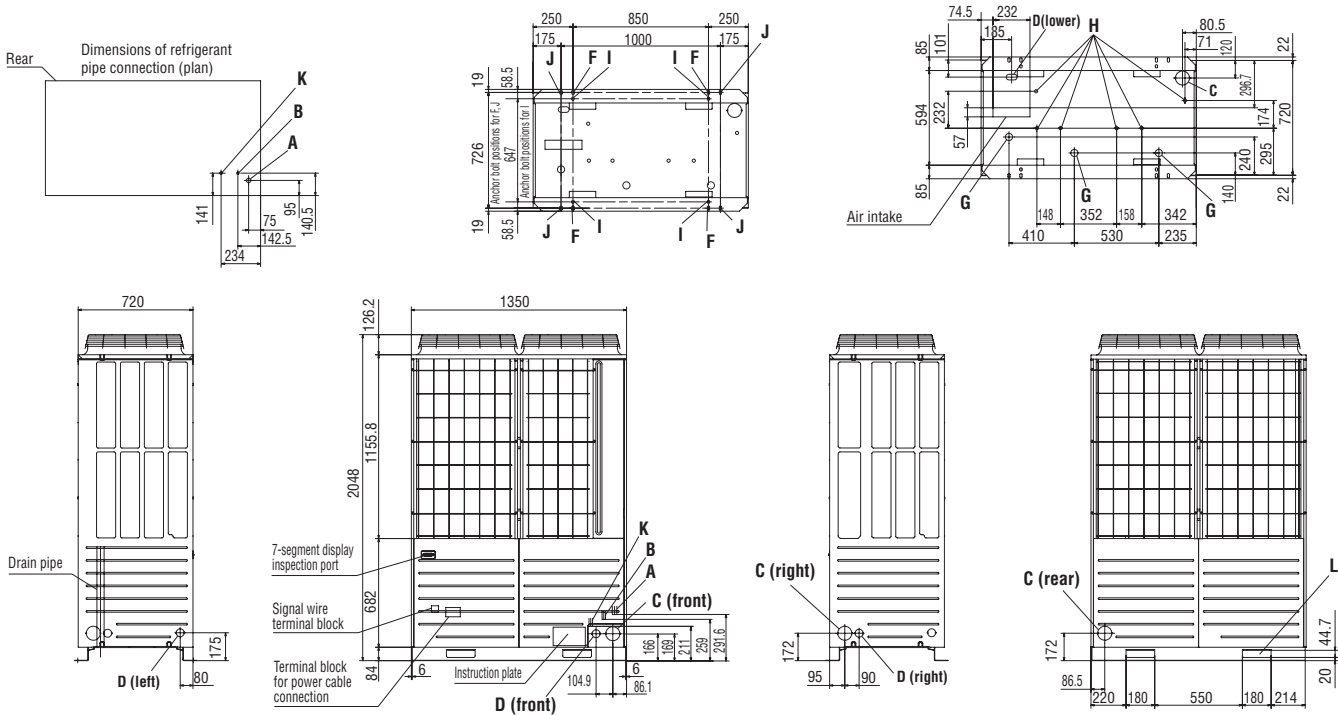

Mark	Item	
A	Service valve connection (gas side)	For refrigerant piping, please refer to the unit specifications.
B	Service valve connection (liquid line)	
C	Refrigerant pipe draw-out port	ø100
D	Power cable draw-in port	ø50
F	Anchor bolt hole	M10 x 4 places
G	Drain hose hole	ø45 x 3 places
H	Drain discharge port	ø20 x 6 places
K	Oil-equalising pipe joint	ø9.52 flare
L	Sling holes for haulage or hoisting	180 x 44.7

- Notes:
- (1) The unit must be fixed with anchor bolts.
 - (2) Leave a 2m or larger space above the unit.
 - (3) The unit name plate is attached on the lower right corner of the front panel.
 - (4) The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
 - (5) Use a ø88 port for refrigerant pipe connection.
 - (6) Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
 - (7) The oil-equalising pipe K should be used when outdoor units are used in combination.



KX6 refrigerant piping

Installation of Interconnecting Pipework

Mitsubishi KX6 equipment is manufactured to the highest standards of quality and reliability. It is imperative the method of installation and the materials used are also to high standards, to ensure trouble free operation and long term reliability.

The interconnecting pipework must be installed by a competent and trained engineer. Refrigeration quality copper tube must be used, soft copper coils or half-hard straight lengths. The refrigeration quality tube must be soft drawn seamless high grade copper pipe. The copper tube must be selected taking into account the higher operating pressures of R410A refrigerant, and that high pressures will occur throughout the system because of the reverse cycle operation. All pipework material used should be EN12735 European standard.

The supplied branch pipe kits, must be used to make connections to indoor units, and the supplied manifold kits must be used to make connections between outdoor units (where applicable); it is not permitted to use standard fittings such as elbows, tees etc. The branch pipes shall be installed in accordance with the manufacturer's instructions, allowing unrestricted flow of refrigerant, and in accordance with European standard E378:2000. All brazed joints shall be made with dry nitrogen purge to ensure the prevention of oxidation to the internal surface of the copper pipes.



The ingress of moisture, dirt and any other contaminants to the interior of the copper pipes, and air conditioning units, must be prevented during the installation procedure. After the installation of pipework, prior to the

connection of the outdoor units, and sealing of insulation joints, the pipework must be pressure tested for leakage, using dry nitrogen.

Additional Refrigerant

Additional R410A refrigerant only shall be used, and must be charged by weight only, using electronic scales. The amount of additional refrigerant must be accurately calculated from the manufacturer's data, based on the length and diameter of each section of the liquid refrigerant pipework of the system.

Single outdoor unit piping examples:

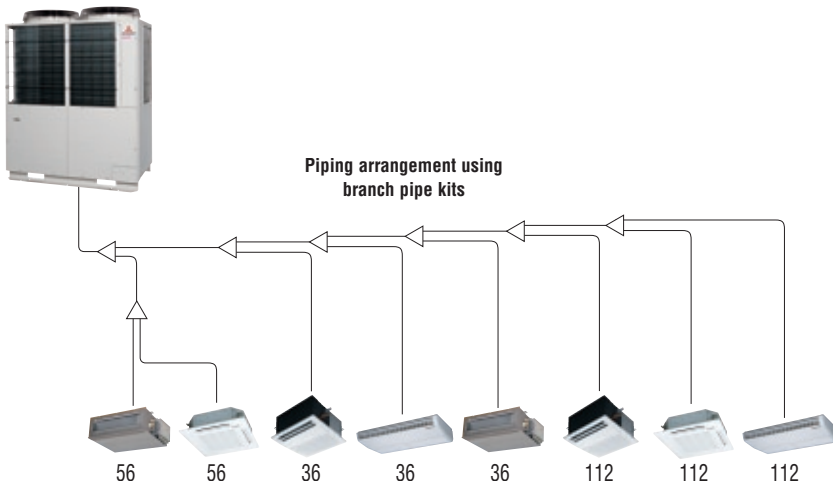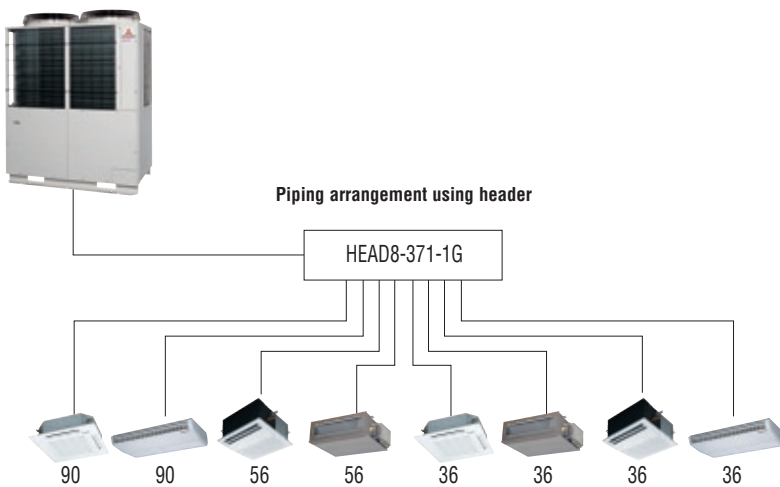

Liquid pipe
Gas pipe

KX6 refrigerant piping

Pipe sizes applicable to European installations.

Outdoor unit (HP)		8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48
Liquid pipe	Furthest indoor unit =<90m	ø9.52		ø12.7						ø15.88						ø19.05						
Gas pipe		ø19.05	ø22.22	ø28.58						ø34.92												
Liquid pipe	Furthest indoor unit =>90m	ø12.7		ø15.88						ø19.05						ø22.22						
Gas pipe		ø22.22	ø28.58								ø34.92											

mm	inch	mm	inch
ø9.52	3/8"	ø28.58	1 1/8"
ø12.7	1/2"	ø31.8	1 1/4"
ø15.88	5/8"	ø34.92	1 3/8"
ø19.05	3/4"	ø38.1	1 1/2"
ø22.22	7/8"	ø44.5	1 3/4"
ø25.4	1"	ø50.8	2"

Branch pipes



DIS-22-1G/DIS-180-1G



DIS-371-1G/DIS-540-2G

Header pipe




HEAD6-180-1G



Combination outdoor unit manifold



DOS-2A-1G

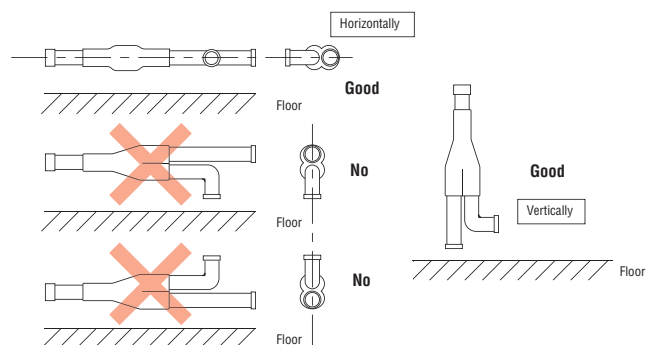

Combination outdoor unit piping examples:

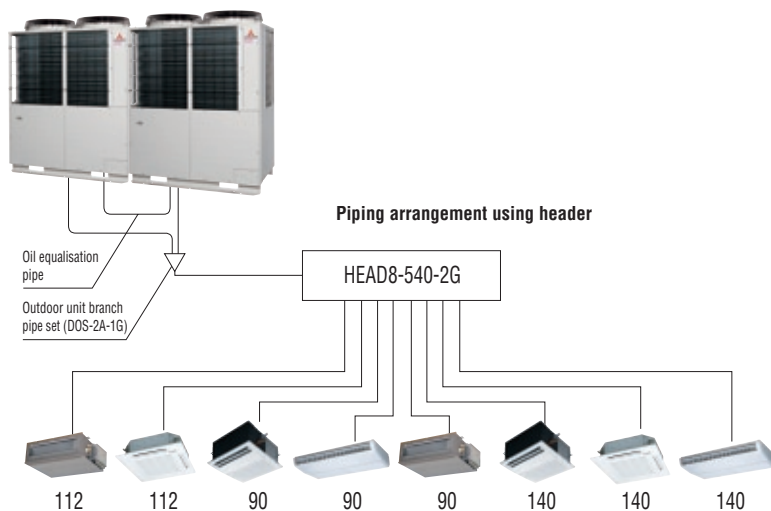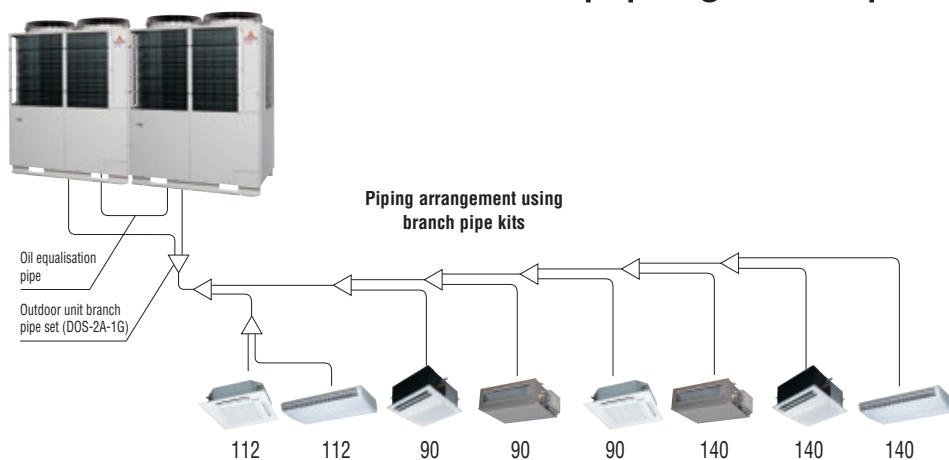

Outdoor unit's branching piping

Outdoor unit	Branch piping set
2 units (for 735~1360)	DOS-2A-1G

Indoor unit's first branching piping

Total capacity of indoor units	Branch piping set	Header set	
		Model	Branches
~179	DIS-22-1G	HEAD4-22-1G	Max 4 branches
180~370	DIS-180-1G	HEAD6-180-1G	Max 6 branches
371~539	DIS-371-1G	HEAD8-371-1G	Max 8 branches
540~	DIS-540-2G	HEAD8-540-2G	Max 8 branches



KX6 electrical wiring – power supply


KX6 new design includes greatly simplified wiring requirements utilising a ‘polarity-free’ two wire control loop connecting the indoor units.

Power wiring

Cables can be laid through the front, right, left or bottom of the outdoor unit casing.

Separate power supplies should be used for the outdoor unit (3/phase) and the indoor units (1/phase).


Only control wiring is connected from outdoor to indoor unit.

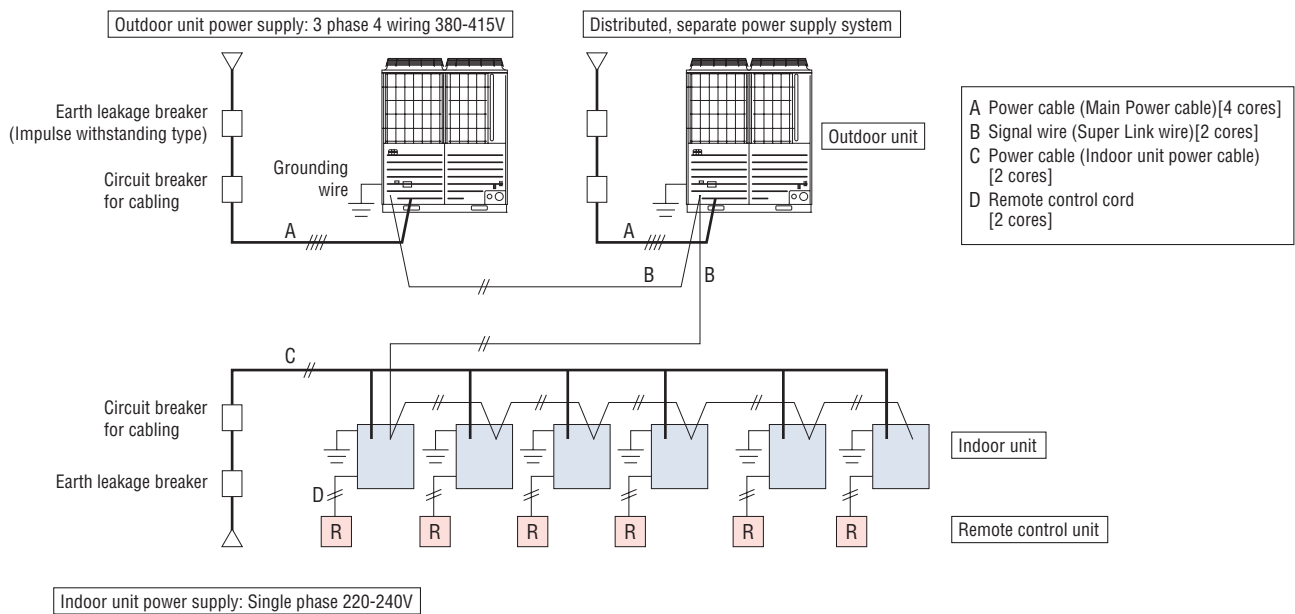

CAUTION

If the earth leakage breaker is exclusively for ground fault protection, then you will need to install a circuit breaker for wiring work.

KX6 outdoor unit mechanical compartment

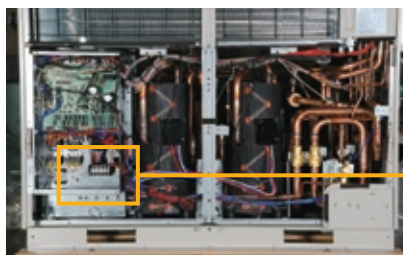

Electrical component box



Outdoor unit power supply terminal block

KX6 electrical wiring – control wiring

1. The control wiring is 5 Volt DC, non-polarised, two wire connection notated as 'A1' and 'B1'. This 'AB' wiring connects outdoor unit to indoor unit and indoor unit to indoor unit.

2. This wiring must be a 2-core shielded cable size 0.75mm² or 1.25mm².


	0.75mm ²	1.25mm ²
~1000m	YES	YES
1000~1500m	YES	NO

3. We recommend the both ends of the shield of the cable are connected to ground (earth) at all the indoor units and outdoor units.


4. When plural outdoor units are used,
 •Connect the signal cable between indoor and outdoor units and the signal cable between outdoor units belonging to the same refrigerant line to A1 and B1.
 •Connect the signal line between outdoor units on different refrigerant lines to A2 and B2.

5. For current specification of 2-core (AB) wiring, please consult your MHI dealer.


(1) When one outdoor unit is used

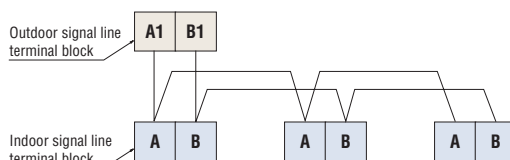

○ Indoor and outdoor signal line do not have a polarity. Any of the connections in the following illustration can be made.




(2) When plural outdoor units are used

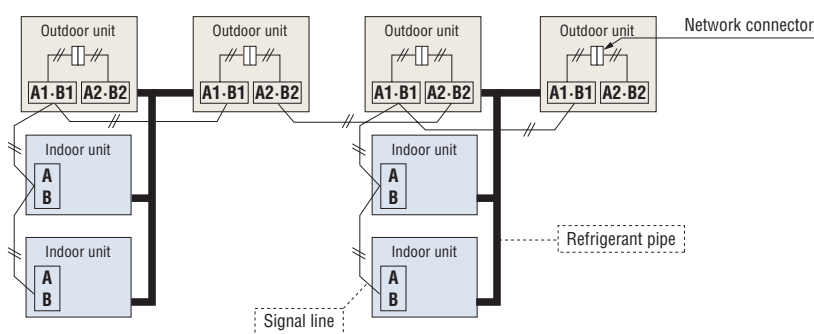


- (a) The maximum number of indoor units that can be connected in a system is 128 and it is possible to configure outdoor units and/or indoor units as an outdoor or indoor unit group connected with each other with two wires.
- (b) The signal wires can also be connected using the method shown below.

(3) The signal lines can also be connected using the method shown below.

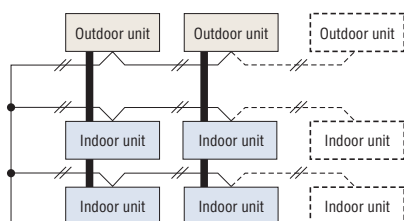

Important

○ Loop wiring prohibited

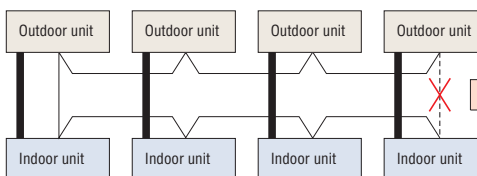


The signal lines cannot form a loop, so the wirings shown as ----- in the diagram are prohibited.

Remote control wiring specifications

For interconnecting wiring between the remote control and indoor units (XY wiring) use 2-core cable size 0.3mm². The maximum length of 2-core cable is 600 metres. Where the 2-core wiring exceeds 100m, use the wire size detailed on the table opposite.

Length (m)	Wire size
100 to 200	0.5mm ² x 2 core
To 300	0.75mm ² x 2 core
To 400	1.25mm ² x 2 core
To 600	2.0mm ² x 2 core

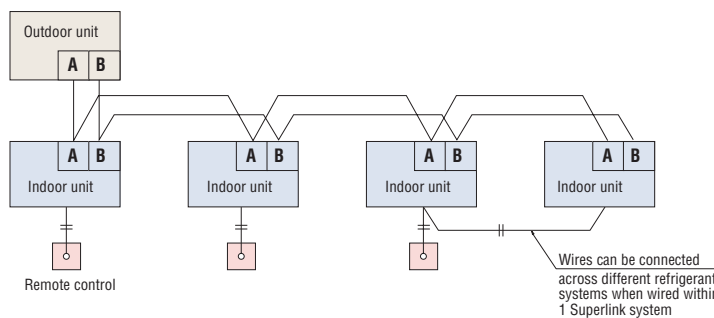



KXR6 heat recovery systems - for simultaneous heating and cooling

KXR6 heat recovery systems operate with 3 inter-connecting pipes, thus commonly referred to as a '3-pipe system'.

KXR6 systems provide both heating and cooling operations to individual indoor units according to the room condition/requirement.

KXR6 incorporates highly sophisticated control to condition multiple indoor areas, whatever their requirement for cooling or heating, for applications

where the building orientation (N, S, E, W) can mean that heat gain/loss varies on each side of the building.

The range starts from the 8hp model (22.4kW) cooling capacity, up to the largest capacity single outdoor unit in the industry (24hp) with 68.0kW cooling capacity. Outdoor units can also be "twinned" providing up to 48HP/136.0kW on a single system.



KXR6

8HP	10HP	12HP	12HP	14HP	16HP
FDC224KXRE6	FDC280KXRE6	FDC335KXRE6	FDC335KXRE6-K	FDC400KXRE6	FDC450KXRE6
18HP	20HP	20HP	22HP	24HP	
FDC504KXRE6	FDC560KXRE6	FDC560KXRE6-K	FDC615KXRE6	FDC680KXRE6	

KXR6

26HP	28HP	30HP	32HP	34HP	36HP
FDC735KXRE6	FDC800KXRE6	FDC850KXRE6	FDC900KXRE6	FDC960KXRE6	FDC1010KXRE6
12+14	14+14	14+16	16+16	16+18	18+18
FDC335KXRE6-K FDC400KXRE6	FDC400KXRE6 FDC400KXRE6	FDC400KXRE6 FDC450KXRE6	FDC450KXRE6 FDC450KXRE6	FDC450KXRE6 FDC504KXRE6	FDC504KXRE6 FDC504KXRE6
38HP	40HP	42HP	44HP	46HP	48HP
FDC1065KXRE6	FDC1130KXRE6	FDC1180KXRE6	FDC1235KXRE6	FDC1300KXRE6	FDC1360KXRE6
18+20	20+20	20+22	22+22	22+24	24+24
FDC504KXRE6 FDC560KXRE6	FDC560KXRE6 FDC560KXRE6	FDC560KXRE6-K FDC615KXRE6	FDC615KXRE6 FDC615KXRE6	FDC615KXRE6 FDC680KXRE6	FDC680KXRE6 FDC680KXRE6

1. 12HP, 20HP, 22HP & 24HP are applied 3D compressor.
2. FDC335KXRE6-K & FDC560KXRE6-K are only used for combining with other models.


Capacity connection

HP	KXR4	HP	KXR6
8~12	130%	8~16	200%
14,16	130%	18~34	160%
18~34	130%	36~48	130%
36~48	130%		

- In case that capacity connection is more than 130%, additional charge of refrigerant is required on site.
- In case of 8-34HP of KXR6 system, if one or more indoor units of FDK, FDFL, FDFU and/or FDFW series are connected to the system, the total connecting capacity of indoor units should not exceed 130%.


Up to 80 indoor units can be connected to the largest capacity outdoor unit, with a range of 16 types of exposed or concealed indoor unit, in several capacities, a choice of 80 indoor units is available.



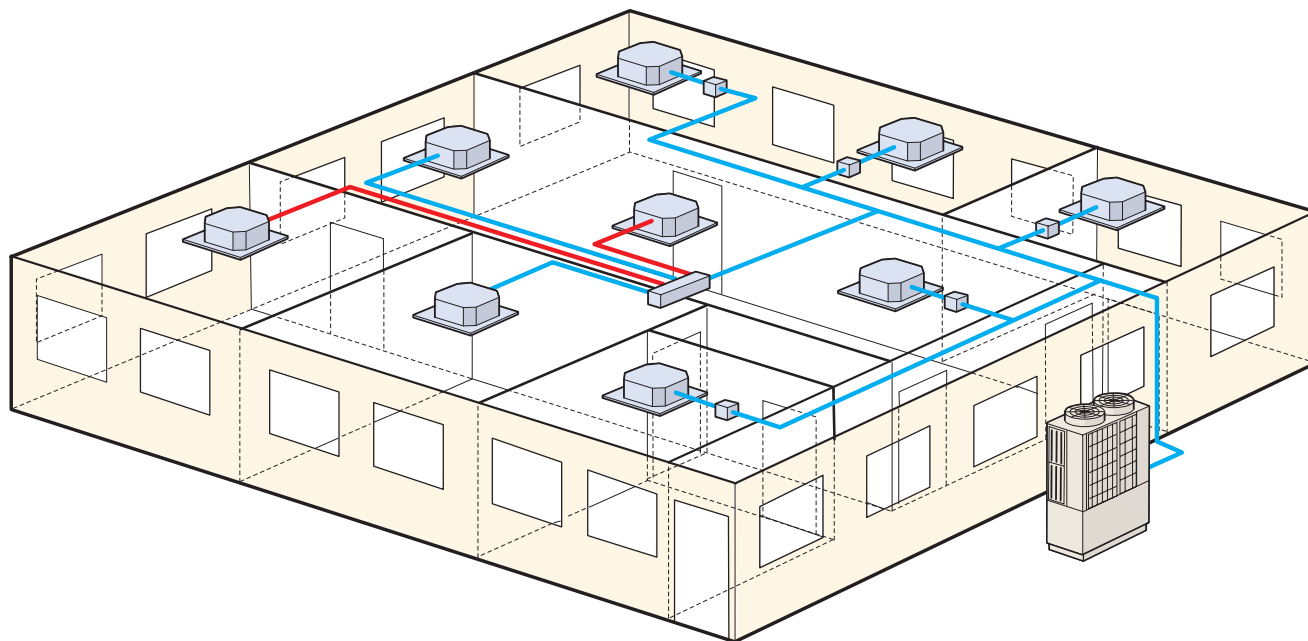

KXR6 heat recovery systems - for simultaneous heating and cooling

The KXR6 system interconnecting pipework has a unique arrangement, with two of the interconnecting pipes routed through a PFD Distribution Controller, and the third pipe connected directly to each indoor unit from the main pipe run. This reduces installation time, and the number of brazed connections on site. The PFD Distribution Controllers are available for single connection, or as a combined PFD 4-way connection, with each connected unit having independent cooling or heating operation.

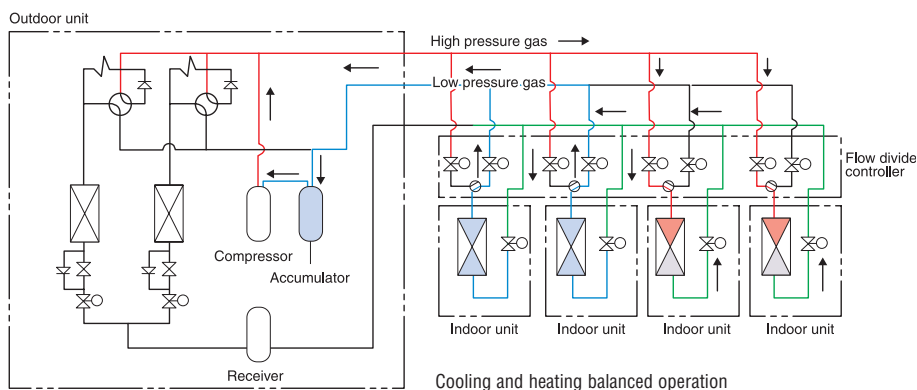


During defrosting or during automatic protection of a compressor, which is activated every several hours in heating operation, heating operation temporarily stops and restarts after some period. KXR6 series has the same automatic protection of compressor in cooling operation also. During this protection period air flow only comes on and cooling operation restarts after some period.

This model is not suitable for the usage of annual cooling operation such as for the server room, especially in the area where the outdoor air temperature becomes below 5°C. In case of mixed operation in cooling and heating mode below 5°C of outdoor air temperature, the cooling capacity may decrease in comparison with that for the operation only in cooling mode.


The industry's highest COP levels

We have cleared the class A standard, the highest energy saving level, with our high COP (Coefficient Of Performance).

EER in Cooling

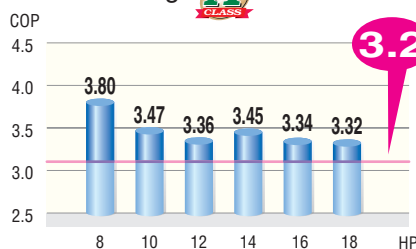

COP in Heating

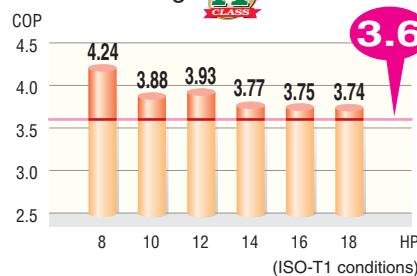

* COP = Capacity[kW] / Power Consumption[kW]

* COP across the KXR6 range ensures reduced running costs and reduced environmental impact.



KXR6 Outdoor units


Heat recovery 3-pipe systems 8, 10, 12, 14, 16hp (22.4kW – 45.0kW) for simultaneous heating and cooling

Model No.	Nominal Cooling Capacity
FDC224KXRE6	22.4kW
FDC280KXRE6	28.0kW
FDC335KXRE6	33.5kW
FDC400KXRE6	40.0kW
FDC450KXRE6	45.0kW

- The KXR6 heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 3.7 to 4.2.
- Connect from 50% up to 200% capacity indoor units.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 8hp-24 hp) allows continuous side-by-side installation

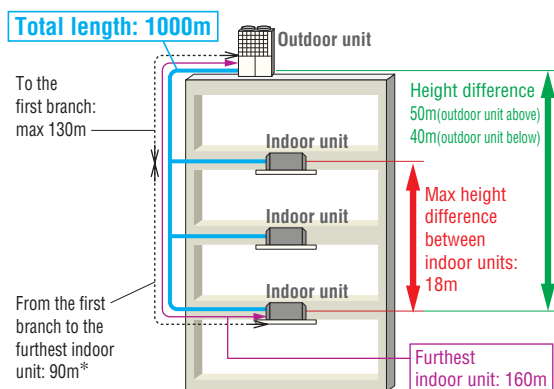

* The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

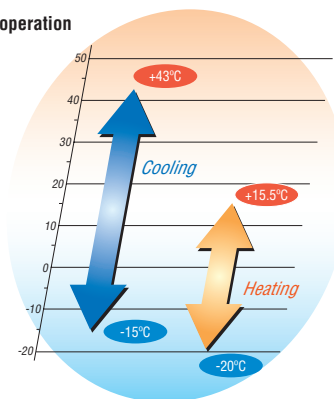


Specifications

Item			FDC224KXRE6	FDC280KXRE6	FDC335KXRE6	FDC400KXRE6	FDC450KXRE6	
Nominal horse power			8HP	10HP	12HP	14HP	16HP	
Power source			3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	
Electrical characteristics	Starting current		A					
			5					
	Power consumption	Cooling	kW	5.90	8.08	9.98	11.61	13.49
		Heating	kW	5.90	8.11	9.55	11.93	13.32
Operating current	Cooling	A	9.1-8.3	12.9-11.7	15.9-14.8	19.0-17.4	21.6-19.8	
	Heating	A	9.2-8.4	12.8-11.8	15.5-14.2	19.9-18.2	22.0-20.1	
Exterior dimensions		HxWxD	mm					
			1690x1350x720					
Net weight		kg	269					
Refrigerant charge		R410A	8.7	9.9	11.4	11.5		
Sound pressure level		Cooling/Heating	57/57	58/59	62/63	60/60	62.5/62.5	
Refrigerant piping size	Liquid line		ø9.52(3/8")					
	Suction Gas line		ø19.05(3/4")			ø12.7(1/2")		
	Discharge Gas line		ø25.4(1") [ø22.22(7/8")]			ø25.4(1") [ø28.58(1 1/8")]		
Capacity connection		%	ø15.88(5/8")			ø19.05(3/4")		
Number of connectable indoor units			20	25	30	36	40	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Dimensions

All measurements in mm.

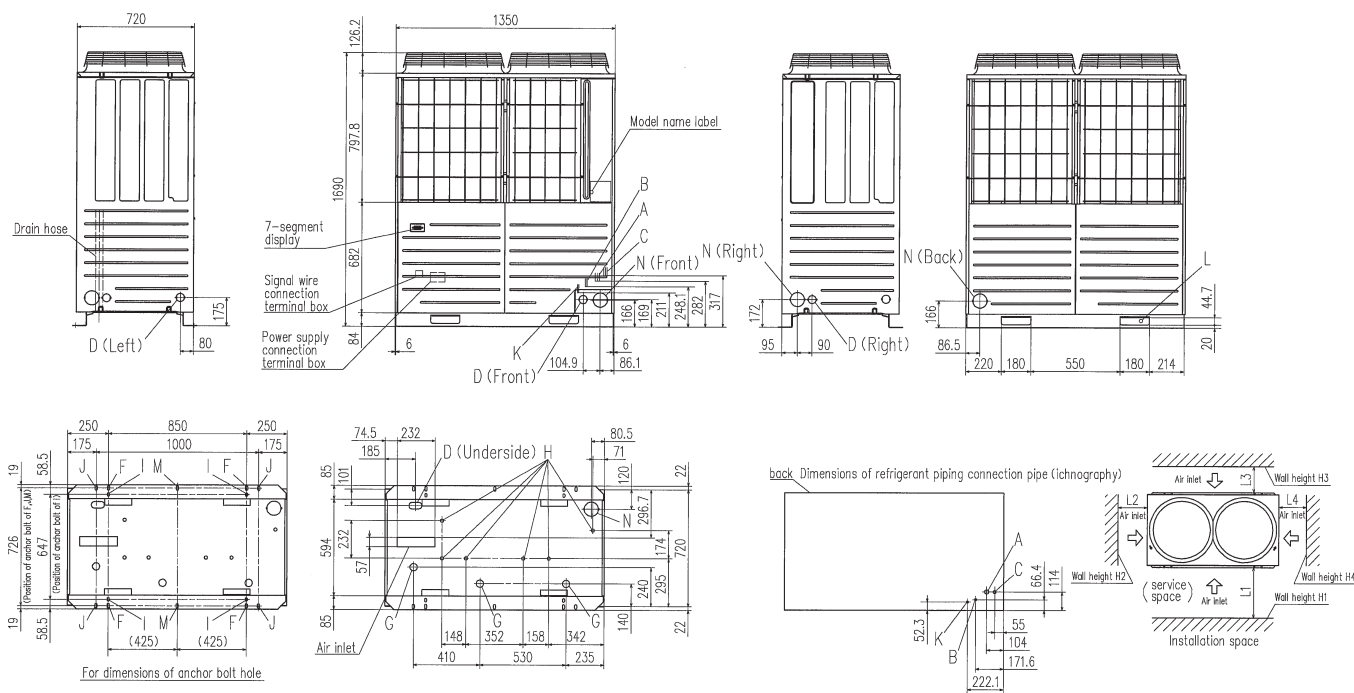

Mark	Content	224	280	335	335-K	400	450
A	Refrigerant suction gas piping connection entrance	ø19.05(Brazing)	ø22.22(Brazing)	ø25.4(Brazing)		ø28.58(Brazing)	
B	Refrigerant liquid piping connection entrance	ø9.52(Flare)		ø12.7(Flare)			
C	Refrigerant discharge gas piping connection entrance	ø15.88(Brazing)	ø19.05(Brazing)			ø22.22(Brazing)	
D	Power supply entry hole	ø50(right · left · front), long hole 40x80(under side)					
F	Anchor bolt hole	M10 x 4 places					
G	Drain waste water hose hole	ø45 x 3 places					
H	Drain hole	ø20 x 6 places					
K	Refrigerant oil equalization piping connection entrance	ø9.52(Flare)					
L	Carrying in or hole for hanging	180x44.7					
N	Refrigerant piping exit hole	ø88(or ø100)					

*14,16HP models only

Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit. (for 14,16HP only)
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit. (for 14,16HP only)

Installation example		
Dimensions	1	2
L1	500	Open
L2	10	10
L3	100	100
L4	10	Open
H1	1500	-
H2	No limited	No limited
H3	1000	No limited
H4	No limited	-



KXR6 Outdoor units


Heat recovery 3-pipe systems 18, 20, 22, 24hp (50.4kW – 68.0kW) for simultaneous heating and cooling

Model No.	Nominal Cooling Capacity
FDC504KXRE6	50.4kW
FDC560KXRE6	56.0kW
FDC615KXRE6	61.5kW
FDC680KXRE6	68.0kW

- The KXR6 heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 2.6 to 3.3.
- Connect from 50% up to 160% capacity indoor units.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 8hp~24hp) allows continuous side-by-side installation

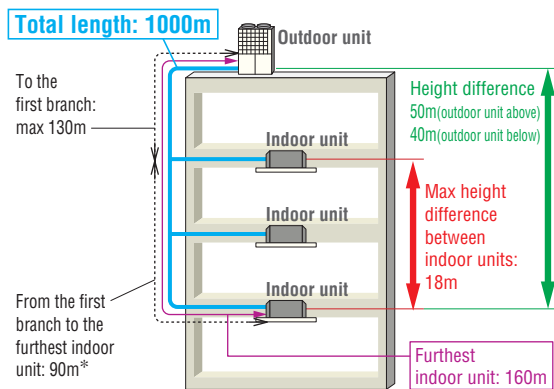

*The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

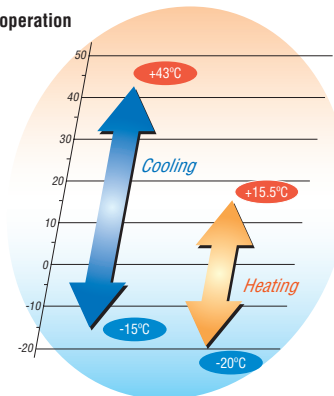


Specifications

Item			FDC504KXRE6	FDC560KXRE6	FDC615KXRE6	FDC680KXRE6
Nominal horse power			18HP	20HP	22HP	24HP
Power source			3 Phase 380-415V, 50Hz			
Nominal capacity	Cooling	kW	50.4	56.0	61.5	68.0
	Heating		56.5	63.0	69.0	73.0
Electrical characteristics	Starting current	A	8			
	Power consumption	Cooling	15.18	17.95	21.47	25.99
		Heating	15.12	16.79	19.11	19.69
	Operating current	Cooling	23.8-21.8	28.4-26.0	34.7-31.8	44.9-41.1
Heating		25.2-23.1	28.0-25.7	31.6-28.9	34.0-31.1	
Exterior dimensions	HxWxD	mm	2048x1350x720			
Net weight		kg	380		399	
Refrigerant charge	R410A	kg	11.5			
Sound pressure level	Cooling/Heating	dB(A)	62/62	63.5/63.5	64/64.5	65.5/65.5
	Liquid line		ø12.7(1/2")			
	Suction Gas line	in (mm)	ø28.58(1 1/8")			
Refrigerant piping size	Discharge Gas line		ø22.22(7/8")		ø25.4(1") [ø22.22(7/8")]	
	Capacity connection	%	50~160			
Number of connectable indoor units			36	40	44	49

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Dimensions

All measurements in mm.

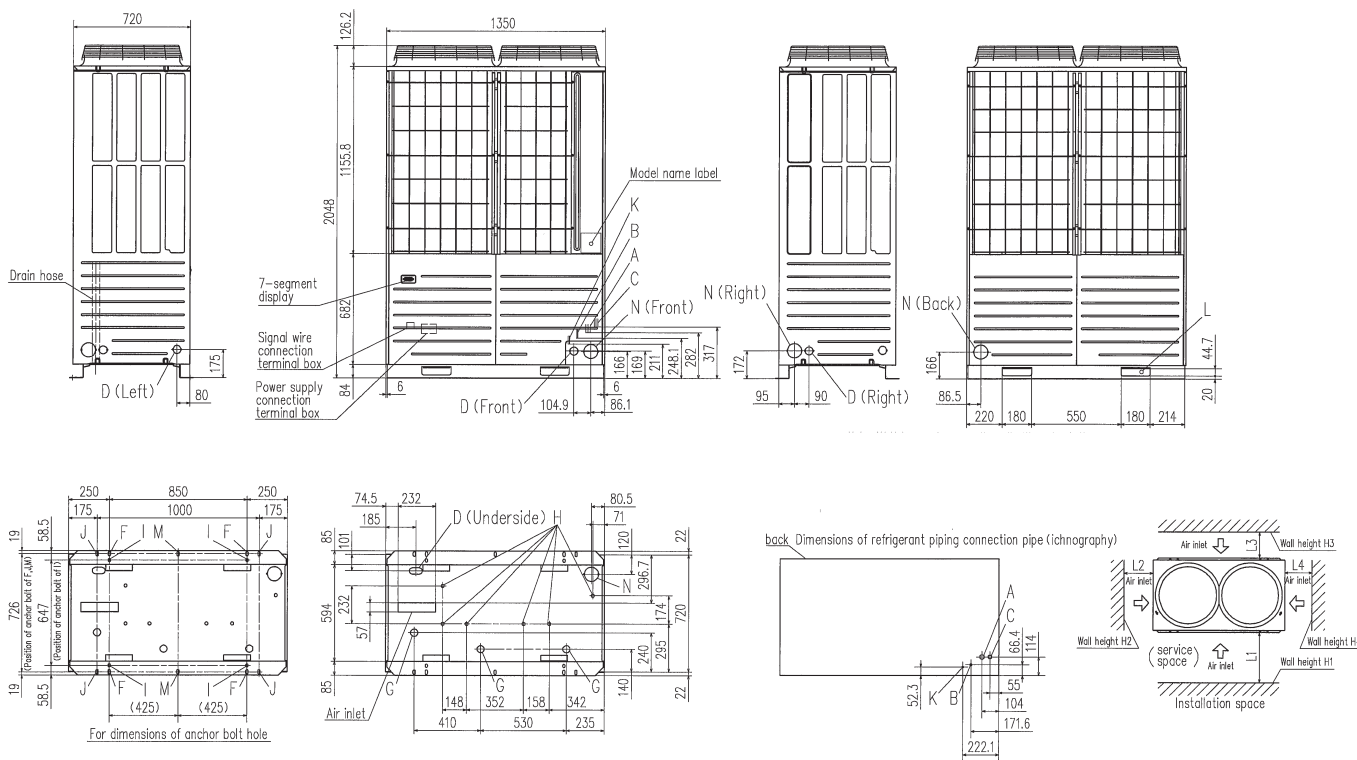

Mark	Content	504	560	560-K	615	680
A	Refrigerant suction gas piping connection entrance	ø28.58(Brazing)				
B	Refrigerant liquid piping connection entrance	ø12.7(Flare)				
C	Refrigerant discharge gas piping connection entrance	ø22.22(Brazing)		ø25.4(Brazing)		
D	Power supply entry hole	ø50(right · left · front),long hole 40x80(under side)				
F	Anchor bolt hole	M10 x 4 places				
G	Drain waste water hose hole	ø45 x 3 places				
H	Drain hole	ø20 x 6 places				
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)				
L	Carrying in or hole for hanging	180x44.7				
N	Refrigerant piping exit hole	ø88(or ø100)				

Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	10
L ₃	100	100
L ₄	10	Open
H ₁	1500	-
H ₂	No limited	No limited
H ₃	1000	No limited
H ₄	No limited	-

Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit.
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit.



KXR6 Outdoor units


Heat recovery 3-pipe combination systems 26, 28, 30, 32hp (73.5kW – 90.0kW) for simultaneous heating and cooling

Model No.	Nominal Cooling Capacity
FDC735KXRE6 (FDC335-K+FDC400)	73.5kW
FDC800KXRE6 (FDC400x2)	80.0kW
FDC850KXRE6 (FDC400+FDC450)	85.0kW
FDC900KXRE6 (FDC450x2)	90.0kW

- The KXR6 heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 3.3 to 3.5.
- Connect from 50% up to 160% capacity indoor units.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 8hp-24hp) allows continuous side-by-side installation

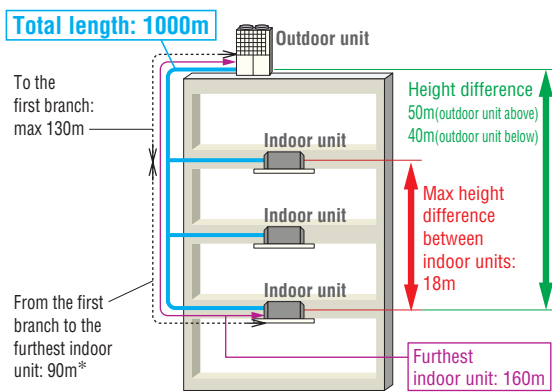

*The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

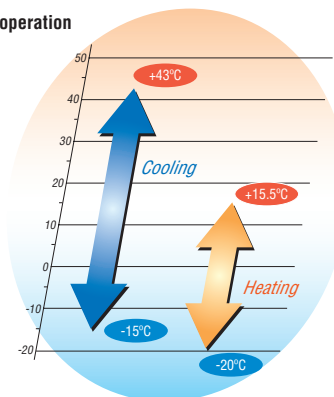


Specifications

Item		FDC735KXRE6	FDC800KXRE6	FDC850KXRE6	FDC900KXRE6		
Combination (FDC)		335KXRE6-K	400KXRE6	400KXRE6	450KXRE6		
		400KXRE6	400KXRE6	450KXRE6	450KXRE6		
Nominal horse power		26HP	28HP	30HP	32HP		
Power source		3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	kW	73.5	80.0	85.0	90.0	
	Heating	kW	82.5	90.0	95.0	100.0	
Electrical characteristics	Starting current	A	16				
	Power consumption	Cooling	kW	21.08	23.22	25.10	26.98
		Heating	kW	21.3	23.86	25.25	26.64
	Operating current	Cooling	A	34.4-31.5	38.0-34.8	40.6-37.2	43.2-39.6
Heating		A	35.4-32.4	39.8-36.4	41.9-38.3	44.0-40.2	
Exterior dimensions	HxWxD	mm	1690x2700x720				
Net weight		kg	358x2				
Refrigerant charge	R410A	kg	33				
Refrigerant piping size	Liquid line		ø15.88(5/8")				
	Suction Gas line	in (mm)	ø31.75(1 1/4") [ø34.92(1 3/8")]				
	Discharge Gas line		ø25.4(1") [ø28.58(1 1/8")]		ø28.58(1 1/8")		
Capacity connection	%	50-160					
Number of connectable indoor units		53	58	61	65		

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Dimensions

All measurements in mm.

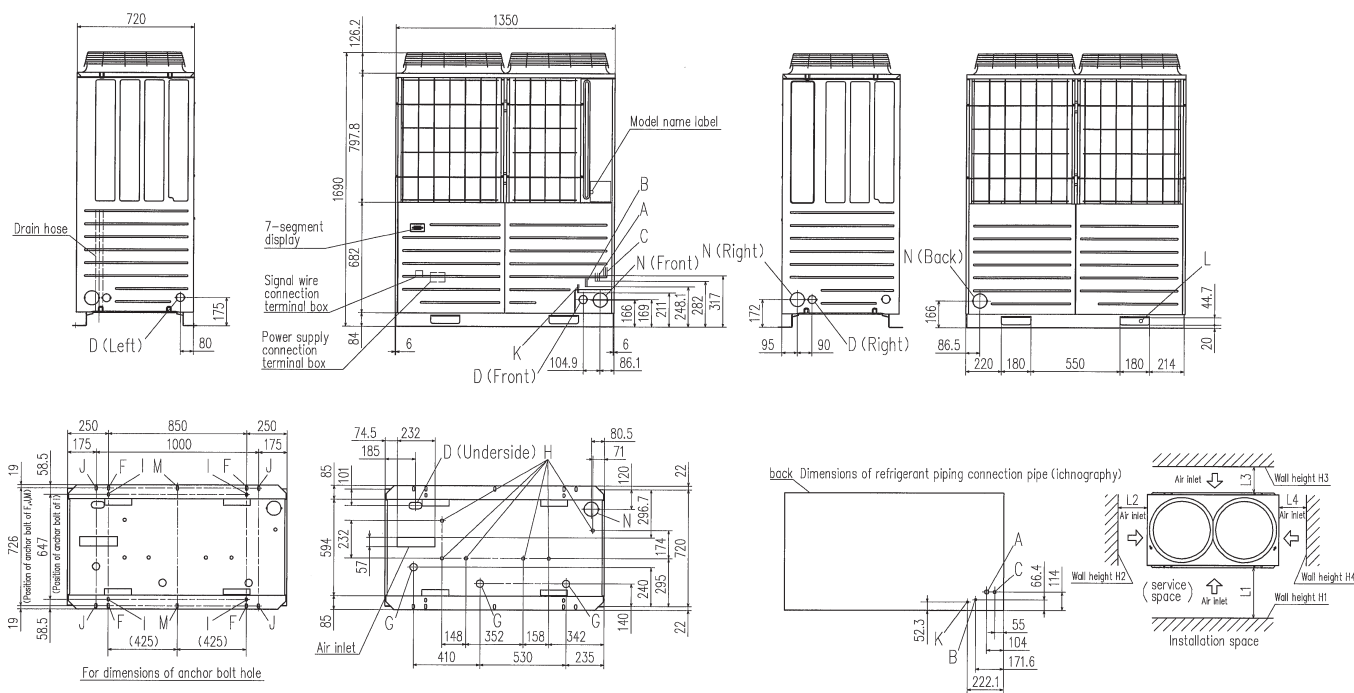

Mark	Content	335-K	400	450
A	Refrigerant suction gas piping connection entrance	ø25.4(Brazing)		ø28.58(Brazing)
B	Refrigerant liquid piping connection entrance	ø12.7(Flare)		
C	Refrigerant discharge gas piping connection entrance	ø19.05(Brazing)	ø22.22(Brazing)	
D	Power supply entry hole	ø50(right · left · front), long hole 40x80(under side)		
F	Anchor bolt hole	M10 x 4 places		
G	Drain waste water hose hole	ø45 x 3 places		
H	Drain hole	ø20 x 6 places		
K*	Refrigerant oil equalization piping connection entrance	ø9.52(Flare)		
L	Carrying in or hole for hanging	180x44.7		
N	Refrigerant piping exit hole	ø88(or ø100)		

*14,16HP models only

Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit. (for 14,16HP only)
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit. (for 14,16HP only)

Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	10
L ₃	100	100
L ₄	10	Open
H ₁	1500	-
H ₂	No limited	No limited
H ₃	1000	No limited
H ₄	No limited	-



KXR6 Outdoor units

Heat recovery 3-pipe combination systems

34, 36, 38, 40, 42, 44, 46, 48hp (96.0kW – 136.0kW)


for simultaneous *heating* and *cooling*



Model No.	Nominal Cooling Capacity
FDC960KXRE6 (FDC450+FDC504)	96.0kW
FDC1010KXRE6 (FDC504x2)	101.0kW
FDC1065KXRE6 (FDC504+FDC560)	106.5kW
FDC1130KXRE6 (FDC560x2)	113.0kW
FDC1180KXRE6 (FDC560-K+FDC615)	118.0kW
FDC1235KXRE6 (FDC615x2)	123.5kW
FDC1300KXRE6 (FDC615+FDC680)	130.0kW
FDC1360KXRE6 (FDC680x2)	136.0kW




- The KXR6 heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 3.3 to 3.8.
- Connect from 50% up to 130% capacity indoor units (960KXRE6:160%).
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

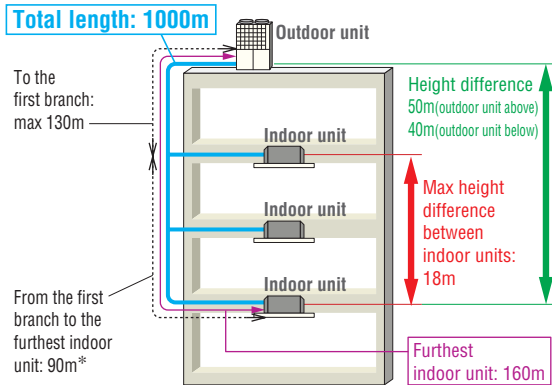

* The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

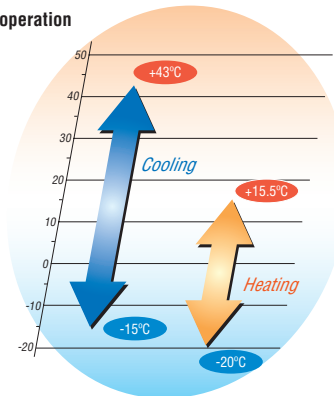


Specifications

Item		FDC960KXRE6	FDC1010KXRE6	FDC1065KXRE6	FDC1130KXRE6	FDC1180KXRE6	FDC1235KXRE6	FDC1300KXRE6	FDC1360KXRE6	
Combination (FDC)		450KXRE6	504KXRE6	504KXRE6	560KXRE6	560KXRE6-K	615KXRE6	615KXRE6	680KXRE6	
		504KXRE6	504KXRE6	560KXRE6	560KXRE6	615KXRE6	615KXRE6	680KXRE6	680KXRE6	
Nominal horse power		34HP	36HP	38HP	40HP	42HP	44HP	46HP	48HP	
Power source		3 Phase 380-415V, 50Hz								
Nominal capacity	Cooling	96.0	101.0	106.5	113.0	118.0	123.5	130.0	136.0	
	Heating	108.0	113.0	119.5	127.0	132.0	138.0	142.0	146.0	
Electrical characteristics	Starting current	A 16								
	Power consumption	Cooling	28.67	30.36	33.13	35.9	39.42	42.94	47.46	51.98
		Heating	28.44	30.24	31.91	33.58	35.9	38.22	38.80	39.38
	Operating current	Cooling	45.4-41.6	47.6-43.6	52.2-47.8	56.8-52.0	63.1-57.8	69.4-63.6	79.6-72.9	89.8-82.2
Heating		47.2-43.2	50.4-46.2	53.2-48.8	56.0-51.4	59.6-54.6	63.2-57.8	65.6-60.0	68.0-62.2	
Exterior dimensions	HxWxD	mm 2048x2700x720								
Net weight	kg	358+380		380x2			399x2			
Refrigerant charge	R410A	kg 33								
Refrigerant piping size	Liquid line	ø15.88(5/8")			ø19.05(3/4")					
	Suction Gas line	ø31.75(1 1/4") [ø34.92(1 3/8")]			ø38.1(1 1/2") [ø34.92(1 3/8")]					
	Discharge Gas line	ø28.58(1 1/8")								
Capacity connection	%	50-160			50-130					
Number of connectable indoor units		69	59	62	66	69	72	76	80	

1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.

Dimensions

All measurements in mm.

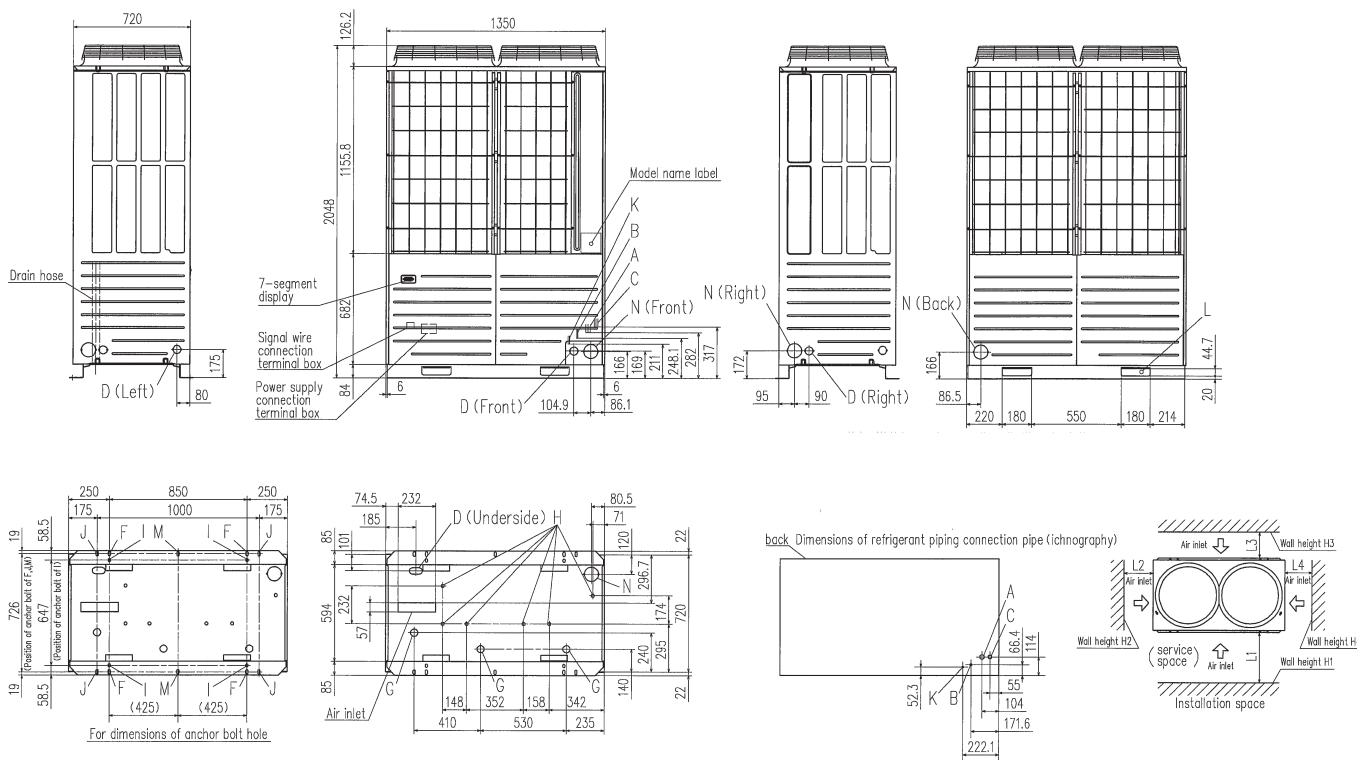

Mark	Content	504	560	560-K	615	680
A	Refrigerant suction gas piping connection entrance	ø28.58(Brazing)				
B	Refrigerant liquid piping connection entrance	ø12.7(Flare)				
C	Refrigerant discharge gas piping connection entrance	ø22.22(Brazing)	ø25.4(Brazing)			
D	Power supply entry hole	ø50(right · left · front),long hole 40x80(under side)				
F	Anchor bolt hole	M10 x 4 places				
G	Drain waste water hose hole	ø45 x 3 places				
H	Drain hole	ø20 x 6 places				
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)				
L	Carrying in or hole for hanging	180x44.7				
N	Refrigerant piping exit hole	ø88(or ø100)				

Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	10
L ₃	100	100
L ₄	10	Open
H ₁	1500	-
H ₂	No limited	No limited
H ₃	1000	No limited
H ₄	No limited	-

Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit.
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit.



KXR6 PFD refrigerant flow branch control

Branch control

- PFD1123-E
- PFD1803-E
- PFD2803-E
- PFD1123X4-E

Total downstream indoor unit capacity

- less than 11.2kW
- less than 18.0kW
- 28.0kW or less
- less than 44.8kW(less than 11.2kWx4 branches)



Relay kit
(Relay kit comes attached to the branch control)

- The remote control setting (as individual indoor unit on-off, temperature setting other than cooling/heating mode control) is possible with one remote control connected to each indoor unit, while at the same time, Center Control (SC-SL1N/2NA/3NA-E) can be used together with the individual remote control.
- It is necessary to set the central control to use this function. Please refer to the Installation Manual for details.

- In case of the mode changeover from cooling to heating and from cooling to heating, by the use of only the indoor units and PFD box combination, the mode changeover sound was reduced. All this made possible without turning off the compressor and at the same time without the reduction of capacity.


- The risk of refrigerant leakage was reduced by changing piping connection at the PFD box to brazing method.

- By the use of optional PFD box extension cable that has a connector at ends, makes it possible to further separate the indoor unit and PFD box. This will enable the PFD box to be located away from the indoor unit and help reduce the influence of sound caused by PFD box and refrigerant flow.

extension cable 15m




PFD-15WR-E (option)

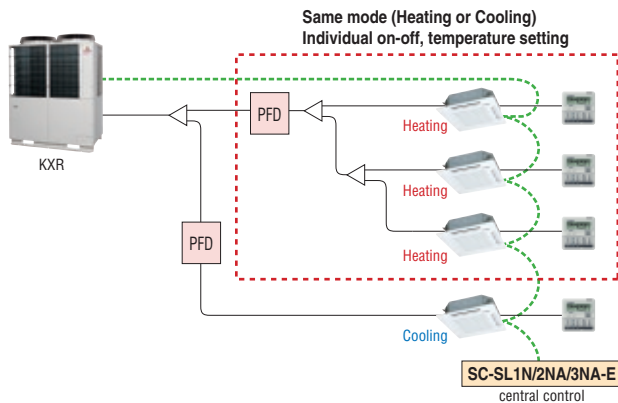


Easy installation

New PFD design means the connection of the indoor unit liquid pipe is made directly to the liquid line - bypassing the PFD. This means (x2) less pipe connections per indoor unit, reducing installation time and cost.



The PFD is connected to the indoor unit by 3 core signal wire via a relay kit (supplied) to be located within 2m of each other. The indoor unit however can be up to 40m away. Power to the PFD can be connected from the indoor unit or other supply.

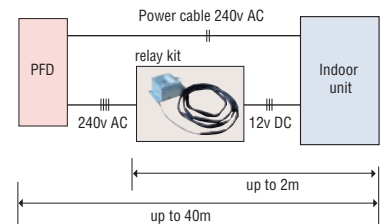

Groups of indoor units can be connected up to a total capacity 44.8kW to a single PFD with branch piping and all units in that group will operate in the same mode only (cooling or heating).


We also have introduced the 4-way PFD control PFD1123X4-E which can connect up to four indoor units with individual control - simultaneous cooling or heating.



4-Way PFD box

Branch control	Total downstream capacity	*Connectable indoor units
PFD1123-E	less than 11.2kW	1-5
PFD1803-E	less than 18.0kW	1-8
PFD2803-E	28.0kW or less	1-10
PFD1123X4-E	less than 44.8kW(less than 11.2kWx4 branches)	Up to 20


*Refer to Data Book for details

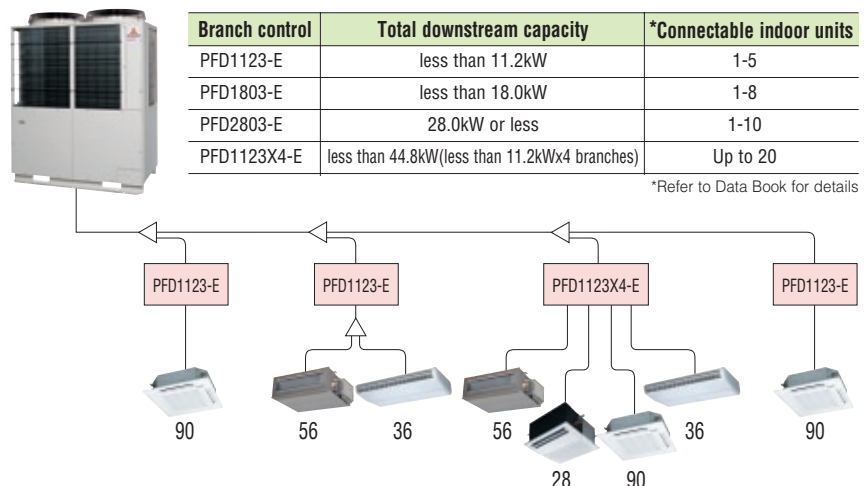


Dimensions

All measurements in mm.


PFD1123-E

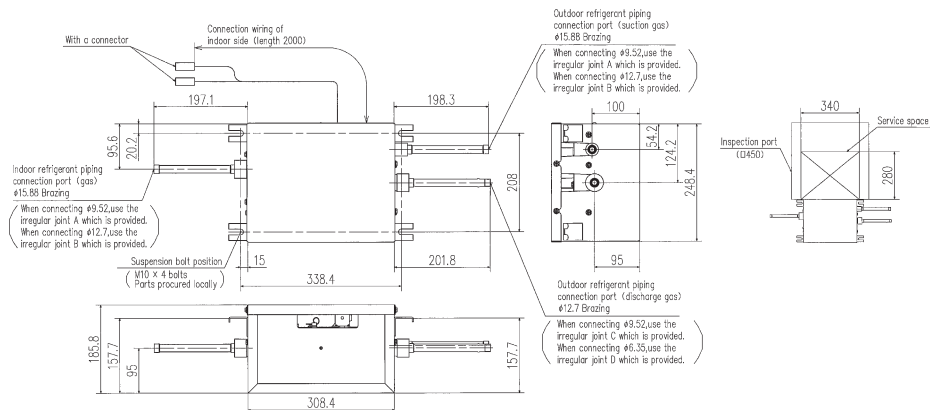


PFD1803-E

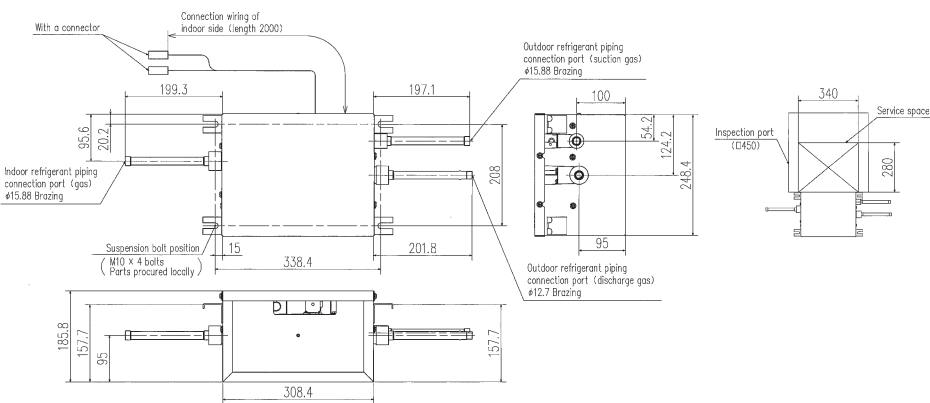

PFD2803-E

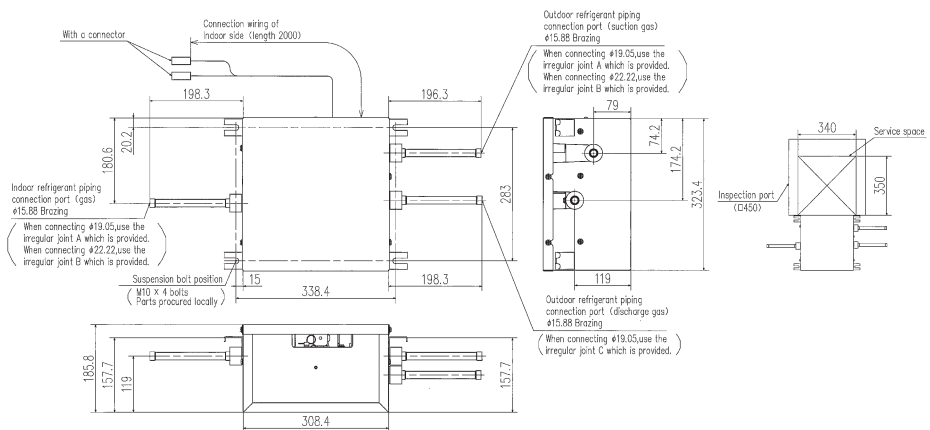

PFD1123X4-E

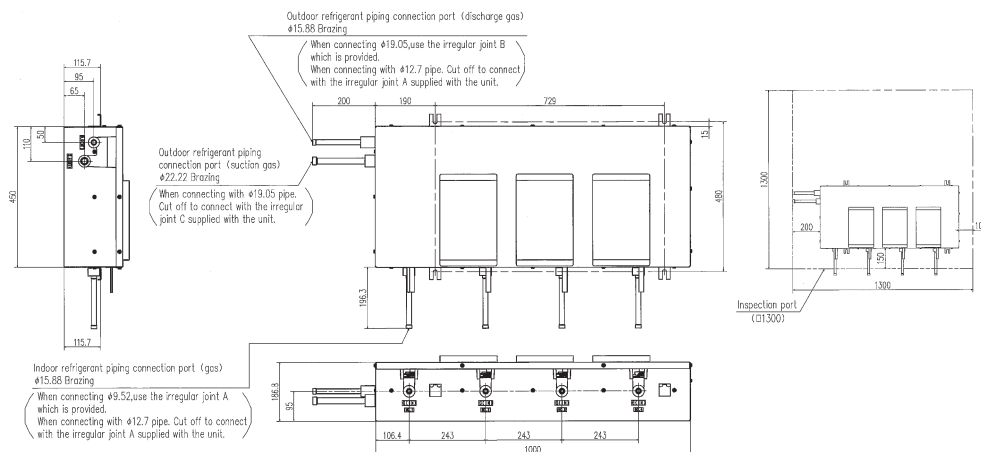



KXR6 refrigerant piping

Installation of Interconnecting Pipework

Mitsubishi KXR6 equipment is manufactured to the highest standards of quality and reliability. It is imperative the method of installation and the materials used are also to high standards, to ensure trouble free operation and long term reliability.

The interconnecting pipework must be installed by a competent and trained engineer. Refrigeration quality copper tube must be used, soft copper coils or half-hard straight lengths. The refrigeration quality tube must be soft drawn seamless high grade copper pipe. The copper tube must be selected taking into account the higher operating pressures of R410A refrigerant, and that high pressures will occur throughout the system because of the reverse cycle operation. All pipework material used should be EN12735 European standard.

The supplied branch pipe kits, must be used to make connections to indoor units, and the supplied manifold kits must be used to make connections between outdoor units (where applicable); it is not permitted to use standard fittings such as elbows, tees etc. The branch pipes shall be installed in accordance with the manufacturer's instructions, allowing unrestricted flow of refrigerant, and in accordance with European standard E378:2000. All brazed joints shall be made with dry nitrogen purge to ensure the prevention of oxidation to the internal surface of the copper pipes.



The ingress of moisture, dirt and any other contaminants to the interior of the copper pipes, and air conditioning units, must be prevented during the installation procedure. After the installation of pipework, prior to the

connection of the outdoor units, and sealing of insulation joints, the pipework must be pressure tested for leakage, using dry nitrogen.

Additional Refrigerant

Additional R410A refrigerant only shall be used, and must be charged by weight only, using electronic scales. The amount of additional refrigerant must be accurately calculated from the manufacturer's data, based on the length and diameter of each section of the liquid refrigerant pipework of the system.

Single outdoor unit piping examples:

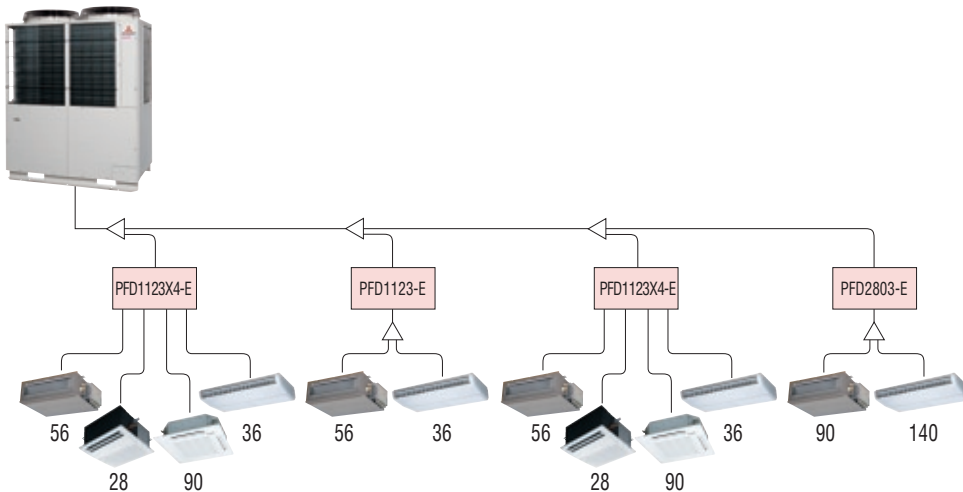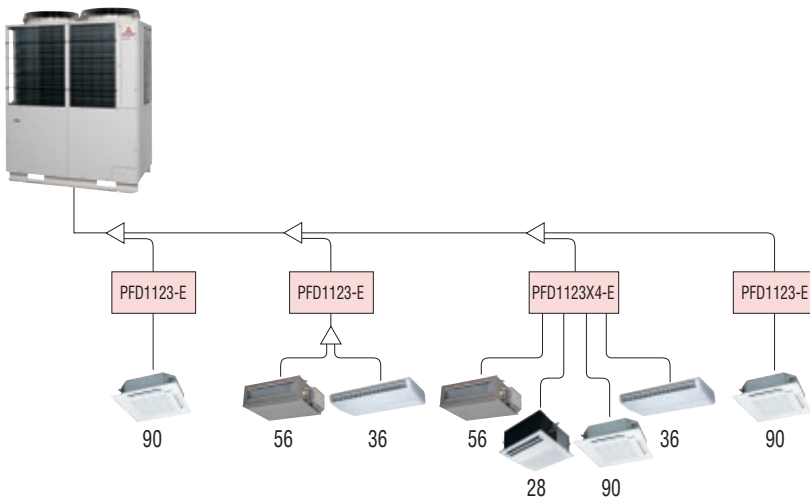

Liquid pipe
Suction gas pipe
Discharge gas pipe

KXR6 refrigerant piping

Pipe sizes applicable to European installations.

Outdoor unit (HP)	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48
Liquid pipe	ø9.52		ø12.7						ø15.88						ø19.05						
Suction Gas pipe	ø19.05		ø22.22		ø28.58						ø34.92										
Discharge Gas Pipe	ø15.88		ø19.05		ø22.22						ø28.58										
Liquid pipe	ø12.7				ø15.88				ø19.05				ø22.22								
Suction Gas pipe	ø22.22				ø28.58				ø34.92												
Discharge Gas Pipe	ø15.88		ø19.05		ø22.22						ø28.58										




mm	inch	mm	inch
ø9.52	3/8"	ø28.58	1 1/8"
ø12.7	1/2"	ø31.8	1 1/4"
ø15.88	5/8"	ø34.92	1 3/8"
ø19.05	3/4"	ø38.1	1 1/2"
ø22.22	7/8"	ø44.5	1 3/4"
ø25.4	1"	ø50.8	2"



DIS-22-1-RG/DIS-180-1-RG



DOS-2A-1-RG

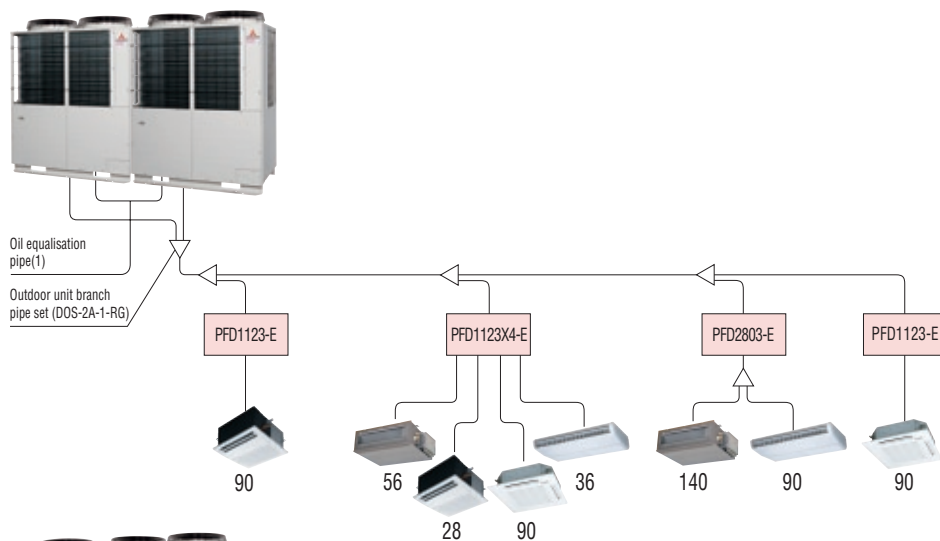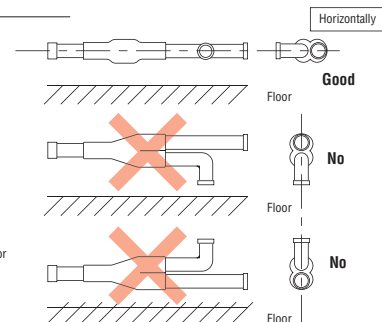

Outdoor unit's branching piping


Outdoor unit	Branch piping set
2 units (for 735~1360)	DOS-2A-1-RG

Indoor unit's first branching piping

Total capacity of indoor units	Branch piping set
~179	DIS-22-1-RG
180~370	DIS-180-1-RG
371~539	DIS-371-2-RG
540~	DIS-540-2-RG

For Down Stream of PFD box

Total capacity of indoor units	Branch piping set
~179	DIS-22-1G
180~370	DIS-180-1G
371~539	DIS-371-1G

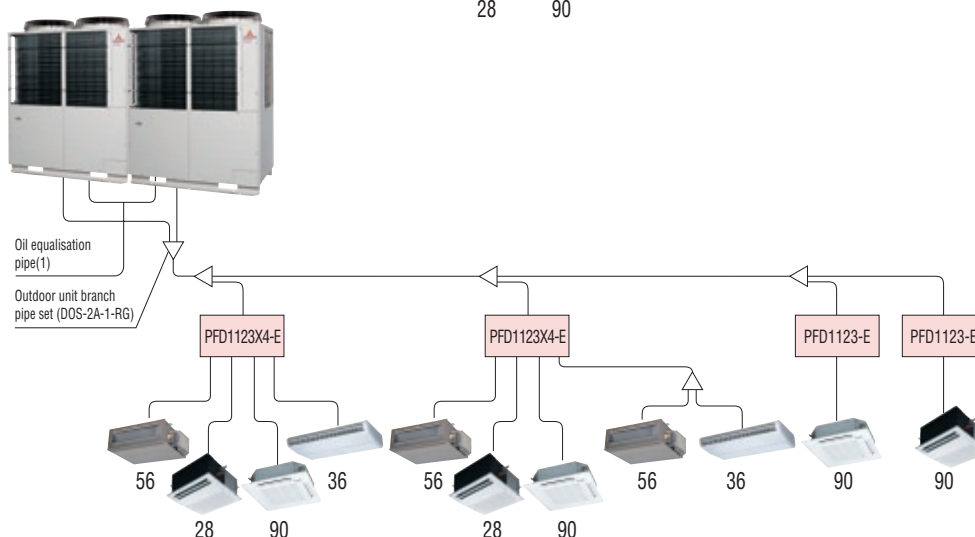



KXR6 electrical wiring – power supply


KXR6 new design includes greatly simplified wiring requirements utilising a ‘polarity-free’ two wire control loop connecting the indoor units.

Power wiring

Cables can be laid through the front, right, left or bottom of the outdoor unit casing.

Separate power supplies should be used for the outdoor unit (3/phase) and the indoor units (1/phase).


Only control wiring is connected from outdoor to indoor unit.

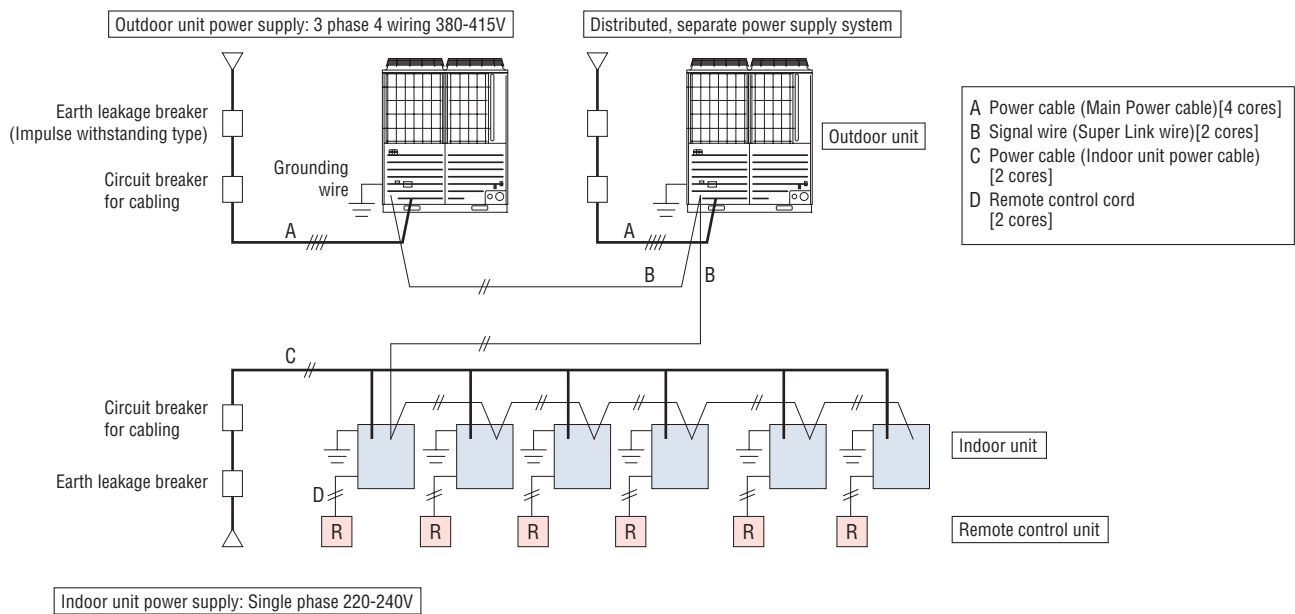

CAUTION

If the earth leakage breaker is exclusively for ground fault protection, then you will need to install a circuit breaker for wiring work.

KXR6 outdoor unit mechanical compartment

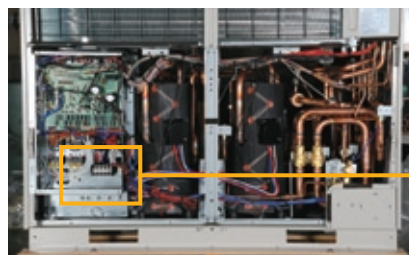

Electrical component box



Outdoor unit power supply terminal block

KXR6 electrical wiring – control wiring

1. The control wiring is 5 Volt DC, non-polarised, two wire connection notated as 'A1' and 'B1'. This 'AB' wiring connects outdoor unit to indoor unit and indoor unit to indoor unit.

2. This wiring must be a 2-core shielded cable size 0.75mm² or 1.25mm².


	0.75mm ²	1.25mm ²
~1000m	YES	YES
1000~1500m	YES	NO

3. We recommend the both ends of the shield of the cable are connected to ground (earth) at all the indoor units and outdoor units.


4. When plural outdoor units are used,
 •Connect the signal cable between indoor and outdoor units and the signal cable between outdoor units belonging to the same refrigerant line to A1 and B1.
 •Connect the signal line between outdoor units on different refrigerant lines to A2 and B2.

5. For current specification of 2-core (AB) wiring, please consult your MHI dealer.


(1) When one outdoor unit is used

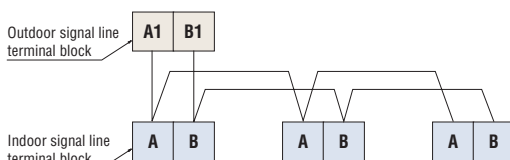

o Indoor and outdoor signal line do not have a polarity. Any of the connections in the following illustration can be made.




(2) When plural outdoor units are used

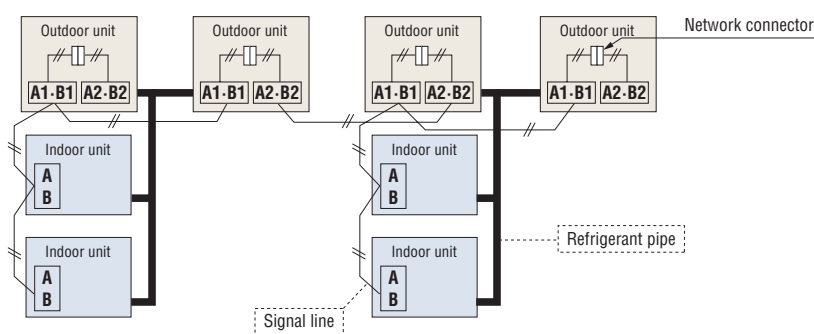


- (a) The maximum number of indoor units that can be connected in a system is 128 and it is possible to configure outdoor units and/or indoor units as an outdoor or indoor unit group connected with each other with two wires.
- (b) The signal wires can also be connected using the method shown below.

(3) The signal lines can also be connected using the method shown below.

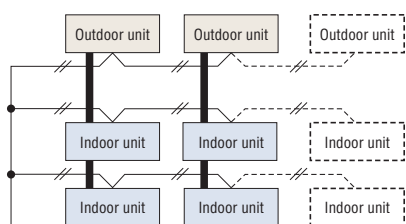


Important o Loop wiring prohibited

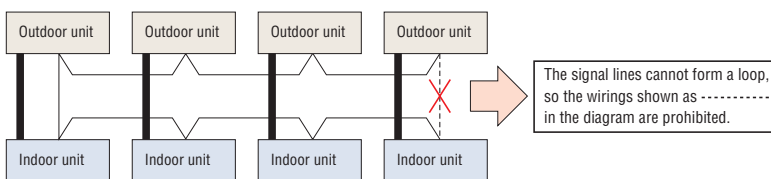

Remote control wiring specifications

For interconnecting wiring between the remote control and indoor units (XY wiring) use 2-core cable size 0.3mm². The maximum length of 2-core cable is 600 metres. Where the 2-core wiring exceeds 100m, use the wire size detailed on the table opposite.

Length (m)	Wire size
100 to 200	0.5mm ² x 2 core
To 300	0.75mm ² x 2 core
To 400	1.25mm ² x 2 core
To 600	2.0mm ² x 2 core

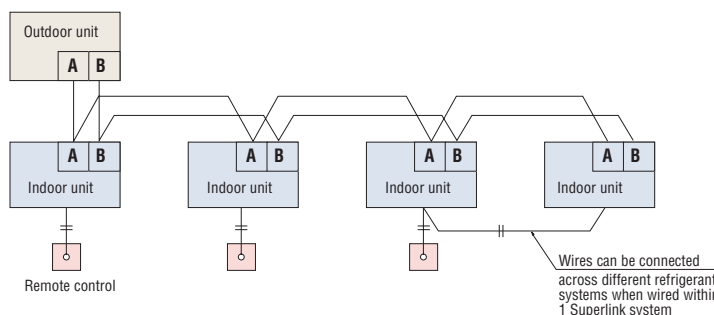



Indoor units Ceiling Cassette -4way- FDT

Model No.

- FDT28KXE6F FDT90KXE6F
- FDT36KXE6F FDT112KXE6F
- FDT45KXE6F FDT140KXE6F
- FDT56KXE6F FDT160KXE6F
- FDT71KXE6F



Remote control (option)

Wired



Wireless




Individual flap control system

According to room temperature conditions, four directions of air flow can be controlled by individual flap as preferred. As individual flap control is available even after installation, installation area became wider than before.




Due to optimization of outlet design of air flow with our new advanced technology, sufficient air flow is secured and long reach of air flow is realized.



The thinnest design



Thanks to new design of heat exchanger changed from 2 parts to 1 part, the height of indoor unit is reduced drastically. Furthermore applying DC fan motors to FDT models, the highest energy efficiency level, reduction of weight and significant compact design are realized.



Flap control system

Selection of flap position is possible. Individual flaps can be set at different angles.

*RCH-E3 is not applicable to the Individual flap control system and the Flap control system.

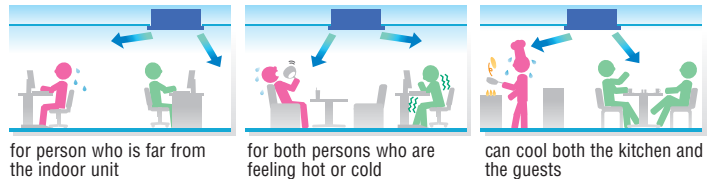

Specifications

Item	Model	FDT28KXE6F	FDT36KXE6F	FDT45KXE6F	FDT56KXE6F	FDT71KXE6F	FDT90KXE6F	FDT112KXE6F	FDT140KXE6F	FDT160KXE6F	
Nominal cooling capacity	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0	
Nominal heating capacity	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	18.0	
Power source		1 Phase 220-240V, 50Hz									
Power consumption	Cooling	0.03-0.03			0.04-0.04	0.08-0.08	0.15-0.15				
	Heating	0.03-0.03			0.04-0.04	0.08-0.08	0.15-0.15				
Sound pressure level ※	dB(A)	Hi:33 Me:31 Lo:30					Hi:40 Me:37 Lo:35		Hi:42 Me:40 Lo:37 Hi:43 Me:41 Lo:38		
Exterior dimensions H x W x D	mm	Unit:246x840x840 Panel:35x950x950					Unit:298x840x840 Panel:35x950x950				
Net weight	kg	Unit:22 Panel:5.5			Unit:24 Panel:5.5		Unit:27 Panel:5.5				
Air flow ※	CMM	Hi:18 Me:16 Lo:14					Hi:27 Me:24 Lo:20		Hi:30 Me:27 Lo:23		
Outside air intake		Possible									
Panel		T-PSA-3BW-E									
Air filter, Q'ty		Pocket Plastic net x1 (Washable)									
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-T-36W-E									
Installation data	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")				


1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDT28/36/45 37dB(A), FDT56 39dB(A), FDT71 46dB(A), FDT90/112/140/160 51dB(A). Air flow: FDT28/36/45/56 20CMM, FDT71 28CMM, FDT90/112/140/160 37CMM.


Dimensions

All measurements in mm.

FDT28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F, 71KXE6F

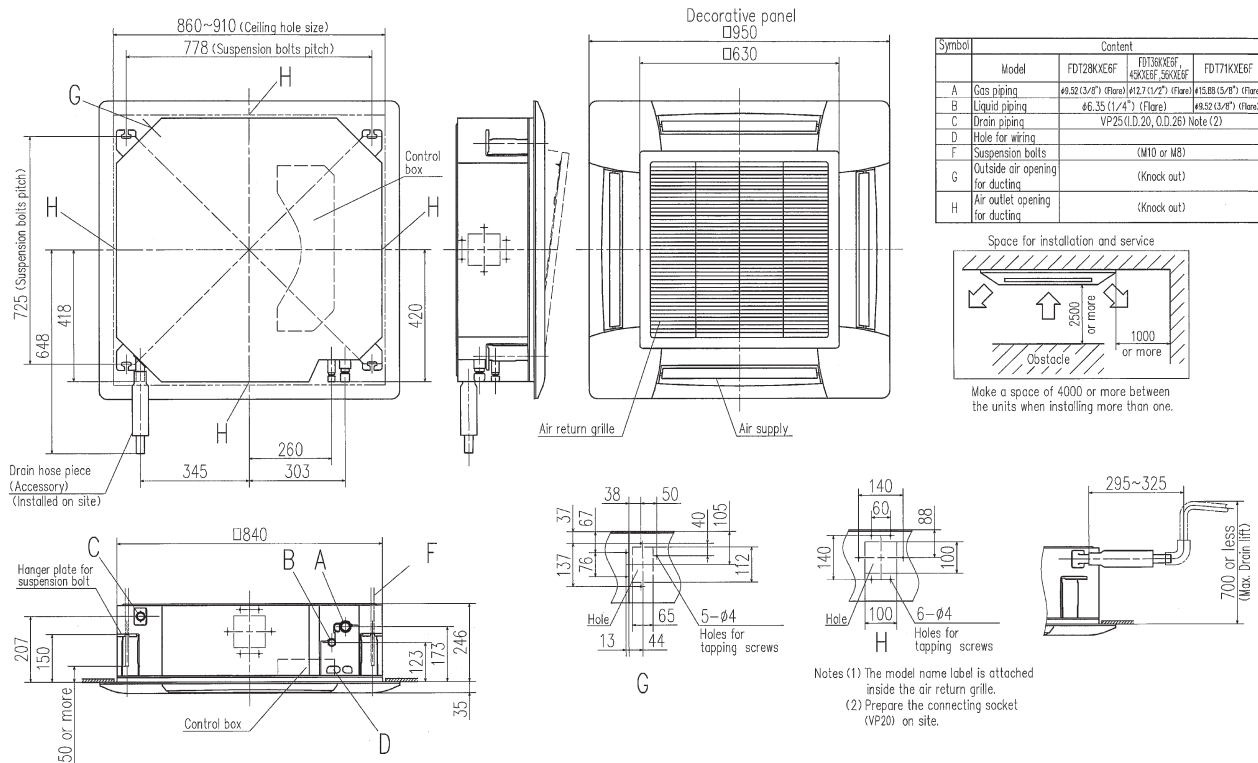

FDT90KXE6F, 112KXE6F, 140KXE6F, 160KXE6F

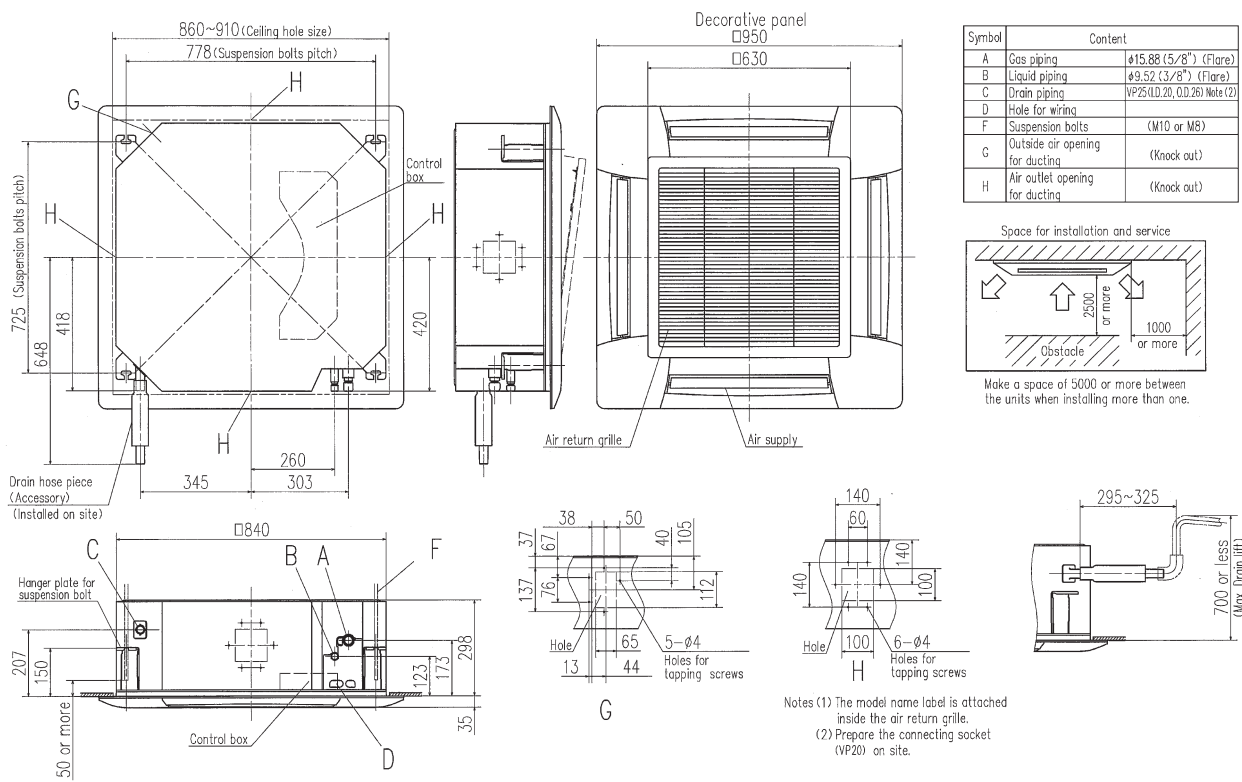



Ceiling Cassette -4way Compact (600x600mm)- FDTC

Model No.

- FDTC22KXE6F
- FDTC28KXE6F
- FDTC36KXE6F
- FDTC45KXE6F
- FDTC56KXE6F

Fits into standard
600 x 600 ceiling



Remote control (option)

Wired



Wireless




RC-EX1A RC-E5 RCH-E3 RCN-TC-24W-ER

Taking OA (Outside Air) into inside

OA Spacer TC-OAS-E (option)
Joint Duct TC-OAD-E (option)

Utilizing OA spacer which comes as optional equipment, outside air can be taken into inside.

Using 1 joint duct:
OA comes up to 1.3m³/min.
Using 2 joint ducts:
OA comes from 1.3 to 2.6m³/min.

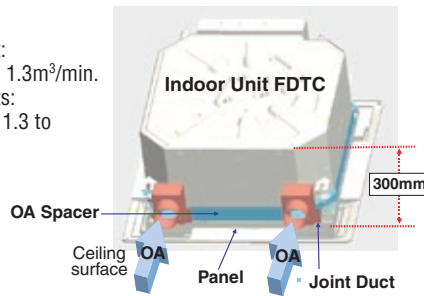


Individual flap control system

According to room temperature conditions, four directions of air flow can be controlled by individual flap as preferred. As individual flap control is available even after installation, installation area became wider than before.




Quiet operation (Sound level in the Lo mode.)

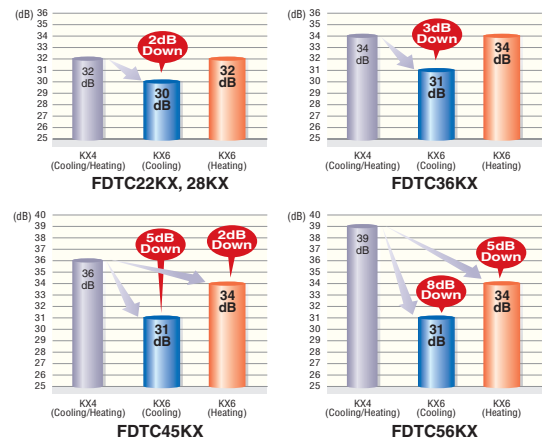

Flap control system

Selection of flap position is possible. Individual flaps can be set at different angles.

* RCH-E3 is not applicable to the Individual flap control system and the Flap control system.



Specifications




Item	Model	FDTC22KXE6F	FDTC28KXE6F	FDTC36KXE6F	FDTC45KXE6F	FDTC56KXE6F
Nominal cooling capacity	kW	2.2	2.8	3.6	4.5	5.6
Nominal heating capacity	kW	2.5	3.2	4.0	5.0	6.3
Power source		1 Phase 220-240V, 50Hz				
Power consumption	Cooling	0.03-0.03			0.05-0.05	
	Heating	0.03-0.03			0.05-0.05	
Sound pressure level ※	Cooling	Hi:35 Me:33 Lo:30		Hi:38 Me:36 Lo:31	Hi:40 Me:37 Lo:31	Hi:45 Me:39 Lo:31
	Heating	Hi:35 Me:33 Lo:32		Hi:38 Me:36 Lo:34	Hi:40 Me:37 Lo:34	Hi:45 Me:39 Lo:34
Exterior dimensions H x W x D	mm	Unit:248x570x570 Panel:35x700x700				
Net weight	kg	Unit:14 Panel:3.5			Unit:15 Panel:3.5	
Air flow ※	Cooling	Hi:9.5 Me:8.5 Lo:7		Hi:10 Me:9 Lo:7	Hi:11 Me:9 Lo:7	Hi:13 Me:10 Lo:7
	Heating	Hi:9.5 Me:8.5 Lo:8		Hi:10 Me:9 Lo:8	Hi:11 Me:9 Lo:8	Hi:13 Me:10 Lo:8
Outside air intake		Not possible				
Panel		TC-PSA-25W-E				
Air filter, Q'ty		Pocket Plastic net x1 (Washable)				
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-TC-24W-ER				
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.





※ Powerful-Hi can be selected. Sound pressure level: FDTC22/28 44dB(A), FDTC36 46dB(A), FDTC45 48dB(A), FDTC56 49dB(A). Air flow: FDTC22/28 12CMM, FDTC36 13CMM, FDTC45 15CMM, FDTC56 16CMM.

Dimensions

All measurements in mm.

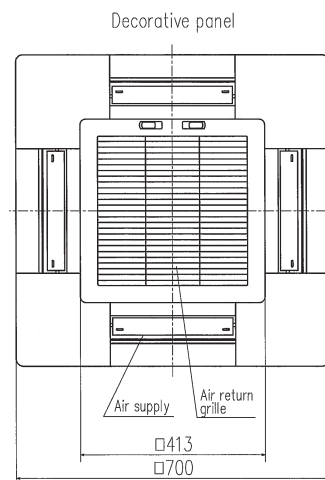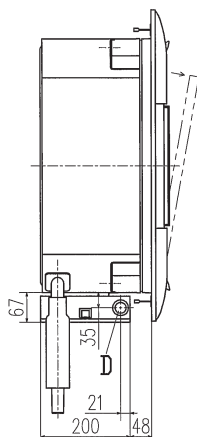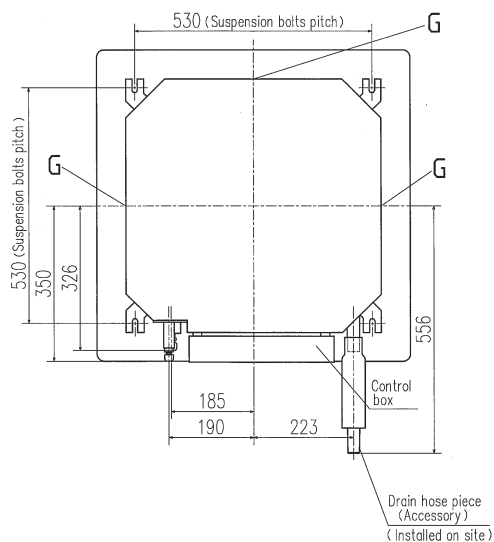


Notes (1) The model name label is attached on the control box lid.
 (2) Prepare the connecting socket (VP20) on site.
 (3) This unit is designed for 2x2 grid ceiling.
 If it is installed on a ceiling other than 2x2 grid ceiling, provide an inspection part on the control box side.

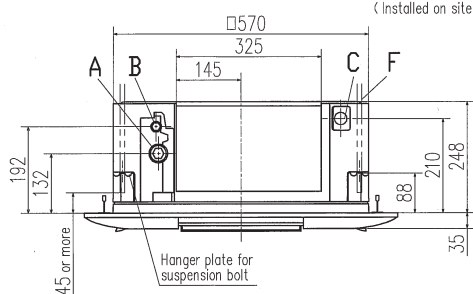


Make a space of 4000 or more between the units when installing more than one.

Symbol	Content		
	Model	FDT022KXE6F, 28KXE6F	FDT036KXE6F, 45KXE6F, 56KXE6F
A	Gas piping	φ9.52 (3/8") (Flare)	φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)	
C	Drain piping	VP20 (I.D.20, O.D.26)	Note (2)
D	Hole for wiring	φ25	
F	Suspension bolts	M10 or M8	
G	Air outlet opening for ducting	(Knock out)	

Ultra slim design at just 248mm above the ceiling

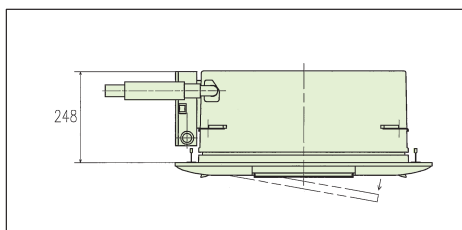

Condensate drain pump included as standard

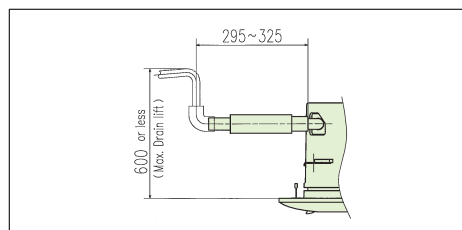



Ceiling Cassette -2way- FDTW

NEW

Model No.

- FDTW28KXE6F FDTW90KXE6F
- FDTW45KXE6F FDTW112KXE6F
- FDTW56KXE6F FDTW140KXE6F
- FDTW71KXE6F



Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless



RCN-TW-E

750mm Drain Pump


Drain can be discharged upward by 750mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.

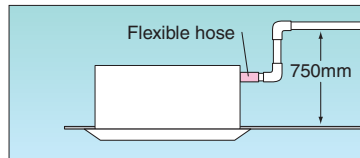

Installation workability


Drainage spout

Drainage flow test can be done easily by use of this drainage spout.

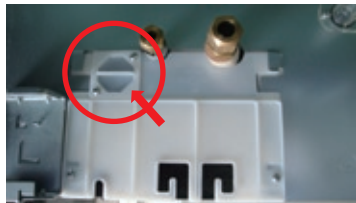

Transparent access hole to drain pan

Dirt condition of the bottom of a drain pan can be checked through this transparent access hole without removing drain pan.

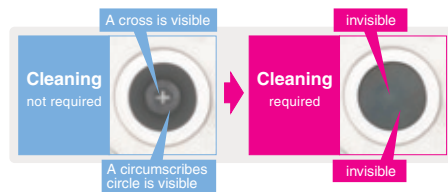

Specifications






Item	Model	FDTW28KXE6F	FDTW45KXE6F	FDTW56KXE6F	FDTW71KXE6F	FDTW90KXE6F	FDTW112KXE6F	FDTW140KXE6F	
Nominal cooling capacity	kW	2.8	4.5	5.6	7.1	9.0	11.2	14.0	
Nominal heating capacity	kW	3.2	5.0	6.3	8.0	10.0	12.5	16.0	
Power source		1 Phase 220-240V, 50Hz							
Power consumption	Cooling	0.09-0.09	0.10-0.10		0.14-0.14	0.19-0.19			
	Heating	0.09-0.09	0.10-0.10		0.14-0.14	0.19-0.19			
Sound pressure level	dB(A)	Hi:38 Me:34 Lo:31					Hi:45 Me:41 Lo:37		
Exterior dimensions H x W x D	mm	Unit:325x820x620 Panel:20x1120x680				Unit:325x1535x620 Panel:20x1835x680			
Net weight	kg	Unit:20 Panel:8.5	Unit:21 Panel:8.5		Unit:23 Panel:8.5	Unit:35 Panel:13			
Air flow *	CMM	Hi:12 Me:10 Lo:9				Hi:27 Me:23 Lo:20			
Outside air intake		Possible							
Panel		TW-PSA-26W-E				TW-PSA-46W-E			
Air filter, Q'ty		Pocket Plastic net x2 (Washable)				Pocket Plastic net x3 (Washable)			
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-TW-E							
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")				

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
* Powerful-Hi can be selected. Sound pressure level: FDTW28/45/56/71 42dB(A), FDTW90/112/140 48dB(A). Air flow: FDTW28/45/56/71 14.5CMM, FDTW90/112/140 31CMM.

Dimensions

All measurements in mm.


FDTW28KXE6F, 45KXE6F, 56KXE6F, 71KXE6F

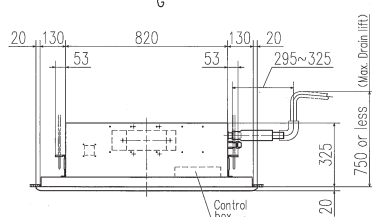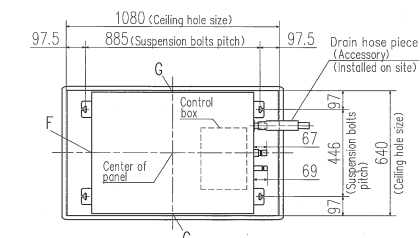

Symbol	Model	28	45,56	71
A	Gas piping	φ9.52 (3/8") (Flare)	φ12.1 (1/2") (Flare)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)	φ9.52 (3/8") (Flare)	φ12.1 (1/2") (Flare)
C	Drain piping	VP25 (I.D. 25, O.D. 32) Note(2)		
D	Hole for wiring			
E	Suspension bolts	(M10)		
F	Outside air opening for ducting	(Knock out)		
G	Air outlet opening for ducting	(Knock out)		






Notes (1) The model name label is attached on the lid of the control box.
(2) Prepare the connecting socket (VP25) on site.

Space for installation and service



Make a space of 4000 or more between the units when installing more than one.


FDTW90KXE6F, 112KXE6F, 140KXE6F

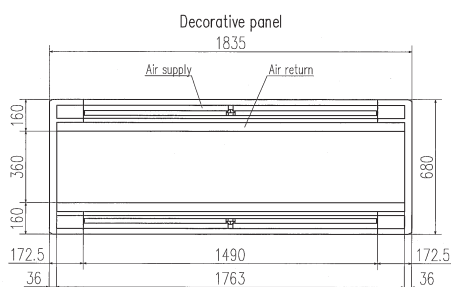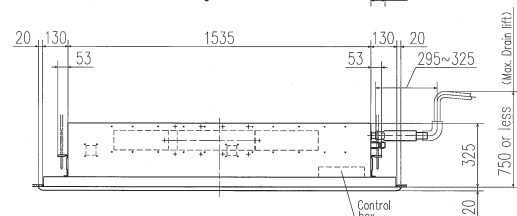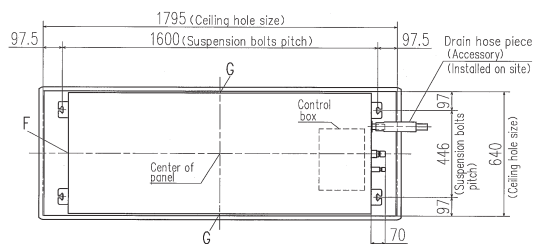

Symbol	Content
A	Gas piping φ15.88 (5/8") (Flare)
B	Liquid piping φ9.52 (3/8") (Flare)
C	Drain piping VP25 (I.D. 25, O.D. 32) Note(2)
D	Hole for wiring
E	Suspension bolts (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)

Notes (1) The model name label is attached on the lid of the control box.
(2) Prepare the connecting socket (VP25) on site.

Space for installation and service



Make a space of 5000 or more between the units when installing more than one.



Ceiling Cassette -1way- FDTS

Model No.
FDTS45KXE6F
FDTS71KXE6F

NEW



Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless




RCN-TS-E

600mm Drain Pump Compact design

Drain can be discharged upward by 600mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.

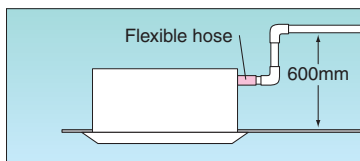

Indoor unit size (W:1,150 x D:565) brings easy installation for 1,200 x 600 ceiling and Panel size (1,250 x 650) is suitable for 1,200 x 600 ceiling. Height is the industry's lowest height level 220mm and weight is 27/28kg only.



Specifications






Item	Model	FDTS45KXE6F	FDTS71KXE6F
Nominal cooling capacity	kW	4.5	7.1
Nominal heating capacity	kW	5.0	8.0
Power source		1 Phase 220-240V, 50Hz	
Power consumption	Cooling	0.04	0.09
	Heating	0.04	0.09
Sound pressure level ※	dB(A)	Hi:40 Me:38 Lo:35	Hi:46 Me:41 Lo:36
Exterior dimensions H x W x D	mm	Unit:220x1150x565 Panel:35x1250x650	
Net weight	kg	Unit:27 Panel:5	Unit:28 Panel:5
Air flow ※	CMM	Hi:12 Me:11 Lo:9.5	Hi:15 Me:12 Lo:9.5
Outside air intake		Possible	
Panel		TS-PSA-3AW-E	
Air filter, Q'ty		Pocket Plastic net x2 (Washable)	
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-TS-E	
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4")	Liquid line:ø9.52(3/8")
		Gas line:ø12.7(1/2")	Gas line:ø15.88(5/8")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDTS45 42dB(A), FDTS71 49dB(A). Air flow: FDTS45 13CMM, FDTS71 17CMM.

Dimensions

All measurements in mm.

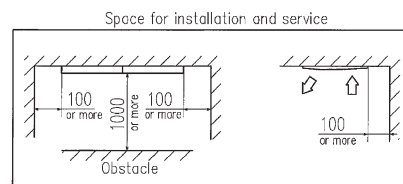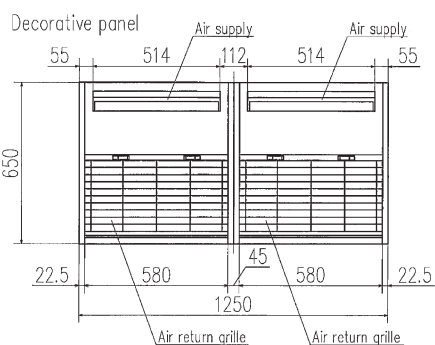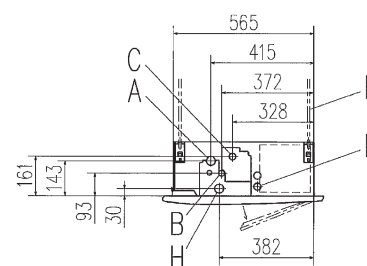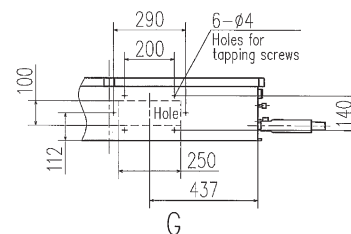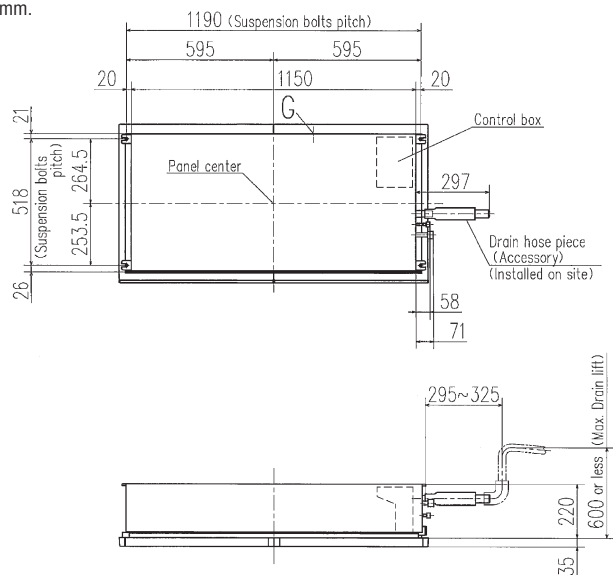

Make a space of 4000 or more between the units when installing more than one.

Symbol	Content		
	Model	45	71
A	Gas piping	φ12.7 (1/2") (Flare)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)	φ9.52 (3/8") (Flare)
C	Drain piping	VP25 (I.D.25 , O.D.32) Note (2)	
D	Hole for wiring		
F	Suspension bolts	(M10)	
G	Outside air opening for ducting	(Knock out)	
H	Drain piping (Gravity drainage)	VP25 (I.D.25 , O.D.32)	



Ceiling Cassette -1way Compact-FDTQ

Model No.
 FDTQ22KXE6F
 FDTQ28KXE6F
 FDTQ36KXE6F



Fits into standard
 600 x 600 ceiling

Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3

Wireless




RCN-KIT3-E

Compact design


- Comfortable effective cooling for small rooms, with low fan speed air flow at just 5.4m³/min.



Optional wide panel shown for solid ceiling



Condensate drain pump included as standard

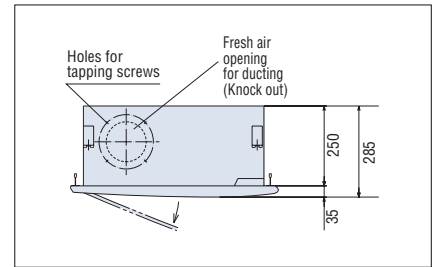

Ultra slim design at just 250mm above the ceiling

Specifications

Item	Model	FDTQ22KXE6F				FDTQ28KXE6F				FDTQ36KXE6F			
Panel Name		Direct blow panel		Duct panel		Direct blow panel		Duct panel		Direct blow panel		Duct panel	
Panel mode (Option)		TQ-PSA-15W-E	TQ-PSB-15W-E	QR-PNA-14W-ER	QR-PNB-14W-ER	TQ-PSA-15W-E	TQ-PSB-15W-E	QR-PNA-14W-ER	QR-PNB-14W-ER	TQ-PSA-15W-E	TQ-PSB-15W-E	QR-PNA-14W-ER	QR-PNB-14W-ER
Nominal cooling capacity	kW	2.2				2.8				3.6			
Nominal heating capacity	kW	2.5				3.2				4.0			
Power source		1 Phase 220-240V, 50Hz											
Power consumption	Cooling	0.05-0.07				0.05-0.07				0.05-0.07			
	Heating	0.05-0.07				0.05-0.07				0.05-0.07			
Sound pressure level [※]	dB(A)	Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33	
Exterior dimensions H x W x D	Unit	250x570x570											
	Panel	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650
Net weight	kg	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3
Air flow [※]	CMM	Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5	
Outside air intake		Possible											
Air filter, Q'ty		Pocket Plastic net x1 (Washable)											
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E											
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")											
		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")											


1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDTQ22/38/36 45dB(A). Air flow: FDTQ22/38/36 8CMM.


Dimensions

All measurements in mm.

Direct blow panel (TQ-PSA-15W-E)




Direct blow panel (TQ-PSB-15W-E)






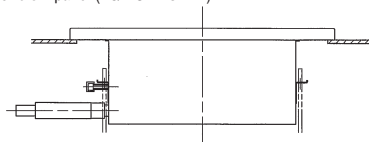


Symbol	Model	Content
		FDTQ22KXE6F, 28KXE6F FDTQ36KXE6F
A	Gas piping	φ9.52 (3/8") (Flare) φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C	Drain piping	VP20 (I.D. 20, O.D. 26) Note (2)
D	Hole for wiring	φ30
E	Suspension bolts	(M10)
F 1, 2	Outside air opening for ducting	(Knock out)

Duct panel (QR-PNA-14W-ER)

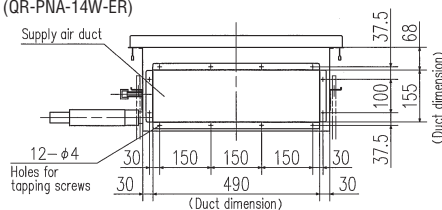

Duct panel (QR-PNB-14W-ER)

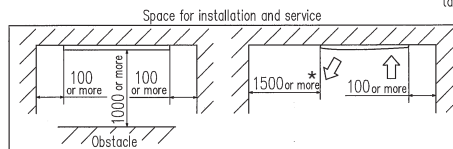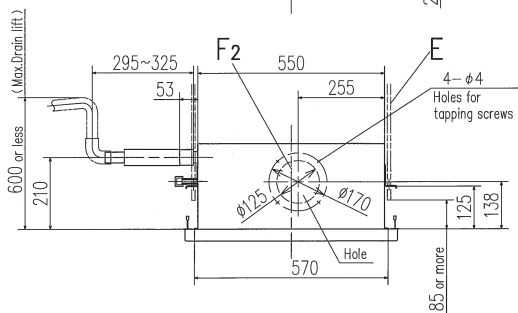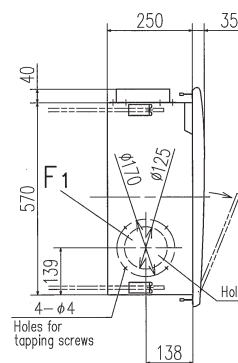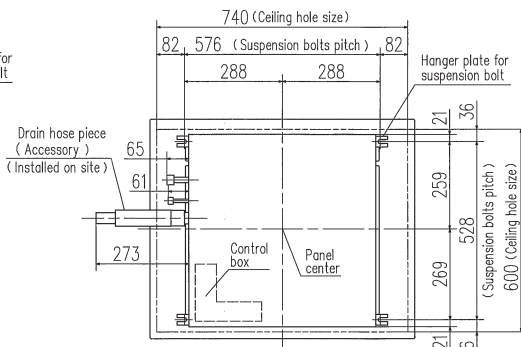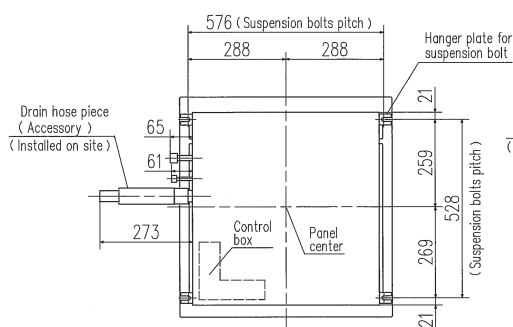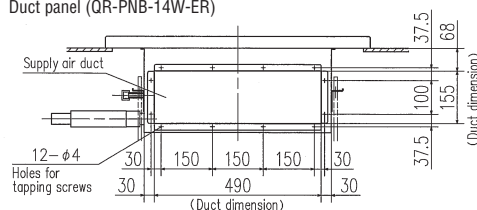


Make a space of 3000 or more between the units when installing more than one.

Notes



- (1) The model name label is attached on the fan case inside the air return grille.
- (2) Prepare the connecting socket (VP20) on site.
- (3) This unit is designed for 2X2 grid ceiling.

* In case of Direct blow panel

Decorative panel

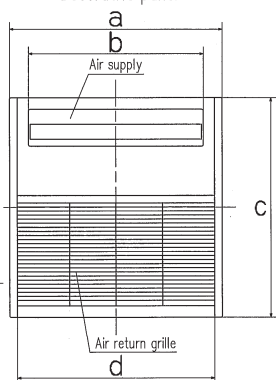

Decorative panel

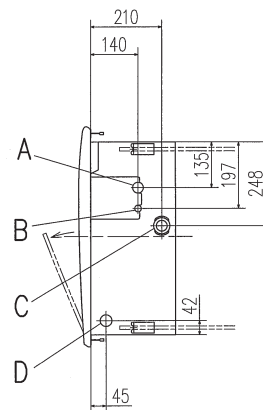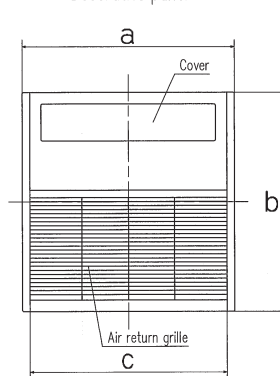

Dimension Table

Unit:mm

model	a	b	c	d
TQ-PSA-15W-E	625	514	650	580
TQ-PSB-15W-E	780	514	650	580

Dimension Table

Unit:mm

model	a	b	c
QR-PNA-14W-ER	625	650	580
QR-PNB-14W-ER	780	650	580



Duct Connected -High Static Pressure- FDU

NEW

- Model No.**
 FDU45KXE6F
 FDU56KXE6F
 FDU71KXE6F
 FDU90KXE6F
 FDU112KXE6F
 FDU140KXE6F
 FDU160KXE6F



Remote control (option)




External Static Pressure(E.S.P) control

You can set External Static Pressure (E.S.P.) by method of manual setting on remote control. Indoor unit will control fan-speed to keep rated air flow volume at each fan speed setting. You can set required E.S.P. by wired remote control that calculated with the set air flow rate and pressure loss of the duct connected.



E.S.P. button

External Static Pressure (E.S.P.) can be set by E.S.P. button.

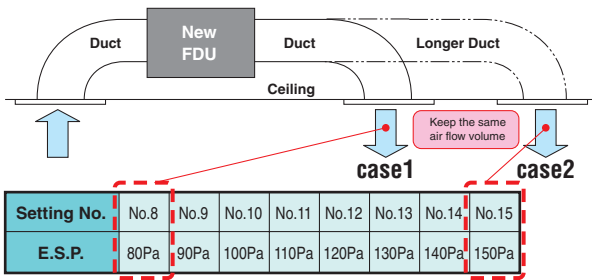


*Range of 80~150 Pa is set at ex-factory default.
 Range of 10~200 Pa is available by setting SW8-4 switch on at site.

<Expansion of external static pressure range>


Current **10~130Pa** → New **10~200Pa**

Thin design




	Current	New	
FDU71KXE6F	297	280	17mm less!!
FDU112/140KXE6F	350	280	70mm less!!

Reduction of weight



	Current	New	
FDU71KXE6F	40	34	6kg less!!
FDU90KXE6F	63	34	29kg less!!
FDU112/140KXE6F	63	54	9kg less!!

Reduction of sound pressure level

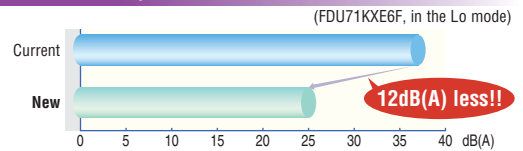

Specifications



Item	Model	FDU45KXE6F	FDU56KXE6F	FDU71KXE6F	FDU90KXE6F	FDU112KXE6F	FDU140KXE6F	FDU160KXE6F				
Nominal cooling capacity	kW	4.5	5.6	7.1	9.0	11.2	14.0	16.0				
Nominal heating capacity	kW	5.0	6.3	8.0	10.0	12.5	16.0	18.0				
Power source		1 Phase 220-240V, 50Hz										
Power consumption	Cooling	0.10-0.10/0.10			0.24-0.25/0.24		0.31-0.32/0.31		0.35-0.36/0.35		0.42-0.43/0.42	
	Heating	0.10-0.10/0.10			0.24-0.25/0.24		0.31-0.32/0.32		0.35-0.36/0.35		0.42-0.43/0.42	
Sound pressure level	dB(A)	Hi:32 Me:29 Lo:26			Hi:33 Me:29 Lo:25		Hi:38 Me:36 Lo:30		Hi:40 Me:34 Lo:29		Hi:40 Me:35 Lo:30	
Exterior dimensions H x W x D	mm	280x750x635			280x950x635		280x1370x740					
Net weight	kg	29			34		54					
Air flow (Standard)	CMM	Hi:10 Me:9 Lo:8			Hi:19 Me:15 Lo:10		Hi:28 Me:25 Lo:19		Hi:32 Me:26 Lo:20		Hi:35 Me:28 Lo:22	
External Static pressure	Pa	200 (at 13CMM)			200 (at 24CMM)		200 (at 36CMM)		200 (at 39CMM)		200 (at 48CMM)	
Outside air intake		Possible										
Air filter, Q'ty		Procure locally										
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E										
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")				Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")						

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 60Pa.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. Powerful-Hi can be selected. Sound pressure level: FDU45/56 37dB(A), FDU71/90 38dB(A), FDU112 44dB(A), FDU140 45dB(A), FDU160 47dB(A). Air flow: FDU45/56 13CMM, FDU71/90 24CMM, FDU112 36CMM, FDU140 39CMM, FDU160 48CMM.



Dimensions

All measurements in mm.

FDU45KXE6F, 56KXE6F


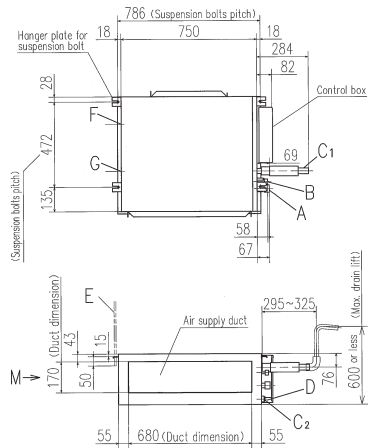


Space for installation and service
Select either of two cases to keep space for installation and services.





Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C1	Drain piping VP25 (I.D.25, O.D.32)
C2	Drain piping (Gravily drainage) VP20 (I.D.20, O.D.26) Note (2)
D	Hole for wiring (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)
H	Inspection hole (450X450)

FDU71KXE6F, 90KXE6F


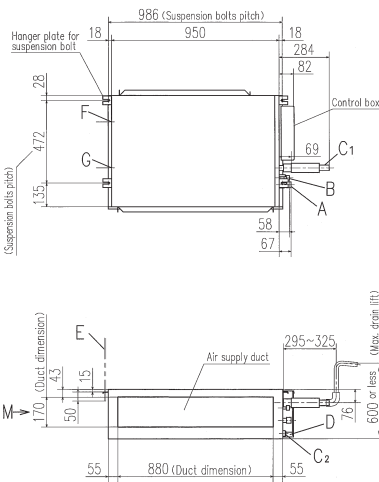


Space for installation and service
Select either of two cases to keep space for installation and services.





Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C1	Drain piping VP25 (I.D.25, O.D.32)
C2	Drain piping (Gravily drainage) VP20 (I.D.20, O.D.26) Note (2)
D	Hole for wiring (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)
H	Inspection hole (450X450)

FDU112KXE6F, 140KXE6F, 160KXE6F

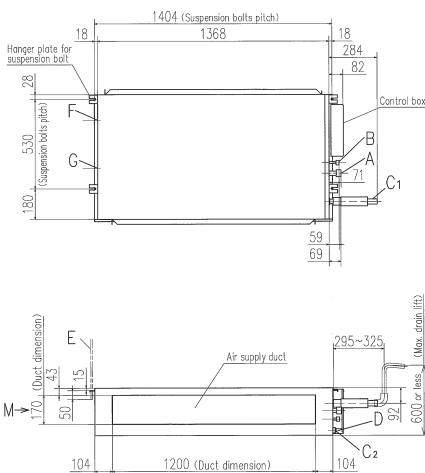

Space for installation and service
Select either of two cases to keep space for installation and services.



Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C1	Drain piping VP25 (I.D.25, O.D.32)
C2	Drain piping (Gravily drainage) VP20 (I.D.20, O.D.26) Note (2)
D	Hole for wiring (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)
H	Inspection hole (450X450)




Duct Connected -High Static Pressure- FDU

Model No.
FDU224KXE6F
FDU280KXE6F



Remote control (option)

Wired



Wireless




RCN-KIT3-E



Fan control kit (option)
(100-200Pa)
U-FCRA

Adaptability to higher static pressures

High static pressure of 200Pa

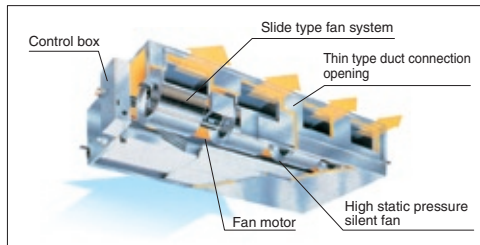

Specifications

Item	Model	FDU224KXE6F	FDU280KXE6F
Nominal cooling capacity	kW	22.4	28.0
Nominal heating capacity	kW	25.0	31.5
Power source		1 Phase 220-240V, 50Hz	
Power consumption	Cooling kW	0.94-1.03	0.96-1.05
	Heating kW	0.86-0.90	0.88-0.96
Sound pressure level	dB(A)	Hi:51	Hi:52
Exterior dimensions H x W x D	mm	360x1570x830	
Net weight	kg	92	
Air flow (Standard)	CMM	Hi:51	Hi:68
External Static pressure	Pa	200	
Outside air intake		Possible(on Return duct)	
Air filter, Q'ty		Procure locally	
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E	
Installation data			
Refrigerant piping size	mm(in)	Liquid line:ø9.52(3/8") Gas line:ø19.05(3/4")	Liquid line:ø9.52(3/8") Gas line:ø22.22(7/8")




1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 100Pa.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. Values of sound pressure level become increased 5dB(A), when external static pressure is 200Pa (factory setting).
 4. Values of air flow volume are those at external static pressure 200Pa (factory setting).

Dimensions

All measurements in mm.

Symbol	Content		
	Model	224	280
A	Gas piping	φ19.05 (3/4") (Brazing)	φ22.22 (7/8") (Brazing)
B	Liquid piping	φ9.52 (3/8") (Brazing)	
C	Drain piping	VP25	
D	Hole for wiring	φ25	
E	Suspension bolts	(M10)	
F	Inspection hole	(600X600)	
G	Inspection hole	(900X1730)	

Note (1) The model name label is attached on the side plate of the control box.

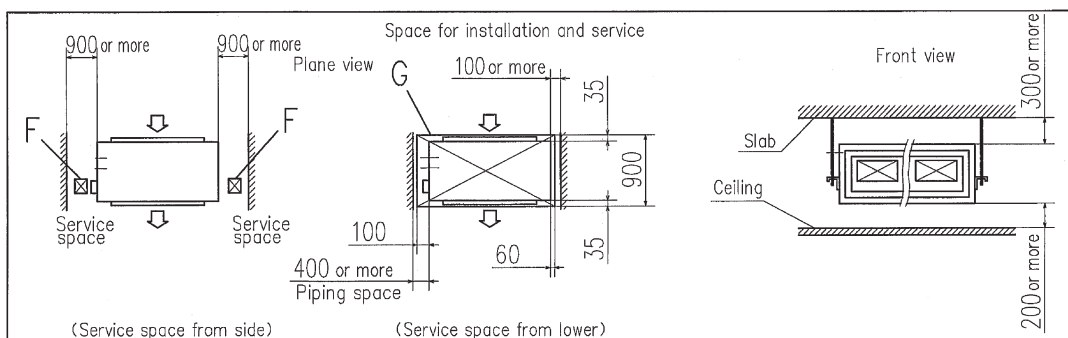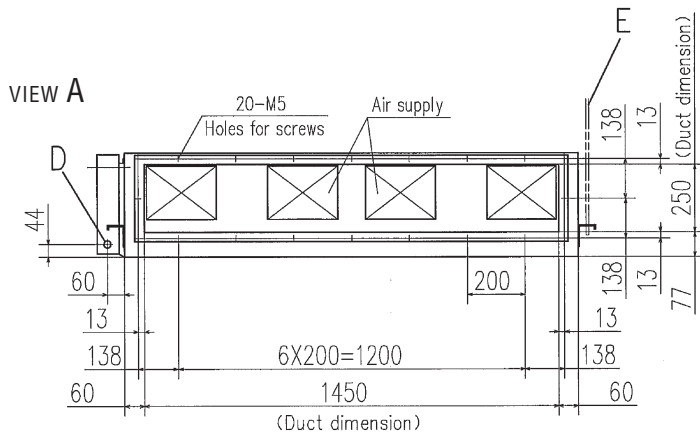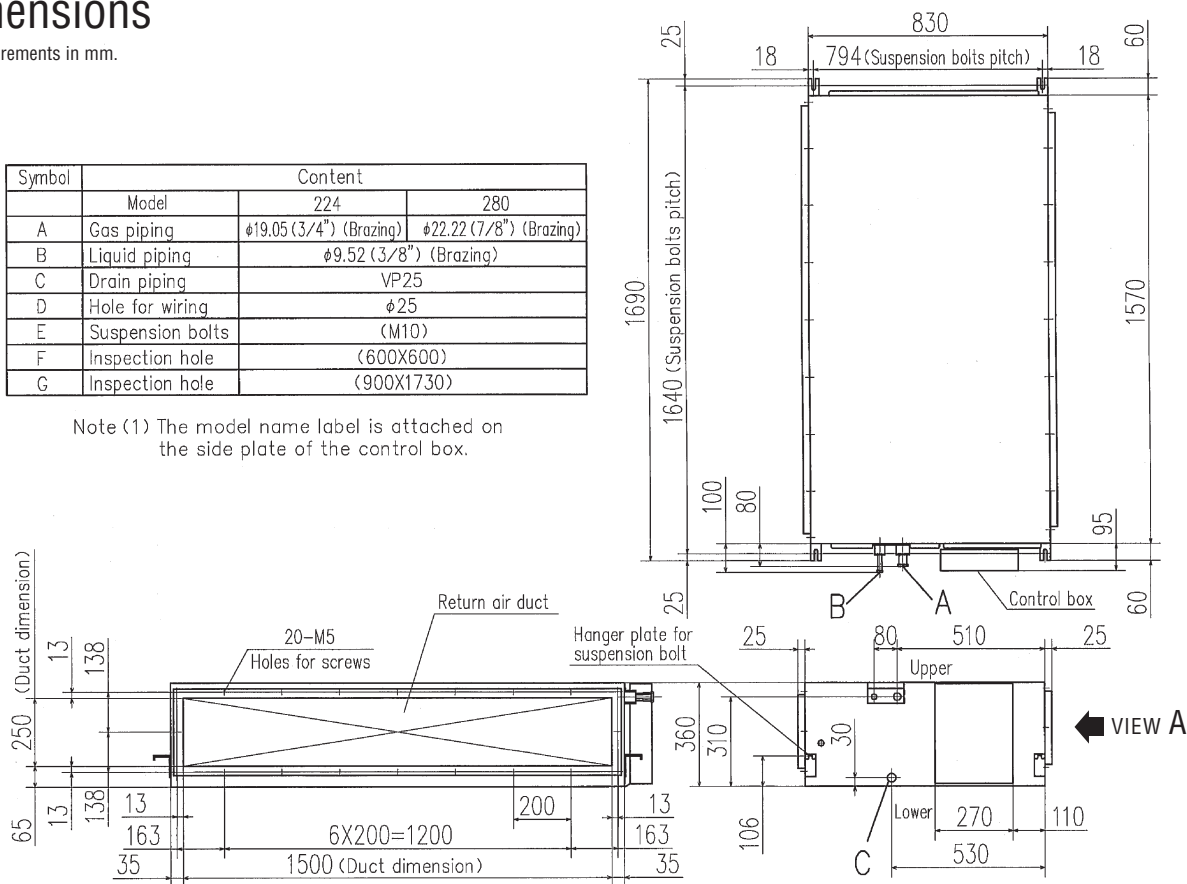



Duct Connected -Low/Middle Static Pressure- FDUM



Model No.

- FDUM22KXE6F FDUM71KXE6F
- FDUM28KXE6F FDUM90KXE6F
- FDUM36KXE6F FDUM112KXE6F
- FDUM45KXE6F FDUM140KXE6F
- FDUM56KXE6F FDUM160KXE6F

Filter kit (option)

- UM-FL1E : for 22~56
- UM-FL2E : for 71, 90
- UM-FL3E : for 112, 140, 160



*Filter pressure loss:5pa

Remote control (option)

Wired

Wireless



RC-EX1A

RC-E5

RCH-E3

RCN-KIT3-E


Improvement of low tap noise dB(A)

Air flow sound was reduced by new fan and casing design.
Refrigerant flow sound was decreased by advanced refrigerant distributor design.


Indoor model name		22/28/36	45/56	71	90	112	140
NEW		26	26	25	25	30	29
Current FDUM	dB(A)	28	29	29	30	32	33
Improvement		2	3	4	5	2	4

Thin design

The height of all FDUM models is only 280mm.




FDUM112/140KXE6F



FDUM22~90KXE6F

Improvement of the serviceability

Fan unit (impeller and motor) can be pulled out from the right side or the bottom side of the unit. Maintenance can be available from the right side or the bottom side.



Specifications

Item	Model	FDUM22KXE6F	FDUM28KXE6F	FDUM36KXE6F	FDUM45KXE6F	FDUM56KXE6F	FDUM71KXE6F	FDUM90KXE6F	FDUM112KXE6F	FDUM140KXE6F	FDUM160KXE6F	
Nominal cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0	
Nominal heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	18.0	
Power source		1 Phase 220-240V, 50Hz										
Power consumption	Cooling	0.10-0.10					0.20-0.20			0.29-0.29	0.33-0.33	0.45-0.45
	Heating	0.10-0.10					0.20-0.20			0.29-0.29	0.33-0.33	0.45-0.45
Sound pressure level**	dB(A)	Hi:32 Me:29 Lo:26					Hi:33 Me:29 Lo:25			Hi:38 Me:36 Lo:30	Hi:40 Me:34 Lo:29	Hi:40 Me:35 Lo:30
Exterior dimensions H x W x D	mm	280 x 750 x 635					280 x 950 x 635			280 x 1370 x 740		
Net weight	kg	29					34			54		
Air flow**	CMM	Hi:10 Me:9 Lo:8					Hi:19 Me:15 Lo:10			Hi:28 Me:25 Lo:19	Hi:32 Me:26 Lo:20	Hi:35 Me:28 Lo:22
External Static pressure	Pa	100(at 13CMM)					100 (at 24CMM)			100 (at 36CMM)	100 (at 39CMM)	100 (at 48CMM)
Outside air intake		Possible										
Air filter, Q'ty		Procure locally										
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E										
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")			Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")				

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 35Pa(22/28/36/45/56/71/90), 60Pa(112/140/160).



2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

** Powerful-Hi can be selected. Sound pressure level: FDUM22/28/36/45/56 37dB(A), FDUM71/90 38dB(A), FDUM112 44dB(A), FDUM140 45dB(A), FDUM160 47dB(A). Air flow: FDUM22/28/36/45/56 13CMM, FDUM71/90 24CMM, FDUM112 36CMM, FDUM140 39CMM, FDUM160 48CMM.

Dimensions


All measurements in mm.

FDUM22KXE6F, 28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F


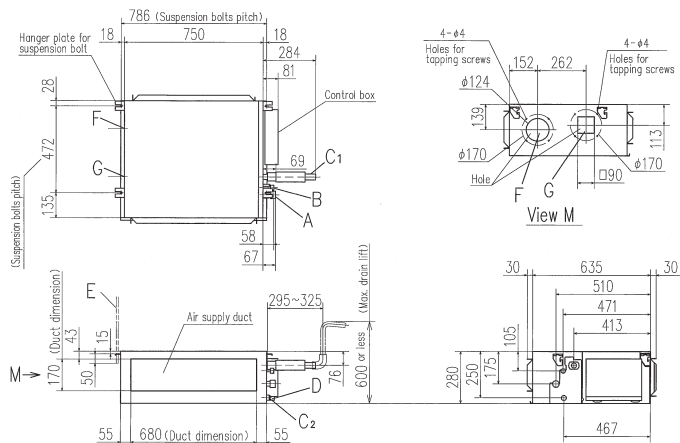


Notes (1) The model name label is attached on the lid of the control box.
(2) Prepare the connecting socket (VP20 or VP25) on site.

Symbol	Model	Content
A	Gas piping	22,28
B	Liquid piping	36,45,56
C1	Drain piping	φ9.52 (3/8") (Flare) φ12.7 (1/2") (Flare)
C2	Drain piping (Gravity drainage)	φ6.35 (1/4") (Flare) VP20 (Standard) or VP25 (Used with attached socket) Note (2)
D	Hole for wiring	VP20 (Standard) or VP25 (Used with attached socket)
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(φ150) (Knock out)
G	Air outlet opening for ducting	(φ125) (Knock out)
H	Inspection hole	(450X450)

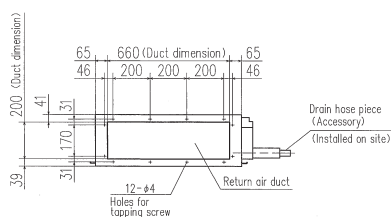


FDUM71KXE6F, 90KXE6F


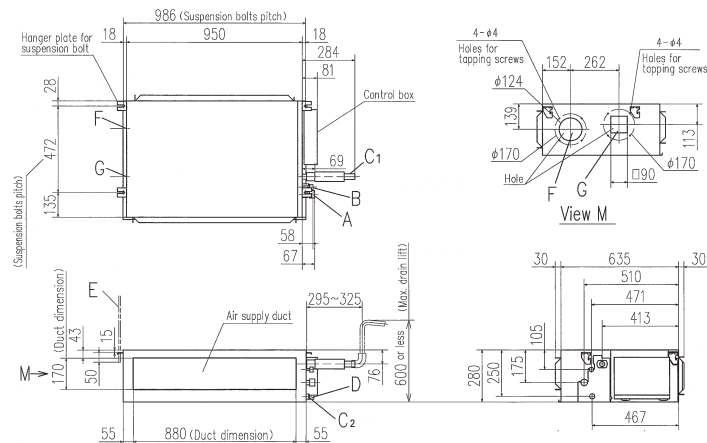


Notes (1) The model name label is attached on the lid of the control box.
(2) Prepare the connecting socket (VP20 or VP25) on site.

Symbol	Model	Content
A	Gas piping	71,88
B	Liquid piping	90,90
C1	Drain piping	φ9.52 (3/8") (Flare) φ15.88 (5/8") (Flare)
C2	Drain piping (Gravity drainage)	φ6.35 (1/4") (Flare) VP20 (Standard) or VP25 (Used with attached socket) Note (2)
D	Hole for wiring	VP20 (Standard) or VP25 (Used with attached socket)
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(φ150) (Knock out)
G	Air outlet opening for ducting	(φ125) (Knock out)
H	Inspection hole	(450X450)

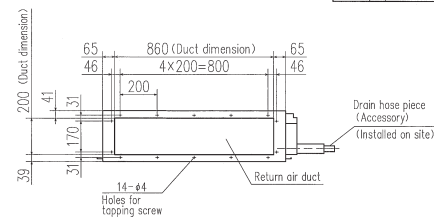


FDUM112KXE6F, 140KXE6F, 160KXE6F

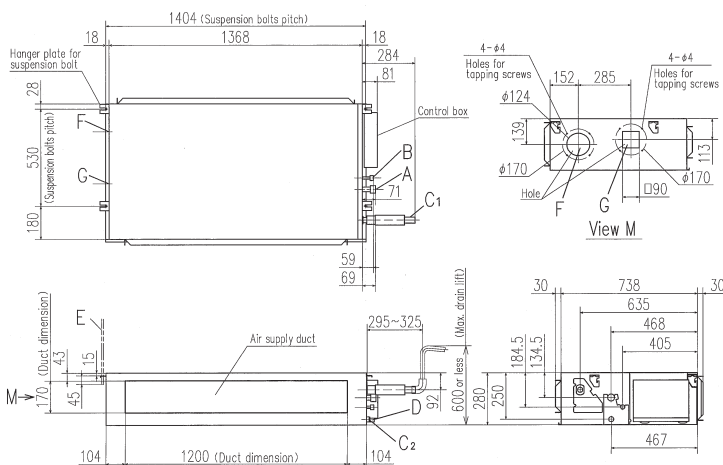

Notes (1) The model name label is attached on the lid of the control box.
(2) Prepare the connecting socket (VP20 or VP25) on site.


Symbol	Model	Content
A	Gas piping	112,12
B	Liquid piping	140,140
C1	Drain piping	φ9.52 (3/8") (Flare) φ15.88 (5/8") (Flare)
C2	Drain piping (Gravity drainage)	φ6.35 (1/4") (Flare) VP20 (Standard) or VP25 (Used with attached socket) Note (2)
D	Hole for wiring	VP20 (Standard) or VP25 (Used with attached socket)
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(φ150) (Knock out)
G	Air outlet opening for ducting	(φ125) (Knock out)
H	Inspection hole	(450X450)

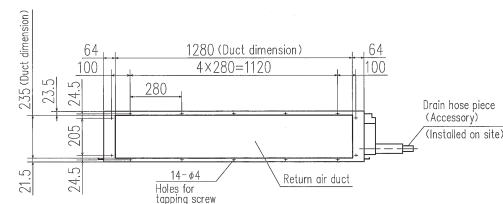




Duct Connected (thin) -Low Static Pressure- FDUT

NEW

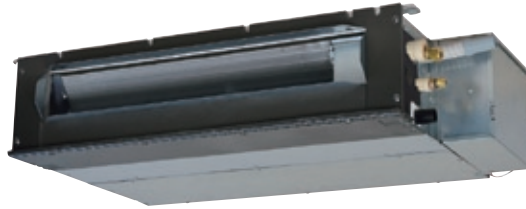

- Model No.**
 FDUT15KXE6F-E
 FDUT22KXE6F-E
 FDUT28KXE6F-E
 FDUT36KXE6F-E
 FDUT45KXE6F-E
 FDUT56KXE6F-E
 FDUT71KXE6F-E

Remote control (option)



Expansion of lineup

	15KXE6F-E	22KXE6F-E	28KXE6F-E	36KXE6F-E	45KXE6F-E	56KXE6F-E	71KXE6F-E
Current		●	●	●	●	●	
New	●*	●	●	●	●	●	●


FDUT15KXE6F-E: Suitable for small divided rooms *Comming soon
FDUT71KXE6F-E: Suitable for large rooms

(1) Can not be connected to some KX outdoor units. Please consult your dealer for further details.
 (2) Regarding pipe length (150m or more is required) and temperature condition (the lowest is 10°C) in the cooling operation etc., please refer to our technical manual.

Option

Item	Contents	for FDUT15/22/28/36KXE6F-E	for FDUT45/56KXE6F-E	for FDUT71KXE6F-E
Duct kit (out)	①	UT-SAT1EF	UT-SAT2EF	UT-SAT3EF
Filter set	②+③	UT-FL1EF	UT-FL2EF	UT-FL3EF

Filter pressure loss : 5 Pa

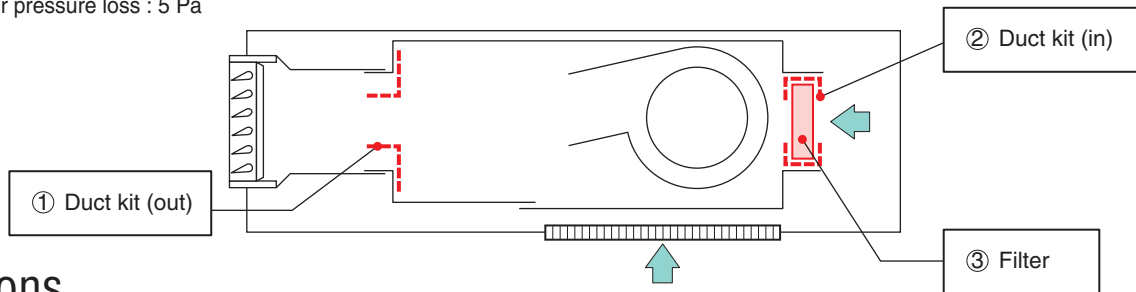

Specifications


Item	Model	FDUT15KXE6F-E	FDUT22KXE6F-E	FDUT28KXE6F-E	FDUT36KXE6F-E	FDUT45KXE6F-E	FDUT56KXE6F-E	FDUT71KXE6F-E
Nominal cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6	7.1
Nominal heating capacity	kW	1.7	2.5	3.2	4.0	5.0	6.0	8.0
Power source		1 Phase 220-240V, 50Hz						
Power consumption	Cooling	0.06-0.06/0.06	0.07-0.07			0.08-0.08		0.08-0.08
	Heating	0.06-0.06/0.06	0.07-0.07			0.08-0.08		0.07-0.07
Sound pressure level ①	dB(A)	Hi:28 Me:26 Lo:22	Hi:32 Me:30 Lo:26			Hi:34 Me:32 Lo:28	Hi:35 Me:33 Lo:30	Hi:35 Me:31 Lo:28
Sound pressure level ②	dB(A)	Hi:32 Me:29 Lo:25	Hi:32 Me:29 Lo:26			Hi:36 Me:33 Lo:28	Hi:38 Me:33 Lo:29	Hi:41 Me:37 Lo:32
Exterior dimensions	H x W x D	200x750x500			200x950x500		220x1150x565	
Net weight	kg	21			22		25	
Air flow (Standard)	CMM	Hi:6 Me:5 Lo:4	Hi:7.5 Me:6 Lo:5			Hi:8.5 Me:7 Lo:5.5	Hi:11.5 Me:9 Lo:7	Hi:12.5 Me:9 Lo:7.2
External Static pressure	Pa	Standard:10, Max:35				Standard:10, Max:50		
Outside air intake		Not possible						
Suction guard(Air filter)		Procure locally						
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E						
Installation data	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 10Pa.
 2. The data of nominal cooling and heating capacity and sound pressure level are measured with 10Pa of external static pressure.
 3. The sound level indicates the value of rear-intake type with duct in anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 4. Sound pressure levels are values when 2m supply duct and 1m return duct are connected.
 ① : Mike position is 1.5m below unit. ② : Mike position is 1m in front and 1m below the air supply duct.

Dimensions


All measurements in mm.

FDUT15KXE6F-E, 22KXE6F-E, 28KXE6F-E, 36KXE6F-E

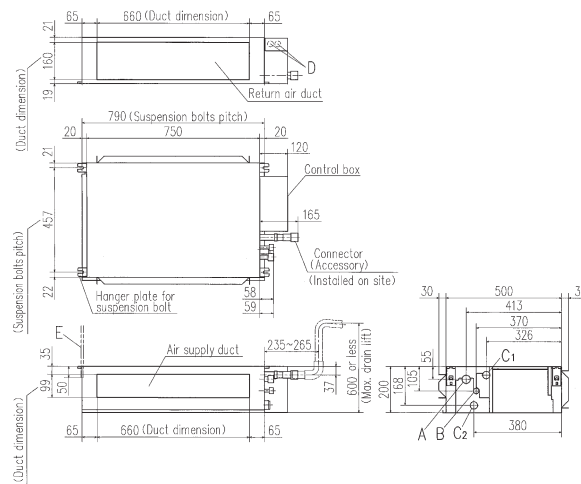


Symbol	Model	Content
A	Gas piping	φ9.52 (3/8") (Flare) φ17.1 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C1	Drain piping	VP25 (1/2", O.D.32) (Used with attached connector)
C2	Drain piping (Gravity drainage)	VP25 (1/2", O.D.32) (Used with attached connector)
D	Hole for wiring	φ25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450, 1200X70)

Space for installation and service

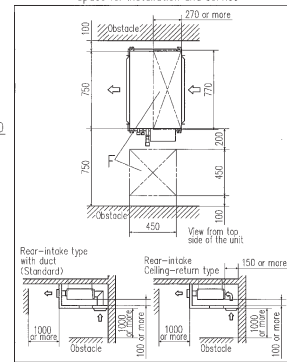


FDUT45KXE6F-E, 56KXE6F-E

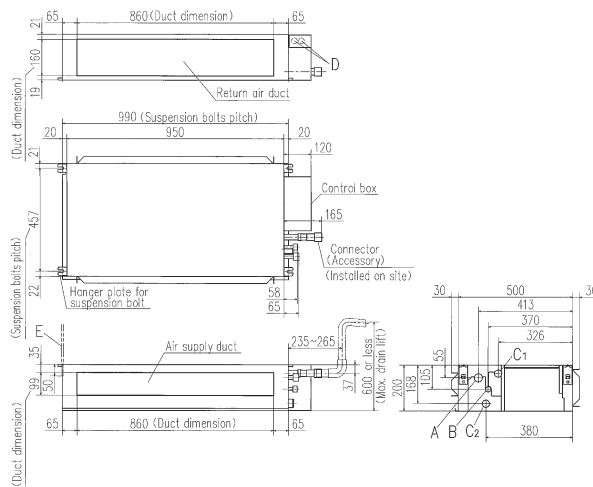


Symbol	Model	Content
A	Gas piping	φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C1	Drain piping	VP25 (1/2", O.D.32) (Used with attached connector)
C2	Drain piping (Gravity drainage)	VP25 (1/2", O.D.32) (Used with attached connector)
D	Hole for wiring	φ25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450, 1200X70)

Space for installation and service

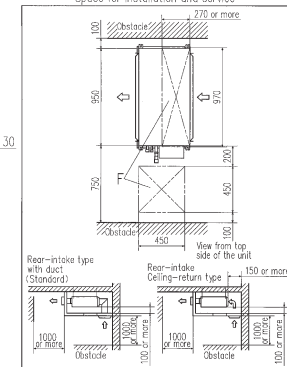


FDUT71KXE6F-E

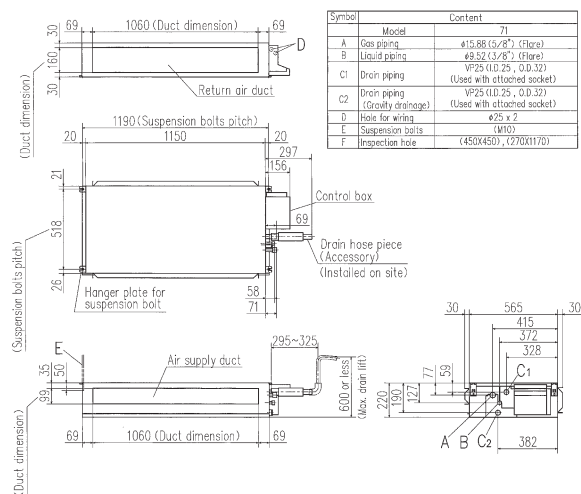

Symbol	Model	Content
A	Gas piping	φ15.88 (5/8") (Flare)
B	Liquid piping	φ9.52 (3/8") (Flare)
C1	Drain piping	VP25 (1/2", O.D.32) (Used with attached socket)
C2	Drain piping (Gravity drainage)	VP25 (1/2", O.D.32) (Used with attached socket)
D	Hole for wiring	φ25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450, 1200X1170)


Space for installation and service

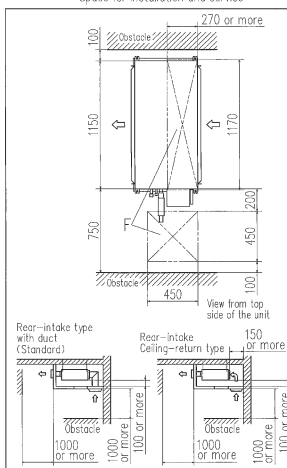



Duct Connected (Compact & Flexible) FDUH

Model No.
FDUH22KXE6F
FDUH28KXE6F
FDUH36KXE6F



Drain up kit (option)
(600mm)
UH-DU-E

Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3

Wireless



RCN-KIT3-E


Filter kit (option)
UH-FL1E



*Filter pressure loss:5pa

Compact and thin size, light weight

Our leading high technology has realized the best solution for air conditioning in hotels with compact and thin size units and high energy efficiency. In addition, weight is only 20kg.




Quiet operation

The lowest sound level in the industry can ensure comfortable stay and rest in hotels.

Installation Flexibility

Control box and drain piping can be installed on both side of the unit and air intake to the unit is available from bottom or back side. Our highest technology can satisfy diverse installation requirements.

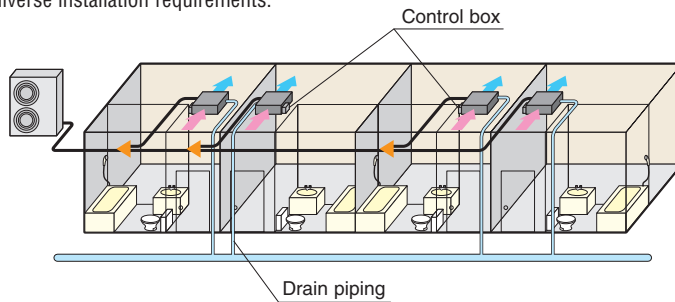

Wired remote control



RCH-E3 (option)

Simple remote control

Considering specialized usage in hotel rooms, control buttons are limited only to minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

Specifications


Item	Model	FDUH22KXE6F	FDUH28KXE6F	FDUH36KXE6F
Nominal cooling capacity	kW	2.2	2.8	3.6
Nominal heating capacity	kW	2.5	3.2	4.0
Power source		1 Phase 220-240V, 50Hz		
Power consumption	Cooling	0.05-0.07		
	Heating	0.05-0.07		
Sound pressure level ※	dB(A)	HI: 33 Me: 30 Lo: 27		
Exterior dimensions	HxWxD	257x570x530		
Net weight	kg	22		
Air flow ※	CMM	HI: 7 Me: 6.5 Lo: 6		
External static pressure	Pa	30		
Outside air intake		Not possible		
Air filter, Q'ty		Procure locally		
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E		
Installation data	mm(in)	Liquid line:ø6.35(1/4")		Liquid line:ø6.35(1/4")
	Refrigerant piping size	Gas line:ø9.52(3/8")		Gas line:ø12.7(1/2")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.





※ Powerful-Hi can be selected. Sound pressure level: FDUH22/28/36 39dB(A). Air flow: FDUH22/28/36 8.5CMM.

Dimensions



All measurements in mm.

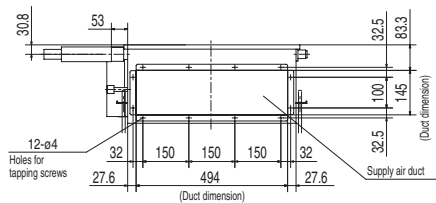

Symbol	Content		
	Model	FDUH22KXE6F/28KXE6F	FDUH36KXE6F
A	Gas piping	ø9.52 (3/8") (Flare)	ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)	
C ₁ , C ₂	Drain piping	VP20(I, D.20, O.D.26) Note (2)	
D	Hole for wiring	ø30	
E	Suspension bolts	(M10)	
F	Inspection hole	(635X890) Note (3)	

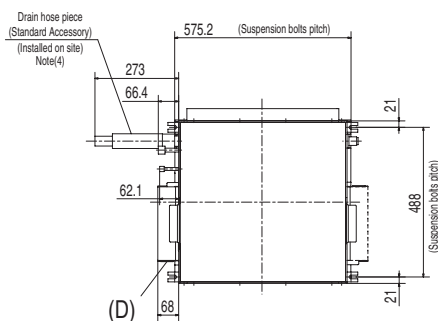


Unit:mm

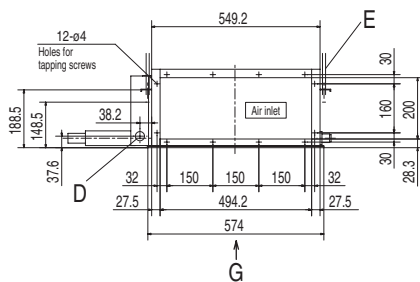

View G

In case of Bottom air intake




View G

(After bottom plate is replaced to back side)

Notes

- (1) The model name label is attached on the fan case inside the air return grille.
- (2) Prepare the connecting socket (VP20) on site. (As for drain piping, it is possible to choose C₁ or C₂)
- (3) When control box is located on the reverse side, installation space should be modified to new location.
- (4) Control box and Drain hose piece are able to be relocated on the reverse side.

Simple remote control





Wall Mounted FDK

- Model No.**
 FDK22KXE6F
 FDK28KXE6F
 FDK36KXE6F
 FDK45KXE6F
 FDK56KXE6F
 FDK71KXE6F



FDK22-56



FDK71

Remote control (option)

Wired




RC-EX1A RC-E5 RCH-E3

Wireless



RCN-K-E : FDK22-56
 RCN-K71-E : FDK71

Innovative Design




Fast ← → Slow
 Colors in the figure show the air speed.

New FDK models adopt the air flow design that's proven to minimise resistance in a CFD analysis to achieve uniform air conditioning to the furthest corners of the room.


Flap control system

Selection of flap position is possible. A flap can be set at different angles.

*RCH-E3 is not applicable to the Flap control system.



Installation Workability



The new slimmer design allows easy & neat installation even in tight spaces.

Improved Maintainability

Also included is a new easy clean mechanism where the front panel is opened/closed simply from the bottom to easily access the detachable filters.

Specifications

Item	Model	FDK22KXE6F	FDK28KXE6F	FDK36KXE6F	FDK45KXE6F	FDK56KXE6F	FDK71KXE6F	
Nominal cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Nominal heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Power source		1 Phase 220-240V, 50Hz						
Power consumption	Cooling	0.05			0.05		0.09	
	Heating	0.04			0.05		0.09	
Sound pressure level ※	Cooling	Hi:35 Me:33 Lo:31		Hi:41 Me:35 Lo:31	Hi:42 Me:37 Lo:33	Hi:46 Me:42 Lo:37	Hi:47 Me:43 Lo:39	
	Heating	Hi:35 Me:33 Lo:31		Hi:39 Me:35 Lo:31	Hi:42 Me:37 Lo:33	Hi:46 Me:42 Lo:37	Hi:47 Me:43 Lo:39	
Exterior dimensions H x W x D	mm	298 x 840 x 259					318 x 1098 x 248	
Net weight	kg	12			12.5	13	15.5	
Air flow ※	CMM	Hi:8 Me:7 Lo:6		Hi:10 Me:9 Lo:7	Hi:11 Me:9 Lo:7	Hi:14 Me:12 Lo:10	Hi:21 Me:18 Lo:15	
Outside air intake		Not possible						
Air filter, Q'ty		Polypropylene net x2 (Washable)						
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-K-E (for FDK22-56), RCN-K71-E (for FDK71)						
Installation data		Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.


2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDK22/28 38dB(A), FDK36 48dB(A)(Cooling)&42dB(A)(Heating), FDK45 48dB(A)(Cooling)&43dB(A)(Heating), FDK56 48dB(A)(Cooling)&47dB(A)(Heating), FDK71 48dB(A). Air flow: FDK22/28 11CMM, FDK36/45 15CMM, FDK56 16CMM, FDK71 24CMM.


Dimensions

All measurements in mm.


FDK22KXE6F, 28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F

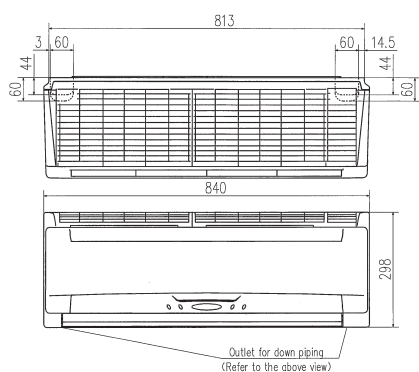


Note (1) The model name label is attached on the underside of the panel.

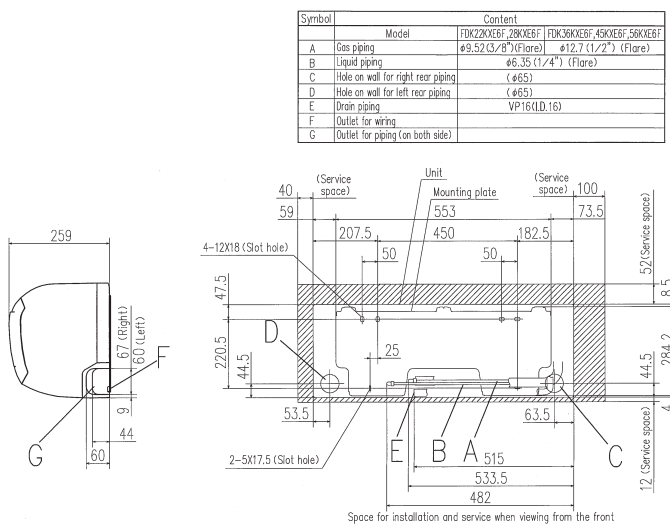

FDK71KXE6F

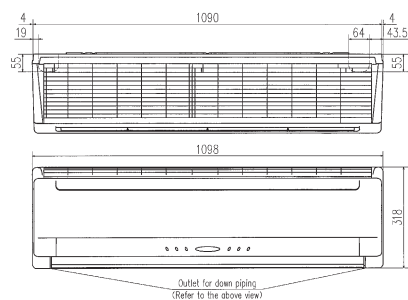

Note (1) The model name label is attached on the underside of the panel.

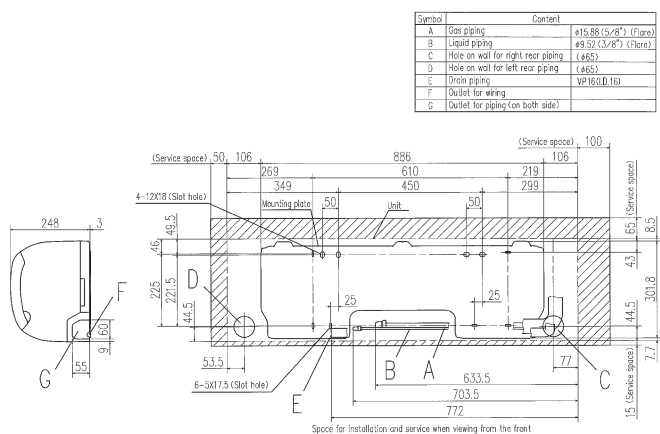



Ceiling Suspended FDE

Model No.

- FDE36KXE6F
- FDE45KXE6F
- FDE56KXE6F
- FDE71KXE6F
- FDE112KXE6F
- FDE140KXE6F



- Small
- Light-weight
- Quiet
- Sleek, intelligent design

Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless



RCN-E-E


Flap control system

Selection of flap position is possible. A flap can be set at different angles.

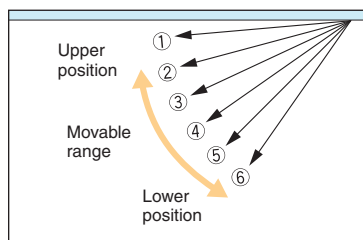


*RCH-E3 is not applicable to the Flap control system.

New Slim Design

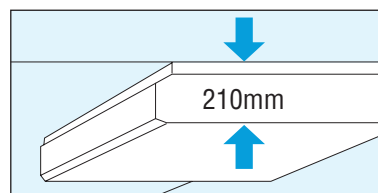

Slim and sleek design starting at just 28kgs in weight means quick, easy & neat installation.

Installation Workability

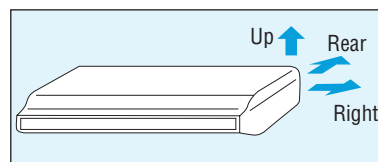

Refrigerant piping can be routed in three directions (rear, up, right) & drain piping in left or right directions, allowing free layout to meet installation conditions.

Specifications

Item	Model	FDE36KXE6F	FDE45KXE6F	FDE56KXE6F	FDE71KXE6F	FDE112KXE6F	FDE140KXE6F
Nominal cooling capacity	kW	3.6	4.5	5.6	7.1	11.2	14.0
Nominal heating capacity	kW	4.0	5.0	6.3	8.0	12.5	16.0
Power source		1 Phase 220-240V, 50Hz					
Power consumption	Cooling	0.05-0.06			0.10-0.11	0.14-0.16	0.16-0.18
	Heating	0.05-0.06			0.09-0.10	0.13-0.15	0.15-0.17
Sound pressure level ※	dB(A)	Hi:39 Me:38 Lo:36			Hi:41 Me:39 Lo:37	Hi:44 Me:41 Lo:39	Hi:46 Me:44 Lo:43
Exterior dimensions H x W x D	mm	210 x 1070 x 690			210 x 1320 x 690	250 x 1620 x 690	
Net weight	kg	28			37	49	
Air flow ※	CMM	Hi:10 Me:9 Lo:7			Hi:16 Me:14 Lo:12	Hi:26 Me:23 Lo:21	Hi:29 Me:26 Lo:23
Outside air intake		Not possible					
Air filter, Q'ty		Pocket Plastic net x2 (Washable)					
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-E-E					
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")			Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")		


1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDE36/45/56 46dB(A), FDE71 50dB(A), FDE112 46dB(A), FDE140 50dB(A). Air flow: FDE36/45/56 11CMM, FDE71 18CMM, FDE112 28CMM, FDE140 32CMM.


Dimensions

All measurements in mm.


FDE36KXE6F, 45KXE6F, 56KXE6F

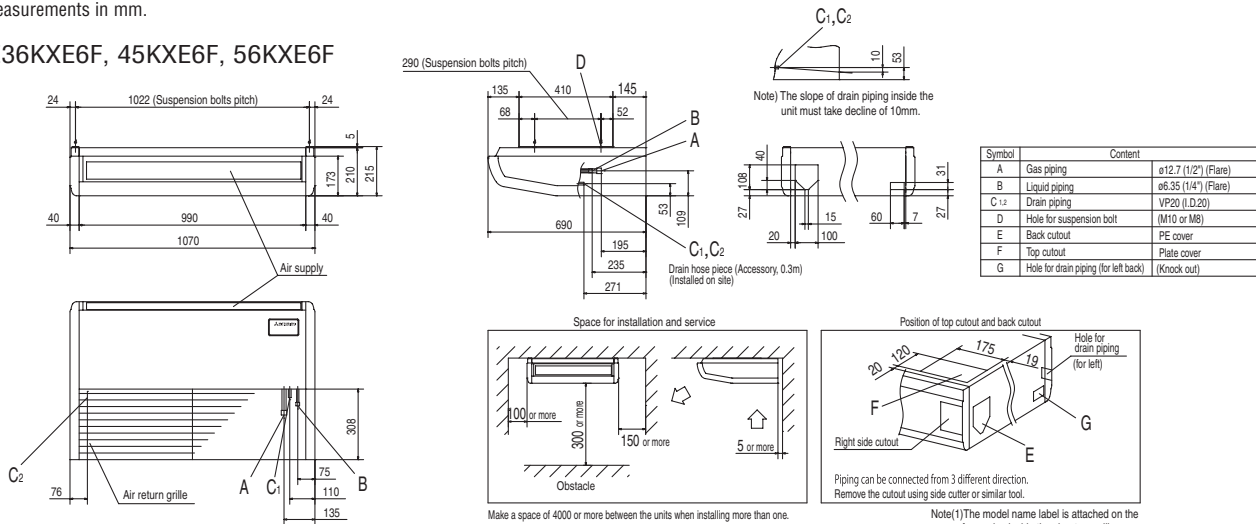

FDE71KXE6F

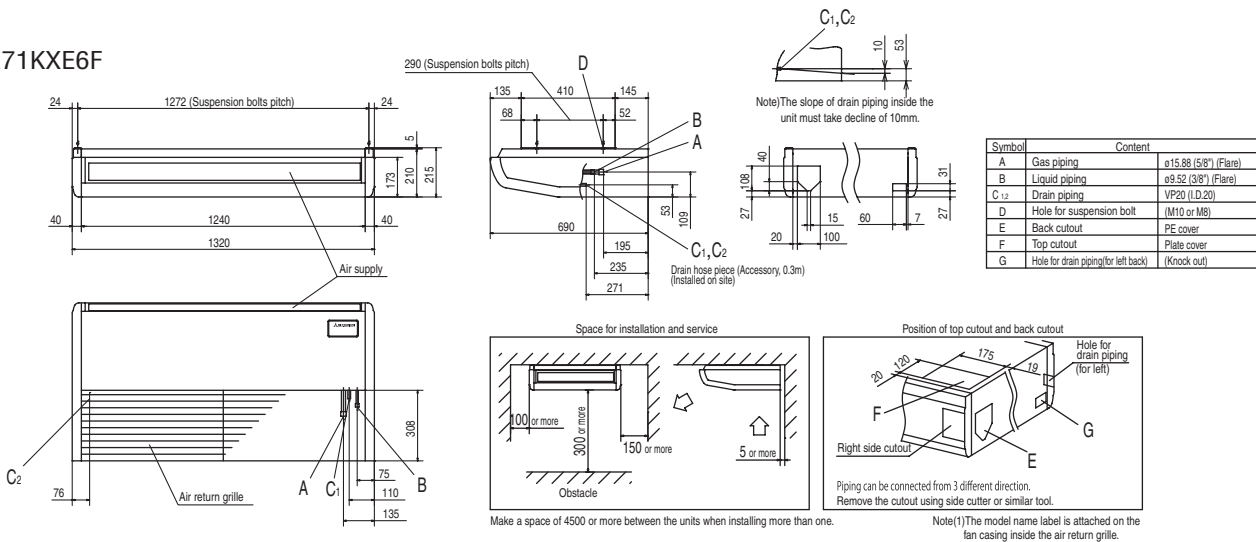

FDE112KXE6F, 140KXE6F

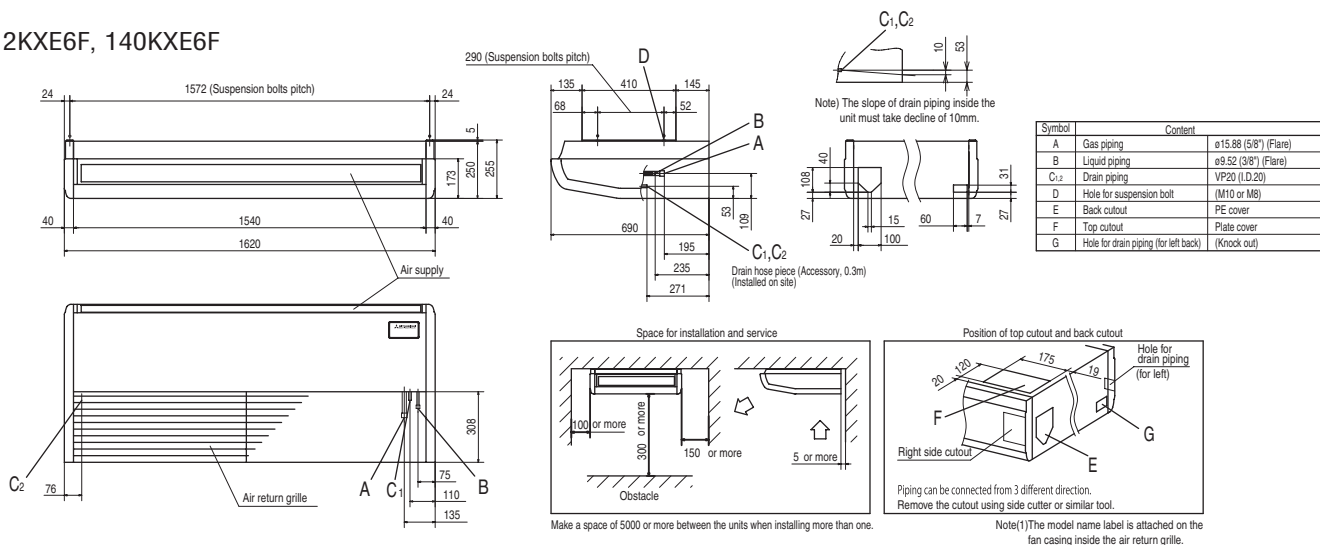



Floor Standing -2way- FDFW

Model No.
FDFW28KXE6F
FDFW45KXE6F
FDFW56KXE6F




Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3

Wireless



RCN-FW-E

Sophisticated Design

With classy semi flat front panel in chic white, the new series fit in various kinds of rooms and create relaxing atmosphere. Choice of wall hanging, floor standing or behind gallery installation is available.


Quiet Operation

Thanks to optimum balance of air outlet direction and sufficient air flow volume, the sound level has been minimized. The level of FDFW28KXE6F in the cooling lo mode is 30dB(A) only.

Flap control system


Selection of flap position is possible. A flap can be set at different angles.

*RCH-E3 is not applicable to the Flap control system.

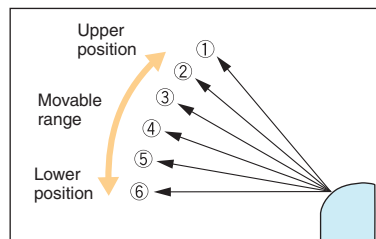

Convenient to use operation

Simultaneous lower and upper air outlets or upper outlet can be selected by air flow direction button. Further control can be arranged by a remote control.

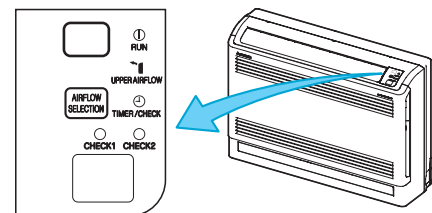

(In case of use of wireless remote control)





Specifications

Item	Model	FDFW28KXE6F	FDFW45KXE6F	FDFW56KXE6F
Nominal cooling capacity	kW	2.8	4.5	5.6
Nominal heating capacity	kW	3.2	5.0	6.3
Power source		1 Phase 220-240V, 50Hz		
Power consumption	Cooling	0.02-0.02	0.02-0.02	0.03-0.03
	Heating	0.02-0.02	0.02-0.02	0.03-0.03
Sound pressure level	dB(A)	Hi:36 Me:34 Lo:30	Hi:38 Me:36 Lo:33	Hi:44 Me:37 Lo:33
Exterior dimensions H x W x D	mm	600x860x238		
Net weight	kg	19	20	
Air flow (Standard)	CMM	Hi:9 Me:8 Lo:7		Hi:11 Me:9 Lo:8
Air filter, Q'ty		Polypropylene net x1 (Washable)		
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-FW-E		
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Dimensions

All measurements in mm.

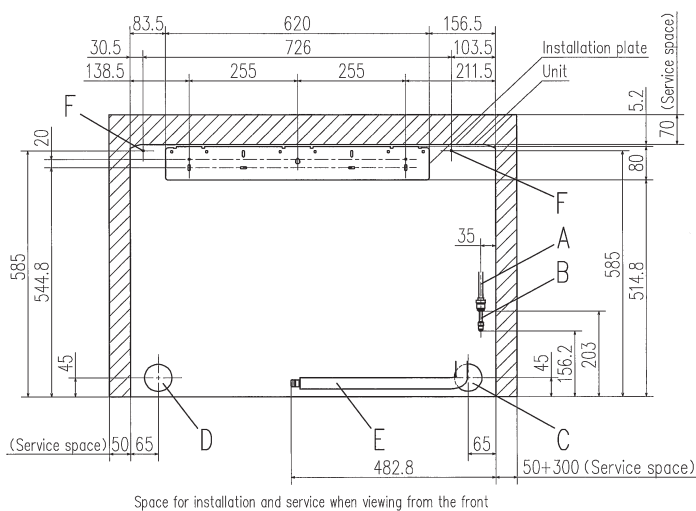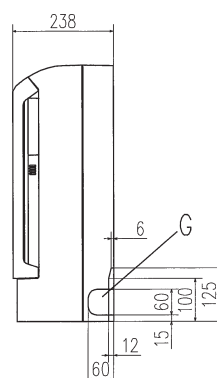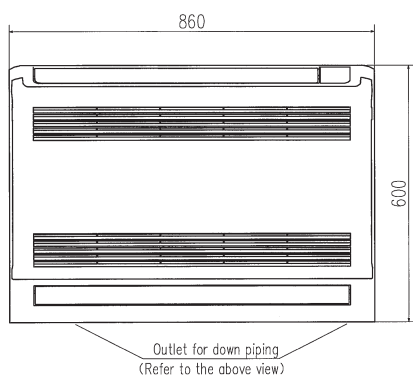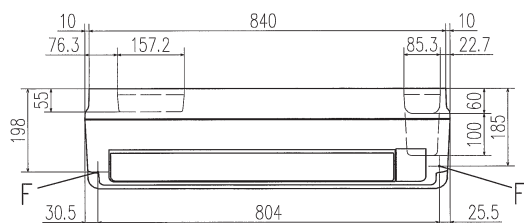


Symbol	Model	Content	
		FDW28KXE6F	FDW45KXE6F, 56KXE6F
A	Gas piping	φ9.52 (3/8") (Flare)	φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)	
C	Hole on wall for right rear piping	(φ65)	
D	Hole on wall for left rear piping	(φ65)	
E	Drain hose	VP16 (I.D.16)	
F	Screw point, fasten the indoor unit	φ5	
G	Outlet for piping (on both side)		

- Notes
- (1) The model name label is attached on the right side of the unit.
 - (2) In case of wall installation, leave the unit 150mm or less from the floor.



Floor Standing (with casing)
 FDFL
 Floor Standing (without casing)
 FDFU


Remote control (option)

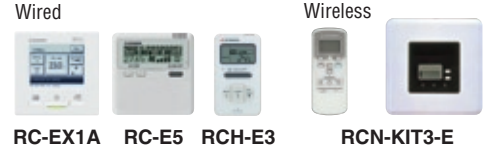

- Model No.**
 FDFL71KXE6F
 FDFU28KXE6F
 FDFU45KXE6F
 FDFU56KXE6F
 FDFU71KXE6F




FDFL

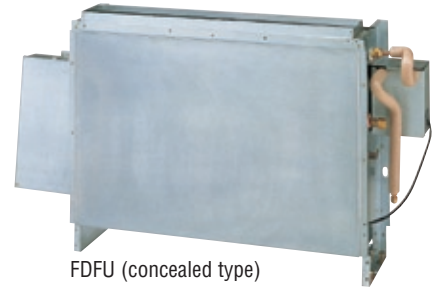

FDFU (concealed type)



Compact design at 630mm height

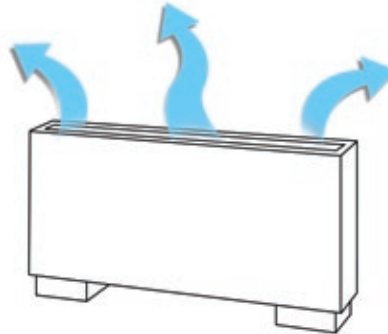

Wider airflow for optimum comfort

Specifications


Item	Model	FDFL71KXE6F	FDFU28KXE6F	FDFU45KXE6F	FDFU56KXE6F	FDFU71KXE6F
Nominal cooling capacity	kW	7.1	2.8	4.5	5.6	7.1
Nominal heating capacity	kW	8.0	3.2	5.0	6.3	8.0
Power source		1 Phase 220-240V, 50Hz				
Power consumption	Cooling	0.09-0.10			0.09-0.10	
	Heating	0.09-0.10			0.09-0.10	
Sound pressure level	dB(A)	Hi:43 Me:41 Lo:40	Hi:41 Me:38 Lo:36	Hi:43 Me:41 Lo:40		
Exterior dimensions H x W x D	mm	630x1481x225	630x1077x225			630x1362x225
Net weight	kg	40	25			32
Air flow (Standard)	CMM	Hi:18 Me:15 Lo:12	Hi:12 Me:11 Lo:10	Hi:14 Me:12 Lo:10		Hi:18 Me:15 Lo:12
Air filter, Q'ty		Polypropylene net x1 (Washable)				
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E				
Installation data Refrigerant piping size	mm(in)	Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Dimensions


All measurements in mm.

FDFL

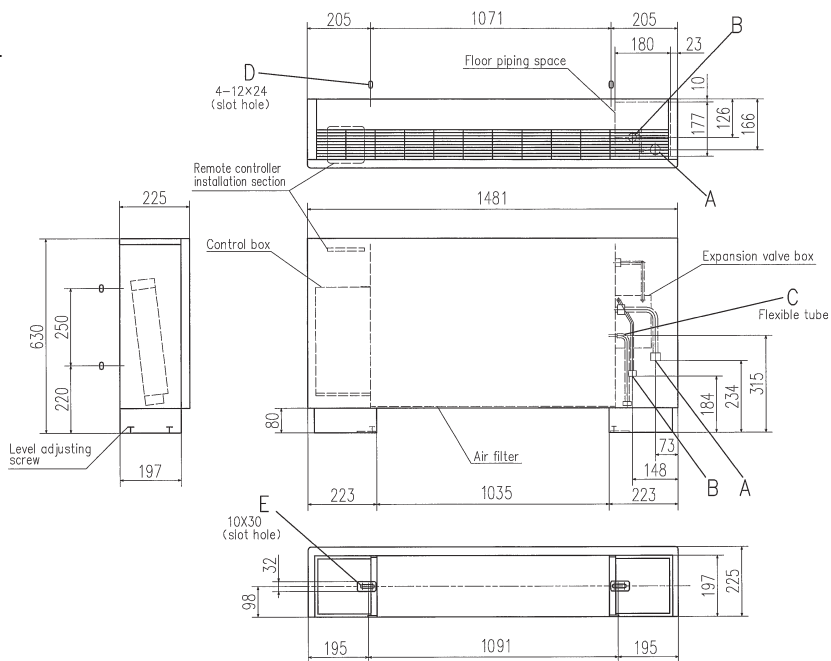


Symbol	Content	
	Model	
	Model	FDFL71KXE6F
A	Gas piping (Accessory)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ9.52 (3/8") (Flare)
C	Drain piping (Accessory)	PT20A female screw, 360mm
D	Slot hole for wall mounting	(M10)
E	Metal plate for floor mounting (Accessory)	(M8)

Note (1) The model name label is attached on the lid of the control box.




FDFU

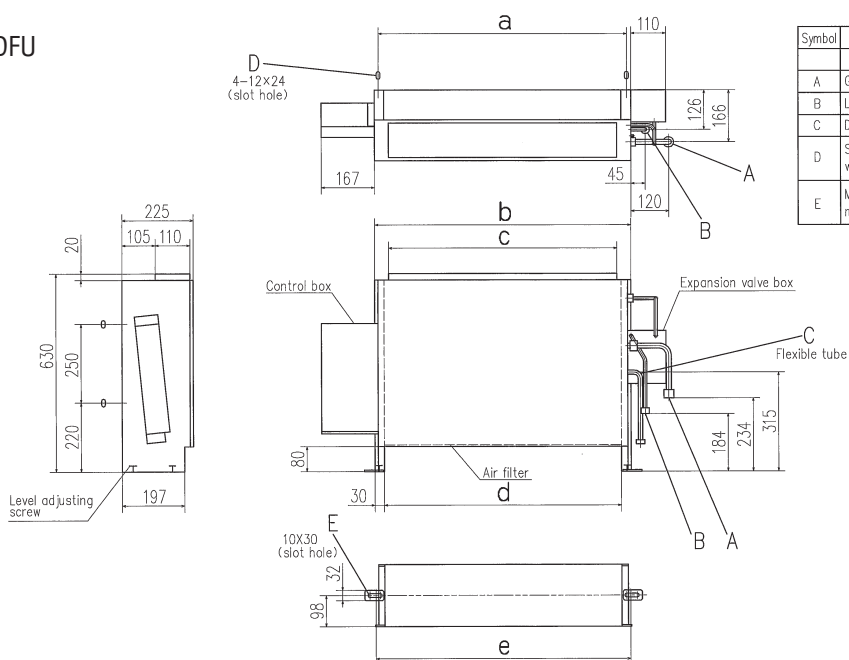

Symbol	Content			
	Model	FDFU28KXE6F	FDFU45KXE6F, 56KXE6F	FDFU71KXE6F
A	Gas piping (Accessory)	φ9.52 (3/8") (Flare)	φ12.7 (1/2") (Flare)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)		φ9.52 (3/8") (Flare)
C	Drain piping (Accessory)	PT20A female screw, 360mm		PT20A female screw, 360mm
D	Slot hole for wall mounting	(M10)		(M10)
E	Metal plate for floor mounting (Accessory)	(M8)		(M8)

Note (1) The model name label is attached on the lid of the control box.



Dimension Table

model	a	b	c	d	e
FDFU28KXE6F, 45KXE6F, 56KXE6F	786	810	722	750	806
FDFU71KXE6F	1071	1095	1007	1035	1091

Unit:mm



Outdoor Air Processing unit FDU-F


Model No.
 FDU500FKXE6F
 FDU850FKXE6F
 FDU1300FKXE6F
 FDU1800FKXE6F



Fan control kit (option)
(100~200Pa)
U-FCRB

Remote control (option)

Wired




Wireless



RCN-KIT3-E


Air conditioning and intake of outdoor air are in the same system

Outdoor Air processing unit can be connected in a KX6 system as one of indoor unit series and can create fresh and comfortable air supply together from our high advanced technology.

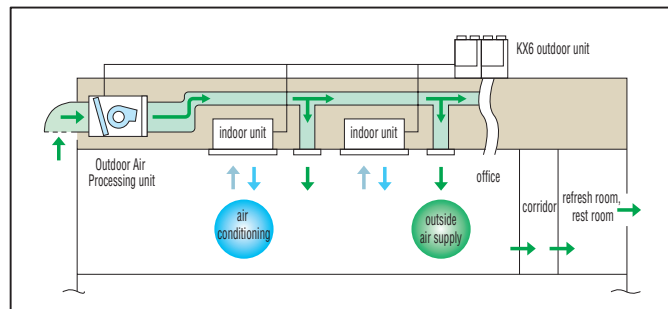

Compact design

Compact design at just 360mm in height, high static pressure of 200Pa and the industry's lowest noise level can meet various kind of installation location for office, refresh room, restroom and kitchen of restaurant etc.

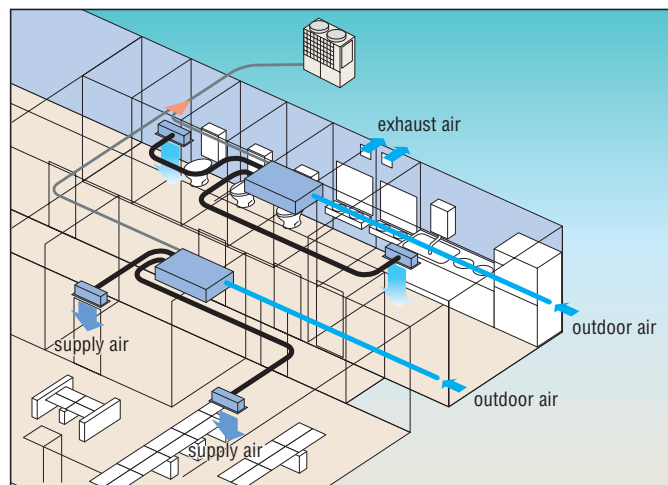


- (1) This unit is the specific unit for processing the outdoor air temperature closer to the room temperature. For conditioning the room temperature a dedicated air-conditioner is required additionally.
- (2) This unit monitors the outdoor air temperature and controls thermostat ON/OFF at the setting temperature by the remote controller, which indicates the outdoor air temperature for controlling thermostat ON/OFF. When thermostat is turned OFF, the operation is changed to the fan mode so that unprocessed outdoor air will be blown into the room directly. Therefore place the air outlet port or orient the air outlet direction not to blow air directly to persons in the room, especially in the small room such as a restroom and/or sanitary hot water supplying room.
- (3) It is strictly prohibited to monitor the room temperature by switching to the thermistor at remote controller side and/or the optional remote thermistor. Otherwise dew formation at air outlet port and/or dew dripping may occur during cooling operation due to the lower outdoor air temperature. Therefore keep the remote controller of this unit in place closer to the administrator so as not to be touched it freely by the end user.
- (4) Dehumidifying operation with this unit is prohibited.
- (5) When handing over this unit to the end user, make sure to explain sufficiently about the foregoing cautions, the installation place and usage of remote control for this unit and the location of the air outlet.

Connectivity with KX6 series

FDU-F series are connectable to 8~48HP KX6 outdoor units, not connectable to 4~6HP.
 8 ~ 48 HP : Yes , 4 ~ 6 HP : No

Combination with KX6 series


	case	Combination
A	In case OA processing units only are connected with KX6 outdoor units	The total capacity of FDU-F is 50~100% of outdoor capacity and max quantity of FDU-F is 2 units.
B	In case both of OA processing units and dedicated air-conditioner are connected with KX6 outdoor unit.	The total capacity of FDU-F and dedicated air-conditioners is 50~100% of outdoor capacity and max quantity of FDU-F should be below 30% of outdoor unit capacity.

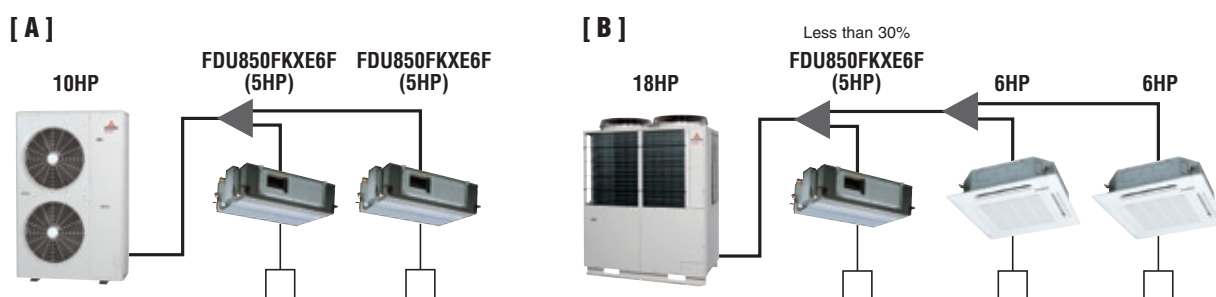


Concept (Difference between FDU-F and SAF)

SAF is the energy recovery ventilation unit which can recover heat energy from exhaust air to supply air and "has no air processing function, but FDU-F is air processing unit which can treat the supply air closer to room temperature by cooling or heating in connection with KX6 refrigerant system and exhaust air is discharged to outside of the room.

FDU-F OA Processing units

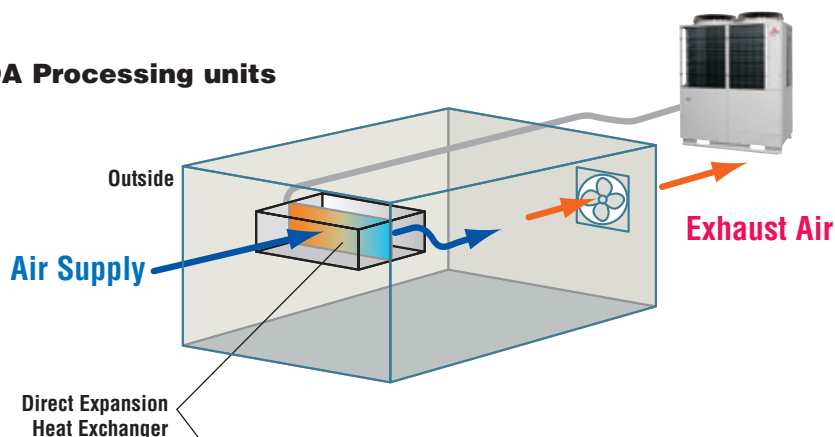

SAF

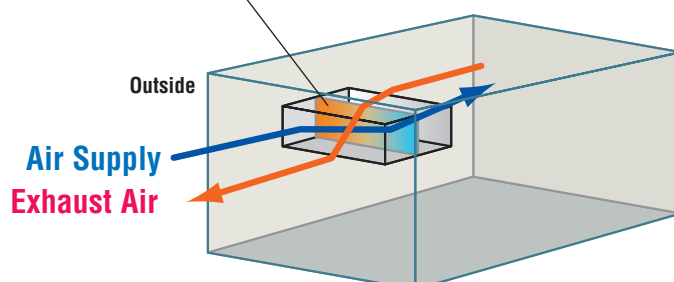



Specifications


Item	Model	FDU500FKXE6F	FDU850FKXE6F	FDU1300FKXE6F	FDU1800FKXE6F
Nominal cooling capacity	kW	9.0	14.0	22.4	28.0
Nominal heating capacity	kW	4.2	7.0	10.9	14.8
Power source		1 Phase 220-240V, 50Hz			
Power consumption	Cooling	0.11	0.16	0.27	0.31
	Heating	0.11	0.16	0.27	0.31
Sound pressure level	dB(A)	38	41	43	46
Exterior dimension HxWxD	mm	360x820x830		360x1570x830	
Net weight	kg	48	62	82	84
Air flow (Standard)	CMM	8.5	14	22	30
	CMH	510	840	1320	1800
External static pressure	Pa	200			
Air filter, Q'ty		Procure locally			
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E			
Installation data	mm	Liquid line:ø9.52(3/8")		Liquid line:ø9.52(3/8")	
	(in)	Gas line:ø15.88(5/8")		Gas line:ø19.05(3/4")	
Refrigerating piping size				Gas line:ø22.22(7/8")	

- The data are measured at 33°CDB 28°CWB (68%RH) during cooling and 0°CDB-2.9°CWB (50%RH) during heating (no frost). External static pressure of indoor unit with optional fan controlling kit "U-FCRB" is 100Pa.
- Temperature range of outdoor air must be 20-40°CDB (32°CWB) during cooling and -10-24°CDB during heating.
- Operation sound is measured in an anechoic room based on JIS standard. In case of actual room installation, it usually becomes higher than the displayed value due to the surrounding noise and echo.
- The total connection capacity of the other standard air conditioning units and the outdoor air processing units must be from 50% to 100% (the total includes the outdoor air processing unit). The connection capacity of the outdoor air processing unit must not exceed 30% of the capacity of the outdoor unit.
- Single outdoor air processing unit can be used alone. The connection capacity of the outdoor air processing unit must be from 50% to 100% of the total capacity of the outdoor unit.
- Single outdoor air processing unit can be used alone. Maximum number of outdoor air processing units that can be connected to the outdoor unit is 2units.
- Values of sound pressure level become increased 5dB(A), when external static pressure is 200Pa (factory setting).
- Values of air flow volume are those at external static pressure 200Pa (factory setting).


Dimensions

All measurements in mm.


FDU500FKXE6F

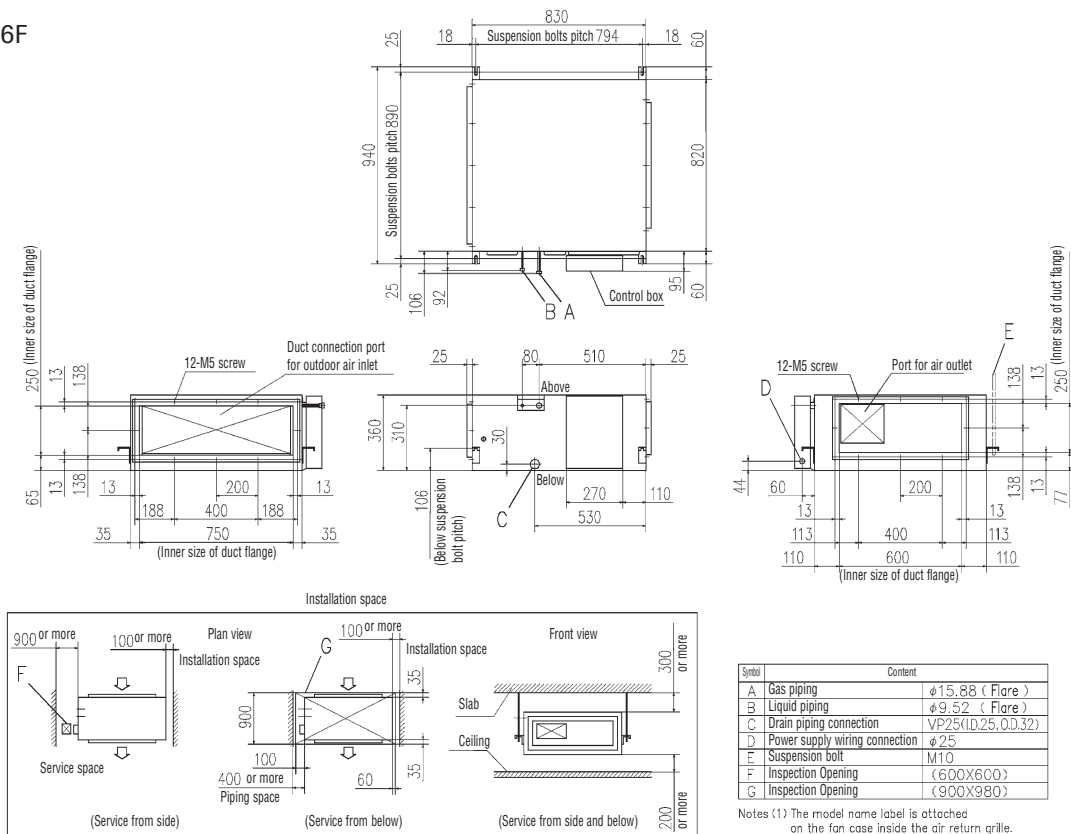

FDU850FKXE6F

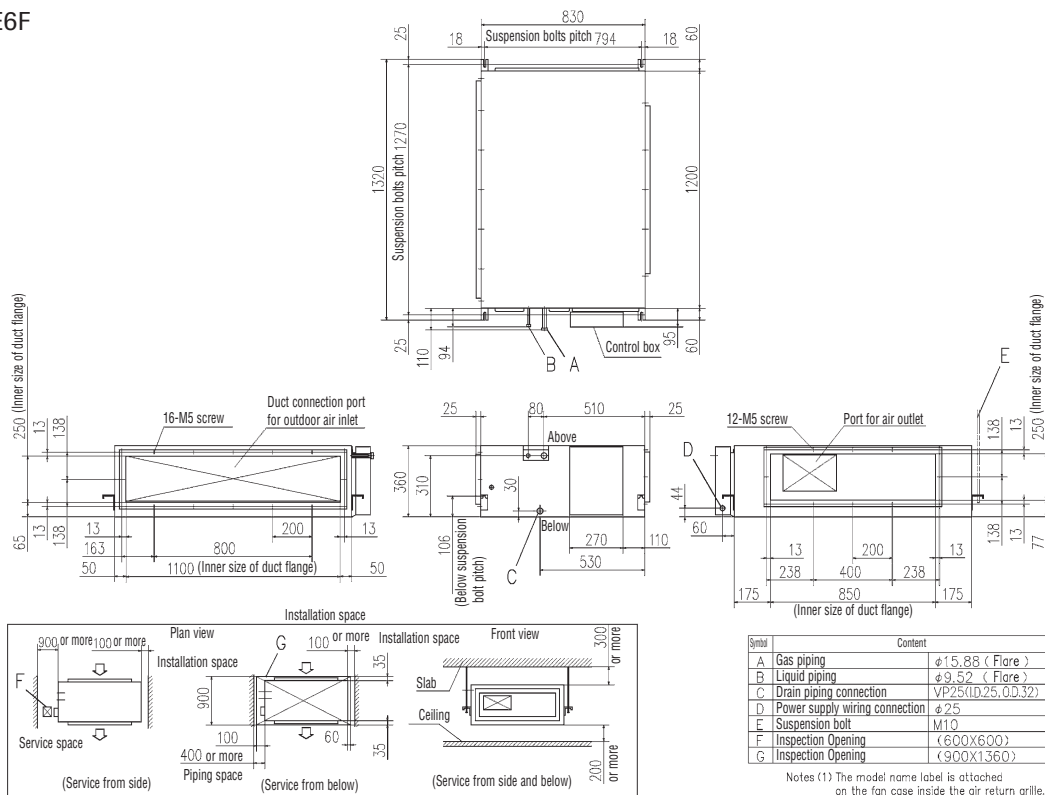

FDU1300FKXE6F, FDU1800FKXE6F

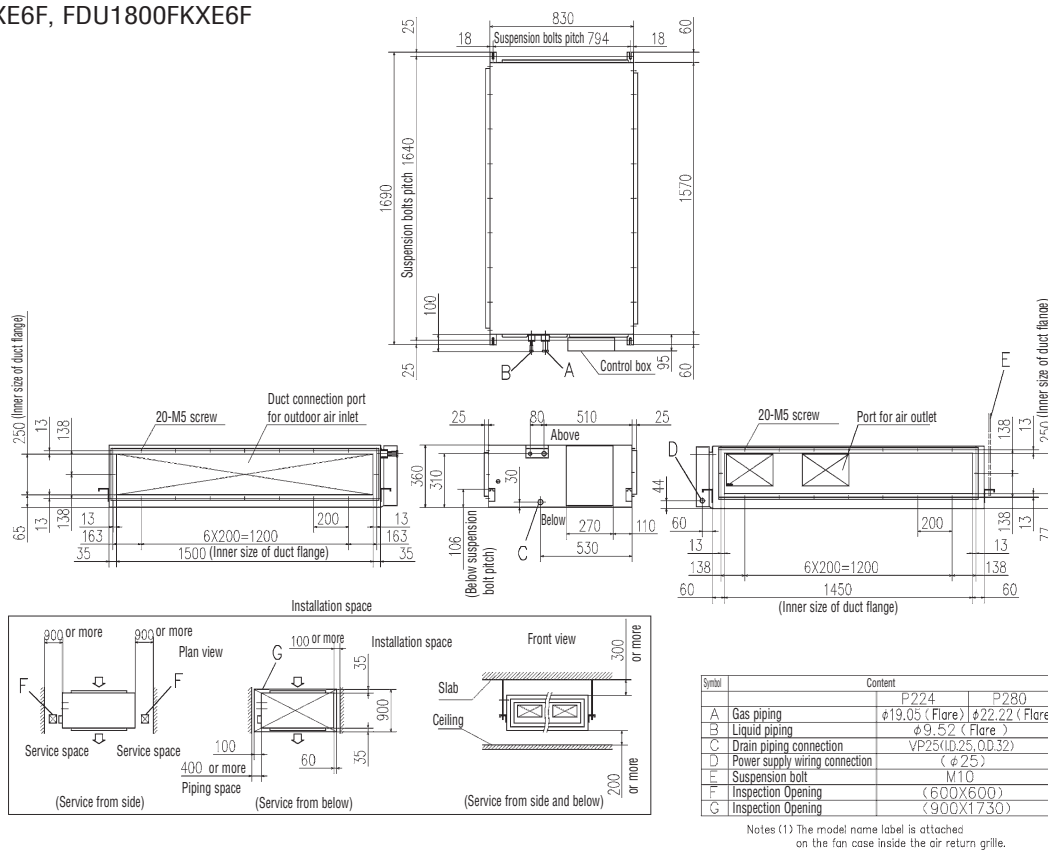



Fresh Air Ventilation and Heat Exchange unit SAF-E4

- Model No.**
 SAF250E4
 SAF350E4
 SAF500E4
 SAF800E4
 SAF1000E4




Re; Building Regulations Part L2

The Part L2 (April 2006) regulations limit the amount of electrical/gas power to be used to provide heating or cooling in commercial buildings. Therefore the building designer needs to select energy efficient heating/cooling equipment, and to minimise energy losses through ventilation systems.


The SAF recovers heat energy which would otherwise be exhausted to atmosphere, and uses this energy to warm the air entering the building. The reverse happens in warmer climates, where the exhausted cool air is used to partially cool the incoming air.

Capturing this waste energy, means the heating/cooling requirements of the building are reduced, so smaller size plant can be selected, savings can be made in long term energy consumption, and carbon emissions are reduced.


The inclusion of the SAF energy recovery ventilation units in the building design, will reduce the total amount of carbon emissions.




Structure (SAF1000E4)

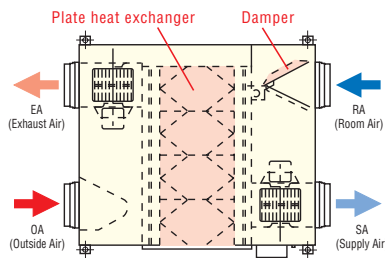

Principle of operation (simple ventilation)

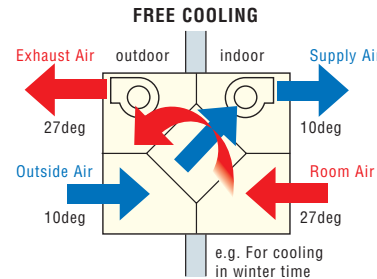

Principle of operation (heat exchanging)

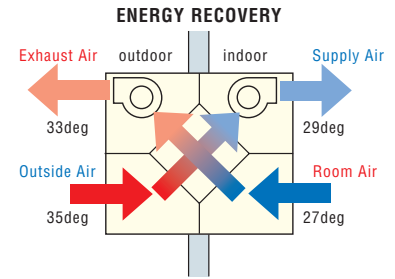


Specifications

Item	Model	SAF250E4	SAF350E4	SAF500E4	SAF800E4	SAF1000E4		
Power source		1 Phase 220-240V, 50Hz						
Exterior dimensions Height x Width x Depth	mm	270x882x599	270x882x804	270x962x904	388x1322x884	388x1322x1135		
Exterior appearance		Galvanised steel sheet						
Capacity	Power input	W	99-114	124-137	169-188	309-359	360-399	
		Running current	A	0.46-0.48	0.59-0.60	0.79-0.81	1.48-1.50	1.85-1.93
	UHi	Enthalpy exchange efficiency	Cooling	63	66	62	65	71
			Heating	70	69	67	71	71
		Temperature exchange efficiency	%	75				
	Hi	Enthalpy exchange efficiency	Cooling	63	66	62	65	71
			Heating	70	69	67	71	71
		Temperature exchange efficiency	%	75				
	Lo	Enthalpy exchange efficiency	Cooling	66	69	77	68	68
Heating			73	71	67	74	73	
Temperature exchange efficiency		%	77	77	75	76	76	
Motor & Q'ty	kW	0.02x2	0.044x2	0.062x2	0.117x2	0.137x2		
Air handling equipment Fan type & Q'ty		Sirocco fan x 2						
Air flow	UHi	250	350	500	800	1000		
	Hi	250	350	500	800	1000		
	Lo	170	280	370	650	810		
Available static pressure	UHi	90	95	105	140	90		
	Hi	80	65	70	110	55		
	Lo	37	42	38	70	35		
Remote control		Standard equipment						
Air filter	Out take intake air	Protection for element (Washable) PS400						
	Exhaust air							


Dimensions

All measurements in mm.


SAF250E4,350E4,500E4

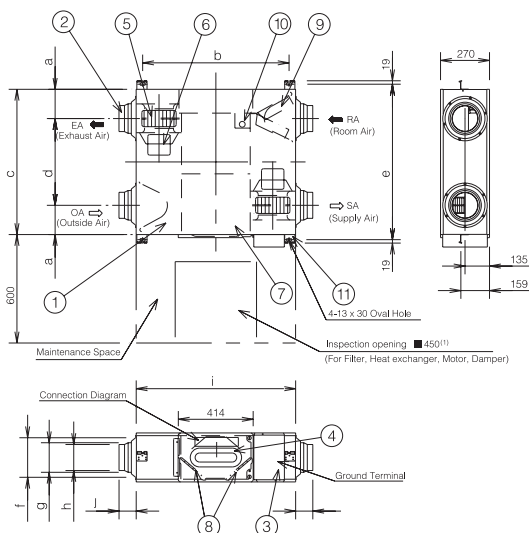


SAF800E4

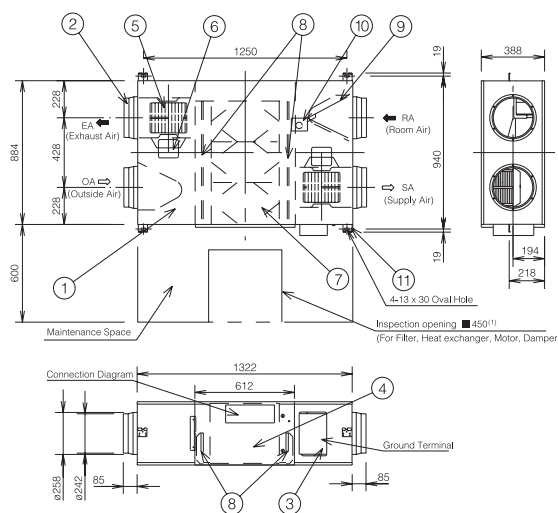

SAF1000E4

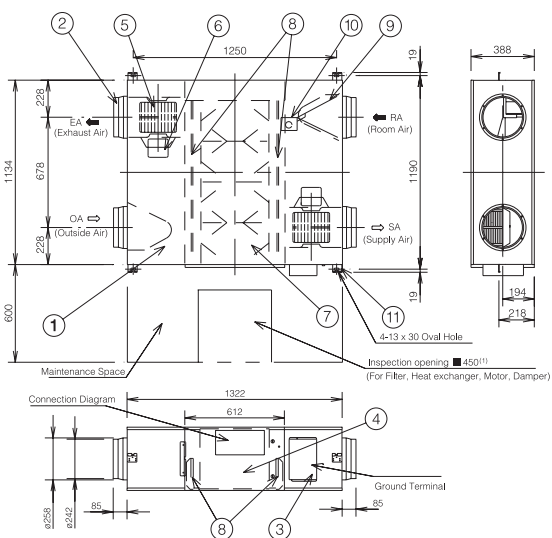

Installation reference

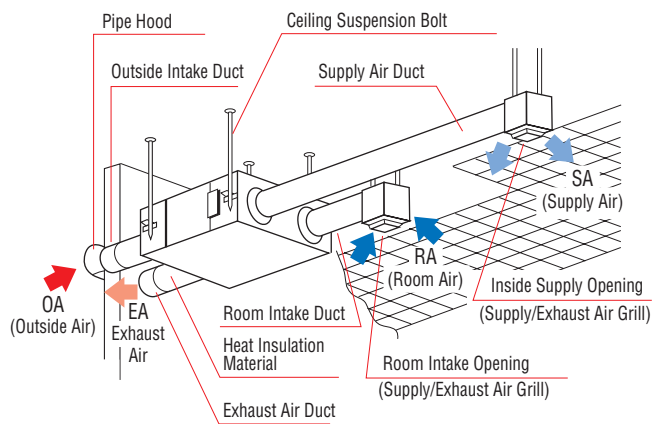

NO.	Name	Quantity	Material	Remarks
1	Frame	1	Zinc-plated steel	
2	Adaptor	4	ABS Resin	
3	Electrical Equipment Box	1		
4	Inspection Cover	1	Zinc-plated steel	
5	Fan	2	ABS Resin	
6	Motor	2		
7	Heat Exchange Element	2	Flame Retardant Paper + Plastic	Air to air Heat Exchanger
8	Filter	2	Non-woven Cloth	Collection Efficiency Gravimetric Method 82%
9	Damper	1		
10	Damper Motor	1		
11	Ceiling Suspension Fixture	4	Zinc-plated Steel	

Dimension table

Unit:mm

Model	a	b	c	d	e
SAF250E4	142	810	599	315	655
SAF350E4	162	810	804	480	860
SAF500E4	202	890	904	500	960

Model	f	g	h	i	j
SAF250E4	ø219	ø164	ø144	882	95
SAF350E4	ø219	ø164	ø144	882	95
SAF500E4	ø246	ø210	ø194	962	107

Note(1) An inspection port is needed for cleaning the heat exchanger and filter 1 or 2 times a year.



Fresh Air DX Assembly


Model No.

- SAF-DX250E6
- SAF-DX350E6
- SAF-DX500E6
- SAF-DX800E6
- SAF-DX1000E6



Drain up kit (option, built-in type)
(600mm)

DXA-DU-E



Remote control (option)

Wired




Wireless



RCN-KIT3-E

- SAF-DX is a heating or cooling coil incorporating MHI KX6 series controls. It can be used in combination with our SAF series of total heat exchanger.
- Combination of SAF-DX together with other KX6/KXR6 indoor units is possible. The capacity code index of each model is shown below and must be used when making the system selection. Total capacity code index must be within 100% of outdoor unit capacity code index.
- Remote control option is the same as with other KX6/KXR6 indoor units (see above). Connection to all superlink controls is also possible.
- Optional condensate lift mechanism is also available (600mm height).
- Return air temp. control or supply air temp. control can be selectable.

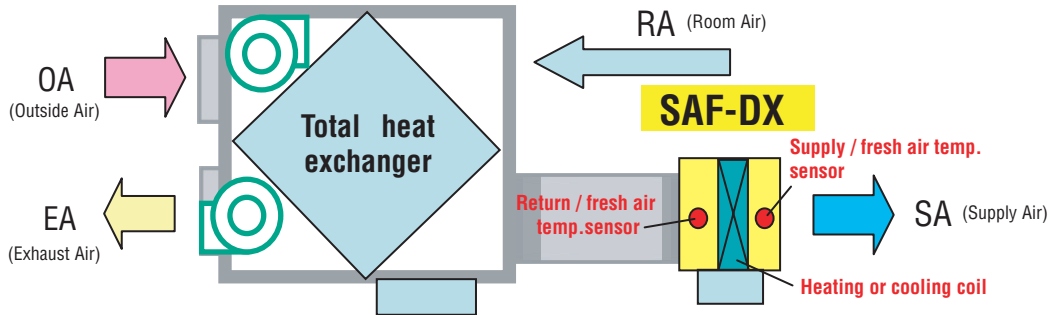

SAF-DX can provide heating or cooling to the fresh air supplied through a 3rd party air handling unit or total heat exchanger such as our SAF series.

Specifications

Item	Model	SAF-DX250E6	SAF-DX350E6	SAF-DX500E6	SAF-DX800E6	SAF-DX1000E6
Nominal cooling capacity *1	kW	2.0	2.8	3.6	5.6	6.3
Nominal heating capacity *2	kW	1.8	2.2	2.8	4.5	5.6
Capacity code		22	28	36	56	71
Power source		1 Phase 220-240V, 50Hz				
Power consumption	Cooling	7.2				
	Heating	7.2				
Running current	Cooling	0.05				
	Heating	0.05				
Exterior dimensions H x W x D	mm	315 x 452 x 422		315 x 537 x 422	315 x 682 x 422	315 x 822 x 422
Net weight	kg	12.3		13.6	16.1	18.4
Air flow (Standard)	CMH	250	350	500	800	1000
Internal resistance	Pa	38				
Remote control(option)		wired: RC-E5, RCH-E3 wireless: RCN-KIT3-E				
Installation data	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")	Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")	

(1) The data are measured at the following conditions.

Item	Return/fresh air temperature		Outdoor air temperature		Standards
	DB	WB	DB	WB	
Cooling *1	27°C	19°C	35°C	24°C	ISO-T1
Heating *2	20°C		7°C	6°C	

(2) This air-conditioner is manufactured and tested in conformity with ISO-T1 "UNITARY AIR-CONDITIONERS".





Dimensions

All measurements in mm.

SAF-DX250E6,350E6

Symbol	Content
A	Gas piping $\phi 9.52$ (3/8") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10





Space for installatin and service

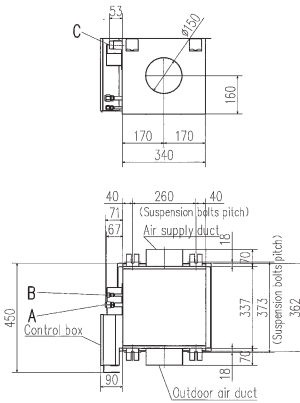

SAF-DX500E6

Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10





Space for installatin and service

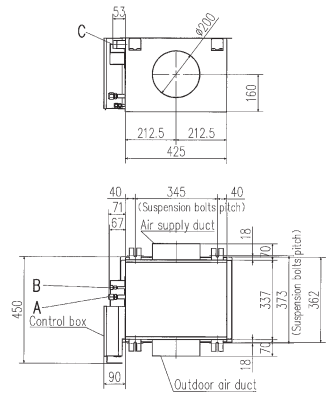

SAF-DX800E6

Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10





Space for installatin and service

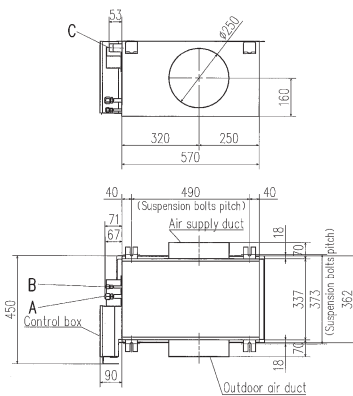

SAF-DX1000E6

Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10

Space for installatin and service

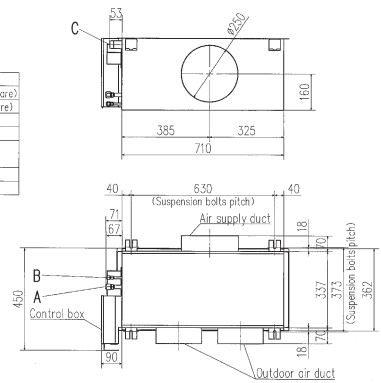



Control Systems

<Individual control>

Remote Control line up (except SAF)

	indoor unit	remote control		indoor unit	remote control	indoor unit	remote control	indoor unit	remote control
wired	all models	RC-EX1A	wireless	FDT	RCN-T-36W-E	FDT5	RCN-TS-E	FDE	RCN-E-E
		RC-E5		FDTC	RCN-TC-24W-ER	FDK22~56	RCN-K-E	FDFW	RCN-FW-E
		RCH-E3		FDTW	RCN-TW-E	FDK71	RCN-K71-E	others*	RCN-KIT3-E

*FDTQ, FDU, FDUM, FDUT, FDUH, FDU-F

Wired remote control with weekly timer (option)

RC-E5



The RC-E5 controller enables extensive access to service and maintenance technical data combined with easy to use functions and a clear LCD display.

Run hour meters to facilitate maintenance checking

RC-E5 stores operation data when an anomaly occurs and indicates the error on the LCD. It also displays cumulative operation hours of the air conditioner and compressor since commissioning.

Room temperature controlled by the remote control sensor


The temperature sensor is housed in the top section of the remote control unit. This arrangement has improved the sensitivity of the remote control unit's sensor, which permits more finely controlled air conditioning.



Weekly timer function as standard

RC-E5 provides (as a standard feature) a weekly timer, which allows one-week operation schedules to be registered. A user can specify up to four times a day to start/stop the air conditioner. (Temperature setting is also possible with the timer).

Timer operation



Changeable set temperature ranges

RC-E5 allows the upper and lower limits of a set temperature range to be specified separately. By adjusting a set temperature range, you can ensure energy saving air conditioning by avoiding excessive cooling or heating.

Changeable range	
Upper limit	20~30°C(effective for heating operation)
Lower limit	18~26°C(effective for non-heating operation)

Simple remote control (option)

RCH-E3 (wired)



Considering specialized usage in hotel rooms, control buttons are limited only to minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

Up to 16 units

It can control up to 16 units individually, with pressing the AIR CON No. button.

AUTO restart

This function allows starting the air conditioner automatically when power supply is restored after power failure or by turning on the power switch.

*RCH-E3 is not applicable to the Individual flap control system and the Flap control system.
*When RCH-E3 is used, the fan speed setting can only be set to 3 speed settings (Hi-Me-Lo).

Thermistor (option)

SC-THB-E3

In case sensor in the indoor units or the remote control sensor can not sense the room temperature correctly, or individual remote control in each room is not required but only sensor is required (as when center control system is in place), install SC-THB-E3 at proper place in the rooms.



Wireless remote control (option)

For wireless control simply insert the infra-red receiver kit on a corner of the panel

RCN-T-36W-E,
RCN-TC-24W-ER



RCN-TW-E



RCN-TS-E



RCN-K-E,
RCN-K71-E



RCN-E-E



RCN-FW-E



RCN-KIT3-E




*The wireless remote control is not applicable to the Individual flap control system and the Flap control system.
*When the wireless remote control is used, the fan speed setting can only be set to 3 speed settings (Hi-Me-Lo).

<Control System> SUPERLINK-II

MHI has now combined simplicity of installation with our highly sophisticated Superlink-II control system, to offer building owners and occupiers a comprehensive control and management system, while providing complete commissioning and service maintenance assistance for installers and service engineers. The Superlink-II network utilises two wire, non-polar cable - for further details of wiring.

Superlink-II is an advanced high speed data transmission system that can connect up to 128 indoor units and 32 outdoor units as a network. MHI offers a wide range of control options for the Superlink-II network to suit any application large or small, as well as connection to new or existing building management systems. Individual MHI split systems can also be integrated on to the Superlink-II network using SC-ADNA-E.

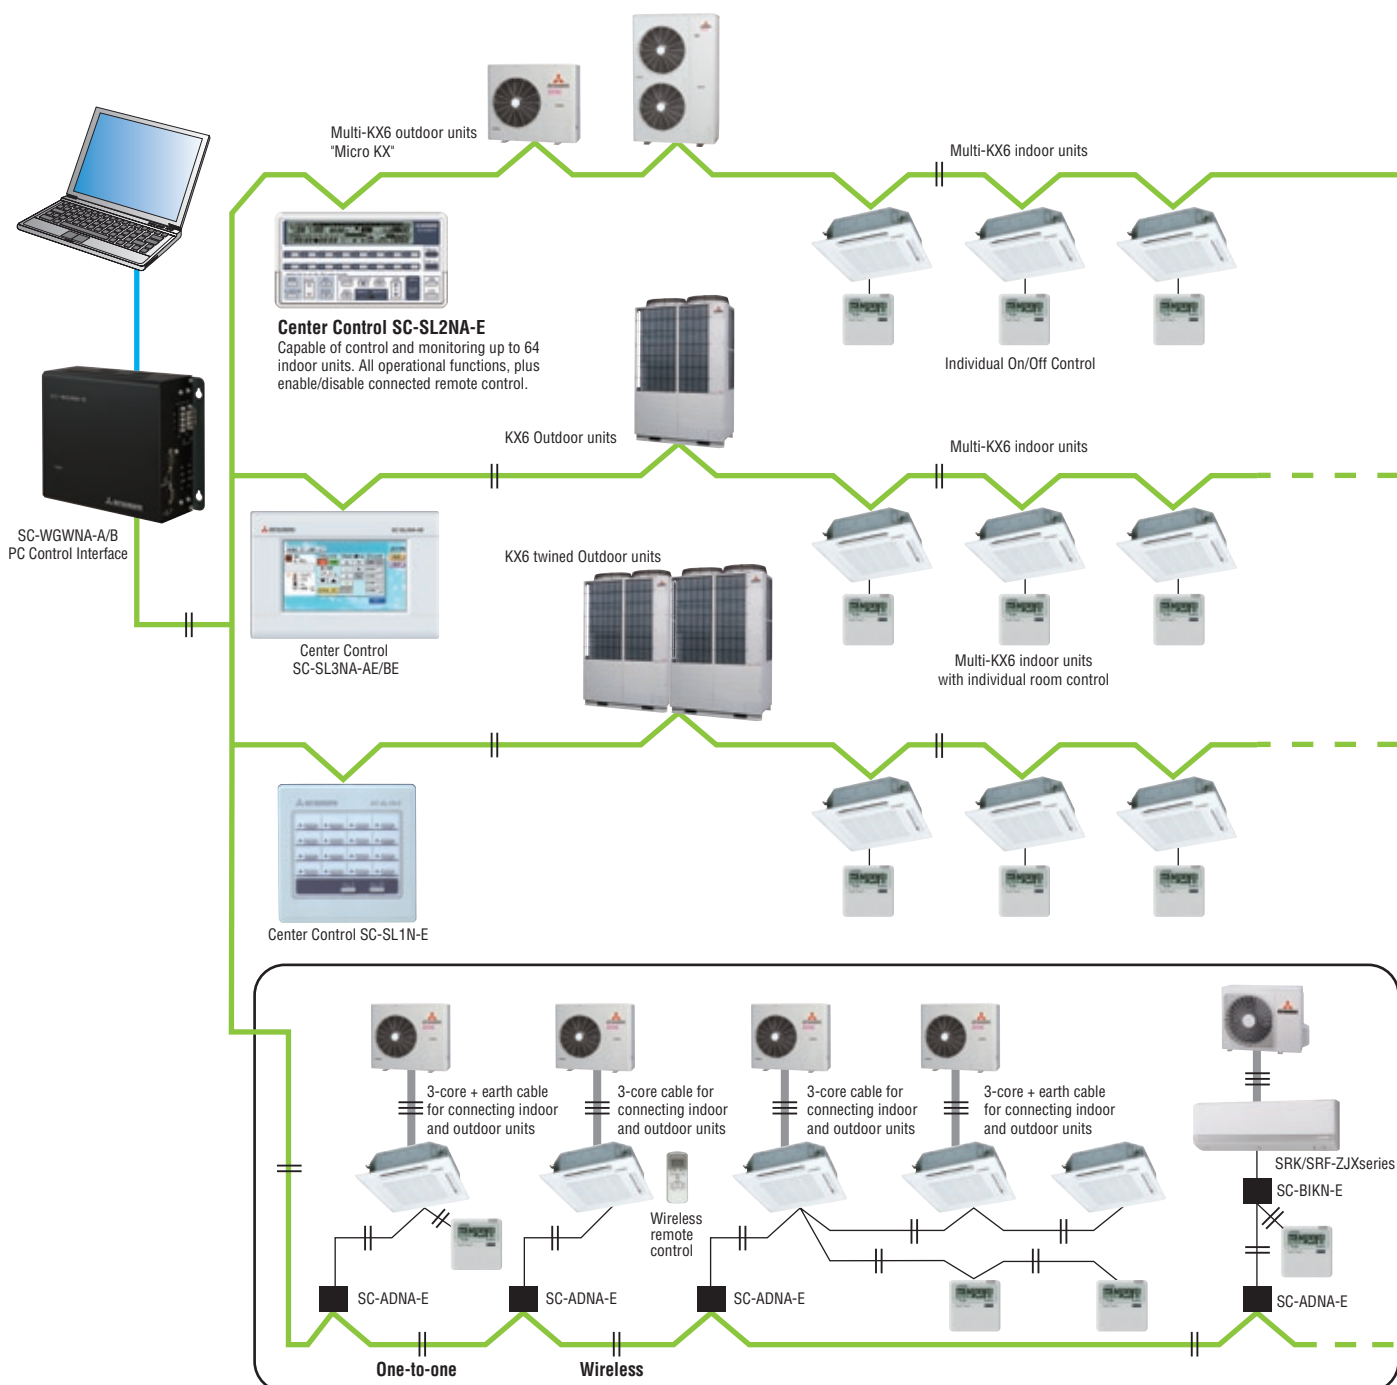




<Central Control>

SC-SL1N-E

Start/stop control of up to 16 indoor units either individually or collectively.
Simple centralised control.




1. The SC-SL1N-E is connected to the Superlink-II network via 2-core, non-polar wires ('AB' connection).
2. It will monitor and control the start/stop function of up to 16 units, with the sixteen operation button.
3. The unit or group numbers in operation or in need of service are displayed with an LED.
4. Collective start/stop is also available through the simultaneous on/off button.
5. Up to 12 SC-SL1N-E units can be connected to a Superlink-II network (consisting of up to 128 indoor units).
6. If a power failure occurs, the SC-SL1N-E will resume the operation of the system according to a stored operation condition, once power is restored.

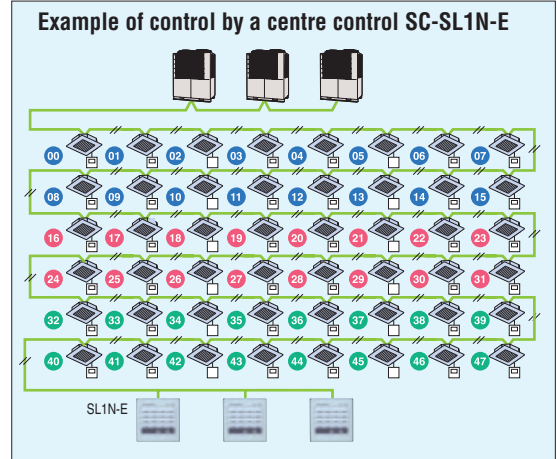


More than one unit (up to 16) can be controlled for individual or collective start/stop operation and indication of unit statuses such as in operation or in need of service.
• Outer dimensions: H120 x W120 x D15+62* mm.
62* is the measurement including the part contained in a recess.

SC-SL2NA-E

Central control of up to 64 indoor units including weekly timer function as standard.



1. The SC-SL2NA-E is connected to the Superlink-II network via 2-core, non-polar wires ('AB' connection).
2. It will monitor and control the start/stop function of up to 16 units, or 16 groups of units, with the sixteen operation buttons.
3. It also monitors and controls the following functions for individual units, groups of units or the complete network: operation mode, set point temperature, return air temperature, louvre position, error code. Air flow and center lock function.
4. The unit or group numbers in operation or in need of service are displayed with an LCD.
5. Collective start/stop is also available through the simultaneous on/off button.
6. If a power failure occurs, the SC-SL2NA-E will resume the operation of the system according to a stored operation condition, once power is restored.
7. The SC-SL2NA-E can be connected to an external timer to facilitate timed on/off cycles.
8. The number of units connected to one network are detailed on the table below.

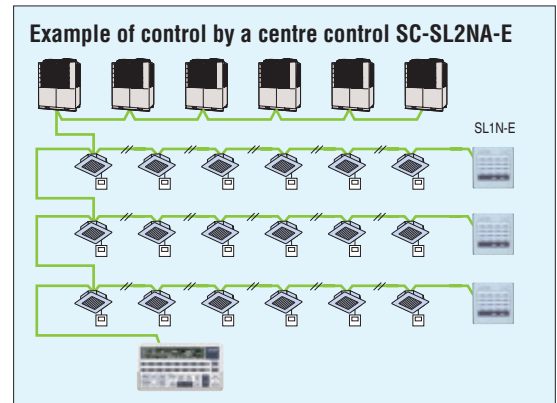

An SC-SL2NA-E performs the start/stop control, monitoring and mode setting of up to 64 units. It is a high quality air conditioner control system that allows up to 64 indoor units to be freely grouped into 1 to 16 groups. It allows not only the start/stop control but also the monitoring, display of operation statuses such as in operation or in need of service and mode setting such as switching of operation modes of connected units collectively, by group or individually.
• Outer dimensions: H120 x W215 x D25+35* mm.
35* is the measurement including the part contained in a recess.

Combination of Center Control and BMS interface unit

	SC-SL1N-E	SC-SL2NA-E	SC-SL3NA-AE/BE	SC-WGWNA-A/B	SC-BGWNA-A/B	SC-LGWNA-A
SC-SL1N-E	Yes(*1)	Yes(*1)	Yes(*1)	Yes(*2)	Yes(*2)	Yes(*2)
SC-SL2NA-E	Yes(*1)	Yes(*1)	Yes(*1)	Yes(*2)	Yes(*2)	Yes(*2)
SC-SL3NA-AE/BE	Yes(*1)	Yes(*1)	Yes(*1)	Yes(*2)	Yes(*2)	Yes(*2)
SC-WGWNA-A/B	Yes(*2)	Yes(*2)	Yes(*2)	No	No	No
SC-BGWNA-A/B	Yes(*2)	Yes(*2)	Yes(*2)	No	No	No
SC-LGWNA-A	Yes(*2)	Yes(*2)	Yes(*2)	No	No	No

(*1) Number of units in combination of SC-SL1N-E, SC-SL2NA-E and SC-SL3NA-AE/BE

(*2) Number of units in combination of SC-WGWNA-A/B, SC-BGWNA-A/B, SC-LGWNA-A, SC-SL3NA-AE/BE, SC-SL2NA-E and SC-SL1N-E

	Connectable number of controls in one superlink-II network									
SC-SL3NA-AE/BE	0				1			2		
SC-SL2NA-E	0	1-2	3-4	5-8	0-2	3-4	5-8	0-2	3-4	5-8
SC-SL1N-E	12	8	4	0	0	8	4	0	8	4

Regarding previous Superlink, refer to Technical Manual '06 SC-T-111, '08 SC-T-119.

	Connectable number of controls in one superlink-II network		
SC-WGWNA-A/B or SC-BGWNA-A/B or SC-LGWNA-A	SC-SL1N-E	SC-SL2NA-E	SC-SL3NA-AE/BE
1	0-4	0-1	0-1

Regarding previous Superlink, refer to Technical Manual '06 SC-T-111, '08 SC-T-119.


SC-SL3NA-AE/BE

MHI introduces the full colour touch screen central control SC-SL3NA-AE/BE, with 7 inch interactive LCD display. Offers control, monitoring, scheduling and service/maintenance functions for up to 128 indoor units.

Indoor units can be controlled, scheduled, monitored and interrogated either individually, as groups or as blocks of groups with the following functions:



Control	Monitoring	Scheduling	Administration/Service
Run/Stop	Operating state	Yearly schedule	Block definition
Mode (cool/heat/fan)	Mode	Today's schedule	Group definition
Set temperature	Set temperature	Special day schedule	Unit definition
Operation permitted/prohibited	Room temperature		Time and date setting
Fan speeds	Operation enabled		Alarm history
Air direction	Fan speed		Energy consumption calculation period
Filter reset	Air direction		Energy consumption cumulative operation time
Filter sign			
Maintenance (1, 2 or back-up)			Demand control
Breakdown			Emergency stop
			Power failure recovery control



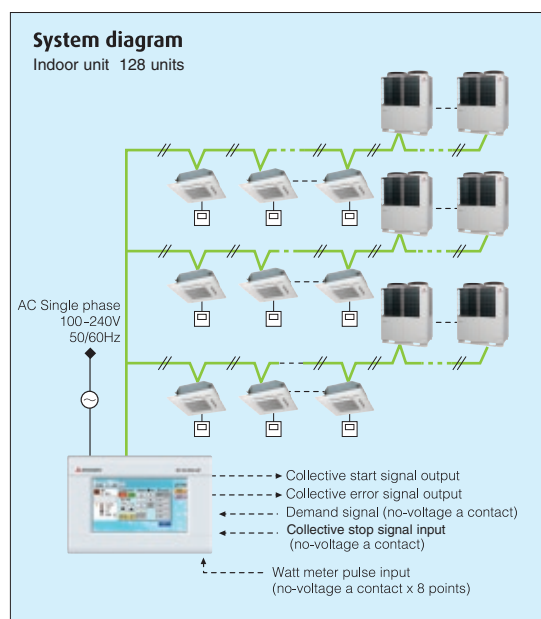


SC-GIFN-E Interface kit **NEW**

- Applicable products
Ventilation fan, Air purifier
- By using SC-GIFN-E together with central control such as SC-SL1N-E, SC-SL2NA-E and SC-SL3NA-AE/BE, you can start-stop, operate & monitor the operation of applicable products.

SLA3R-BX Control Box (option)

In case SC-SL3NA-AE/BE is fixed in the wall, use SLA3R-BX as optional parts.

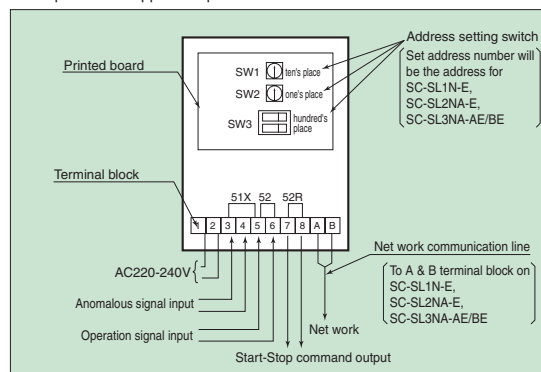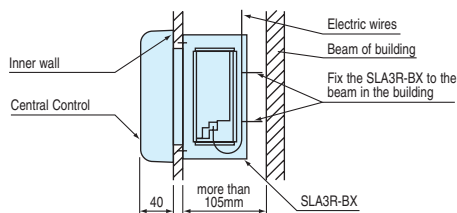

Electric power calculation function:

(for SC-SL3NA-BE only)

SC-SL3NA-BE gives outputs as "electric power consumption kW data -each indoor unit, each group, each SUPERLINK-II system and each power pulse system-" and uses USB memory.

The data can be edited by using the software that comes with the unit.



	SC-SL3NA-BE
Method of data saving	USB
Calculation software	Standard
Air-conditioner power proportional distribution pulse input	8 systems
Connecting indoor units number (Maximum)	128

Item	Model	SC-SL3NA-AE/SC-SL3NA-BE
Ambient temperature during use		0 ~ 40°C
Power supply		1 Phase 100-240V 50/60Hz
Power consumption		18W
External dimensions (Height x Width x Depth)		162mm x 240mm x 108mm
Net weight		2.0kg
Number of connectable units (indoor units)		up to 128 units
LCD touch panel		Colour LCD, 7 inches wide
Inputs	SL (Superlink) signal inputs	3 systems
	Gas, Power pulse input*	8-point pulse width 100ms or more
	Emergency stop signal input*	1 point non-voltage a contact input continuous input (closed, forced stop)
	Demand signal input*	1 point non-voltage a contact input continuous input (closed, demand control)
Outputs	Simultaneous operation output	1 point maximum rated current 40mA, 24 V During full stop; Open. If even one unit is operating; Closed
	Simultaneous error output	1 point maximum rated current 40mA, 24 V Normal; closed. If even one unit is abnormal; Open

* The receiving side power supply is DC 12V (10mA).
The air conditioning charges calculations of this unit are based on OIML, the international standard.
* In case embodying in a wall, please be sure to special box SLA3R-BX (option).





<PC windows central control> SC-WGWNB-A/SC-WGWNB-B (Web gateway)

(SC-WGWNB-B is with electric power calculation function) Production by order

Control and monitoring of up to 96 cells (some cells can have two or more indoor units and total number of indoor units can be up to 128 units) centralised to a network PC using the Superlink-II web gateway. Simple installation is assured with no special software requirements, operation is via Internet Explorer. A low power embedded CPU and compact flash ROM ensure a large storage capacity with high reliability (no moving parts such as a PC fan, etc). An IP address filter function combined with three-level user authentication check also ensures security.



Additional engineering service cost etc. is required. Please consult your dealer when using this central control.

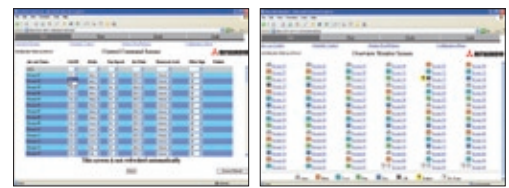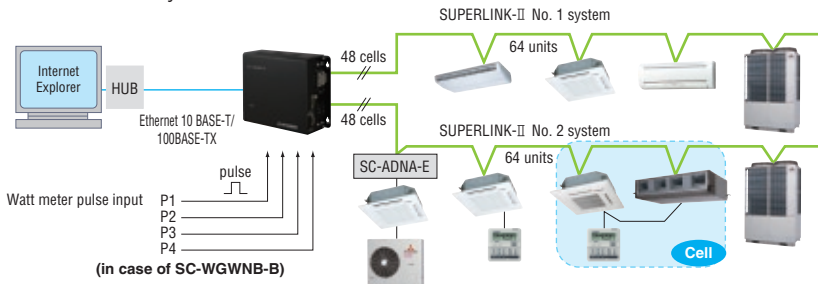

PC requirements: Windows XP or Windows Vista or Windows 7.
Monitor resolution 1024 x 768.
Web browser requirements: Internet Explorer 6.0 or 7.0.


<BMS interface unit> SC-BGWNA-A/A1, SC-BGWNA-B (BACnet gateway) Production by order

(SC-BGWNA-A1 is with BLT Certification, SC-BGWNA-B is with electric power calculation function)

SC-BGWNA-A/B is an interface device that converts MHI's Superlink-II communication data to BACnet code. Control and monitoring functions of the a/c system for up to 96 cells (some cells can have two or more indoor units and total number of indoor units can be up to 128 units) can be integrated to a central control point via the building management system network.



Additional engineering service cost etc. is required. In case of SC-BGWNA-B, communication test by qualified person regarding electric cost calculation function is required before commissioning. Please consult your dealer when using this gateway.

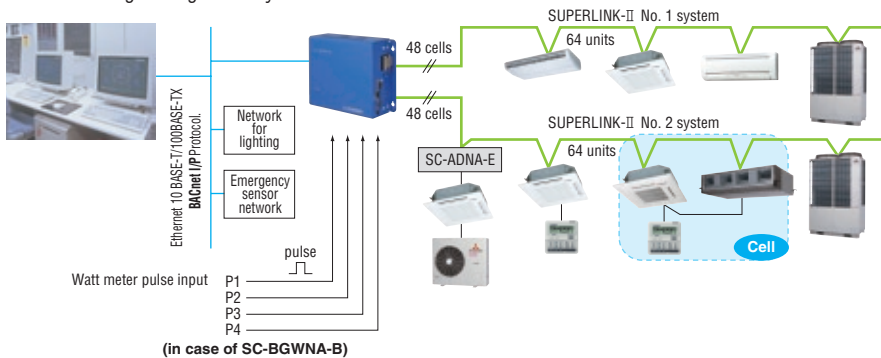


SC-LGWNA-A (LonWorks gateway) Production by order

SC-LGWNA-A is an interface device that converts MHI's Superlink-II communication data to LonWorks code. Control and monitoring functions of the a/c system for up to 96 indoor units can be integrated to a central control point via the building management system network.



Additional engineering service cost etc. is required. Please consult your dealer when using this gateway.

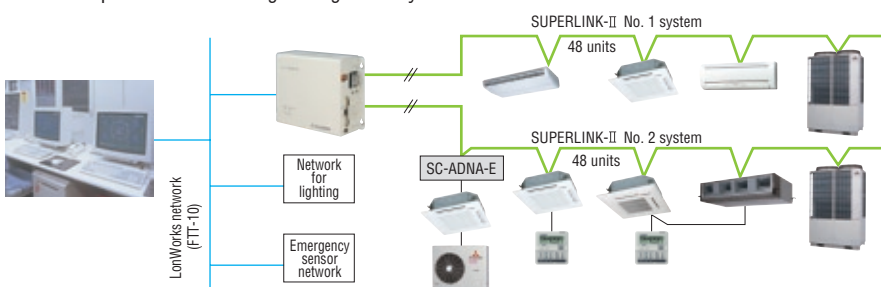

KX6 Service/maintenance and monitoring


The design of the outdoor units separates the air flow compartment from the mechanical compartment, allowing easy access to serviceable parts by simply removing the panel.

This design also means that the base plate of the air flow compartment acts as a drain tray connected to a drain pipe that runs through the mechanical compartment, so a simple connection of a drain hose to the base of the unit is all that is required, no need for a separate drain tray to be installed.

Service maintenance and trouble shooting tasks can be carried out easily via the wired remote controller, as well as a cooling test operation to assist commissioning.

The outdoor unit control box is also equipped with a switch to invoke a 'test-run' mode. This function can be used to help detect any installation errors, indoor/outdoor unit matching errors, EEV and valve operation. A 'pump-down' switch on the PCB allows refrigerant to be recovered with the compressor protected.

All outdoor unit PCBs are also equipped with a 7-segment digital display for detailed operation history and fault finding. Operation data is stored for the 30 minute period preceding a fault occurring and details are displayed on the 7-segment reading.

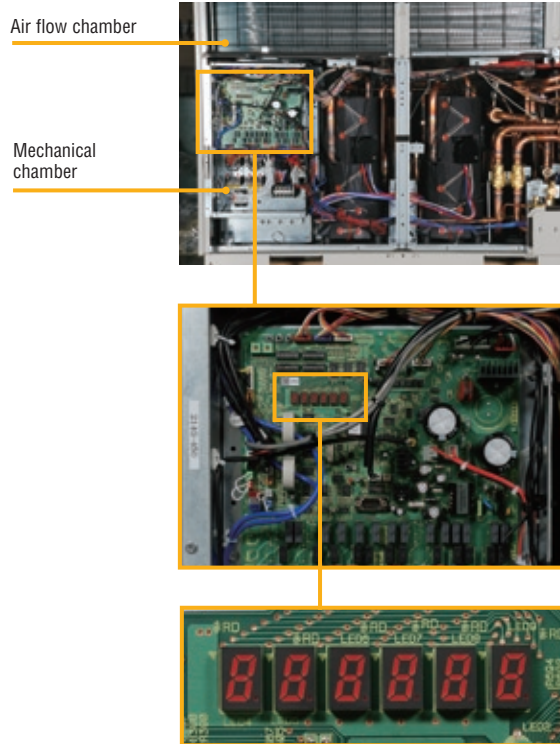

Outdoor unit PCB 7-segment display


Automatically produced test-run report

KX6 series operation data sheet (Outdoor unit)


Customer name: trading company | Test run date: Aug. 7, 2003 | Test run operator: Taro Mitsubishi | Delivery date: Jul. 25, 2003 | Weather: cloudy

Time	Room Temp.	Room Humidity	Room Air Flow	Outdoor Air Temp.	Outdoor Humidity	Outdoor Air Flow	Outdoor Pressure	Outdoor Temp.	Outdoor Humidity	Outdoor Air Flow	Outdoor Pressure	Outdoor Temp.	Outdoor Humidity	Outdoor Air Flow	Outdoor Pressure	Outdoor Temp.	Outdoor Humidity
00:00	26.5	50	20	32.0	70	30	1013.2	32.0	70	30	1013.2	32.0	70	30	1013.2	32.0	70
00:05	26.5	50	20	32.0	70	30	1013.2	32.0	70	30	1013.2	32.0	70	30	1013.2	32.0	70


Operation data storage during servicing

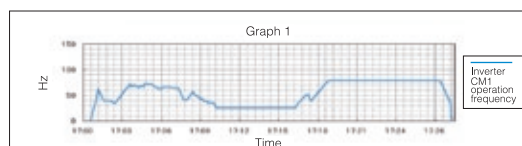

Operation data storage when a fault occurs

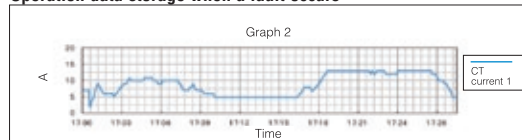

Method of connecting Mente PC in the combination Multi system

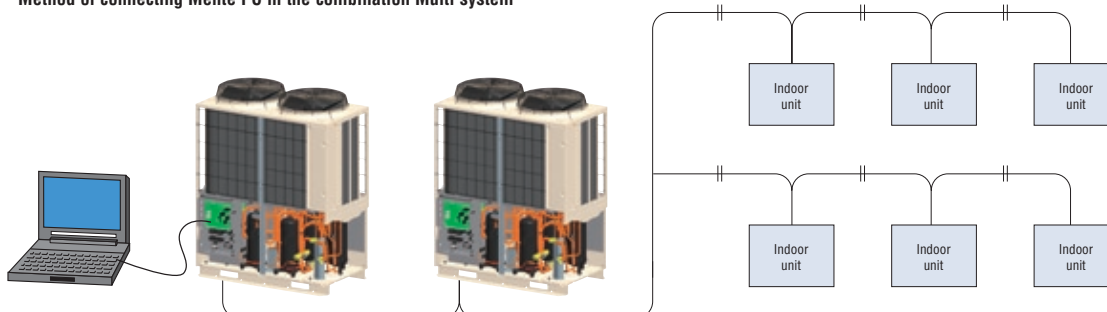

INTESIS BMS Interface for MHI air conditioners

All technical support, including specifying work, compatibility issues, product quality (repair and replacement issues), product liability issues and the required after sales service (including spare parts supply) will be provided by Intesis as it is an Intesis product. Product sales and delivery will be conducted by Intesis as well. For details concerning such matters please directly contact Intesis.

Integration of MHI KX in your KNX installation by Superlink

MH-AC-KNX-48
(Max 48 indoor units / Superlink I & II)
MH-AC-KNX-128
(Max 128 indoor units / Superlink II)




INTEGRATED GATEWAY

- Bidirectional: Supervision and Control
- Robust and reliable hardware
- Direct connection to KNX TP-1 BUS
- Independent management of communications
- Power supply: 230 VAC 50/60Hz
- Wall mounting case



TOUCH SCREEN

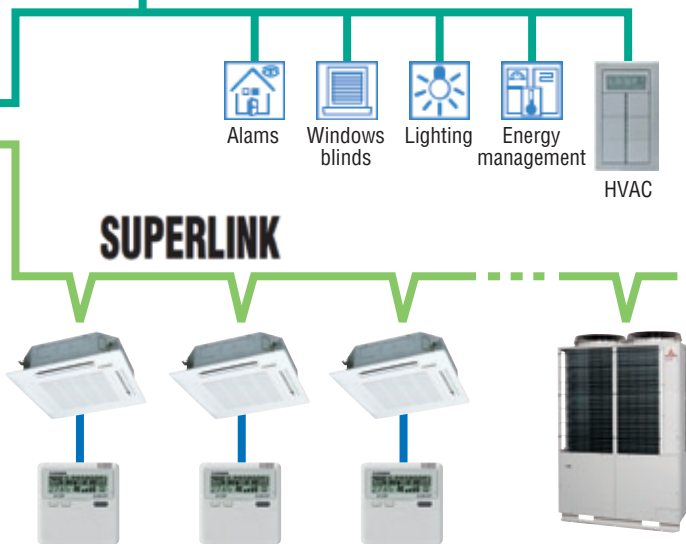

Integration of MHI KX in your Modbus installation by Superlink

MH-AC-MBS-48
(Max 48 indoor units / Superlink I & II)
MH-AC-MBS-128
(Max 128 indoor units / Superlink II)





INTEGRATED GATEWAY

- Bidirectional: Supervision and Control
- Robust and reliable hardware
- Modbus TCP or Modbus RTU RS-485/RS-232
- Independent management of communications
- Power supply: 230 VAC 50/60Hz
- Wall mounting case



MODBUS

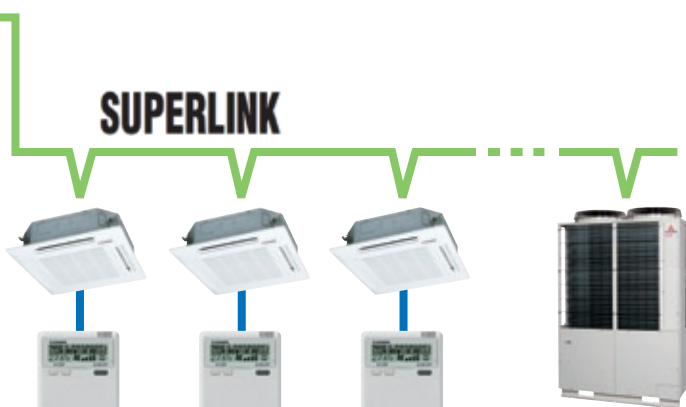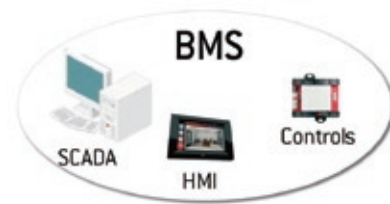

Integration of MHI PAC in your KNX installation by Remote control line


MH-RC-KNX-1i




IntesisBox

- Protocol : KNX TP-1 bus
- Dimension : 71 x 71 x 27 mm
- External Power supply : no need

Example :
Device as Master

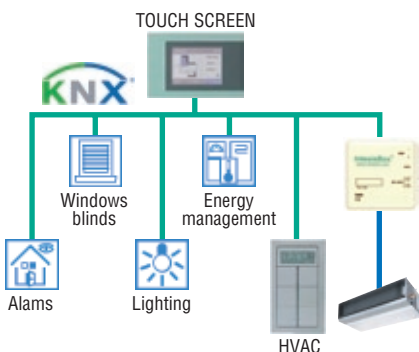

Example :
Device as Slave

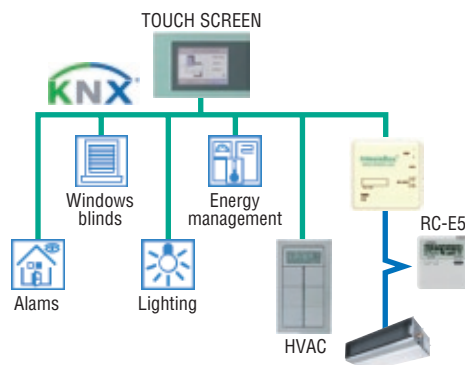

Integration of MHI PAC in your Modbus installation by Remote control line


MH-RC-MBS-1




IntesisBox

- Protocol : Modbus RTU (RS-485)
- Dimension : 93 x 53 x 58 mm
- External Power supply : no need

Example :
Device as Master

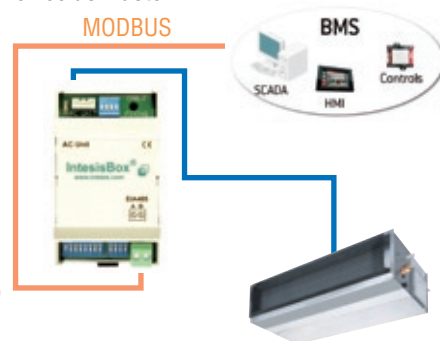

Example :
Device as Slave

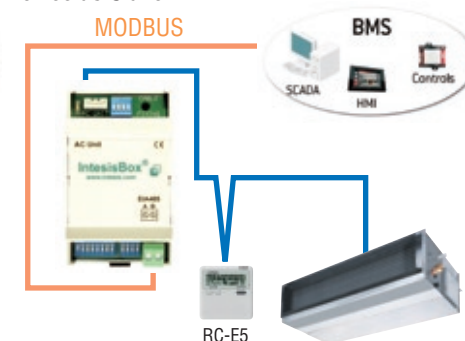

Integration of MHI PAC in your EnOcean installation by Remote control line

MH-RC-ENO-1i/1iC




IntesisBox

- Protocol : EnOcean
1i : 868MHz@EU
1iC : 315MHz@USA, ASIA
- Dimension : 100 x 70 x 28 mm
- External Power supply : no need

Example :
Device as Master



Example :
Device as Slave

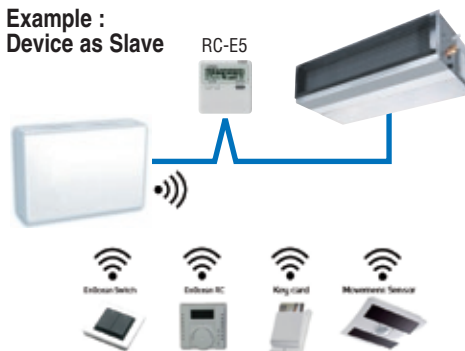

Please access the followings for details.



URL | <http://www.intesis.com>
email | info@intesis.com
tel | +34 938047 134



KX6 Outdoor units

High Head series (90m)

14~48hp (40.0~136.0kW)

Production by order

Model No.	Nominal Cooling Capacity
FDCH335KXE6-K ^{**}	33.5 kW
FDCH400KXE6	40.0 kW
FDCH450KXE6	45.0 kW
FDCH504KXE6	50.4 kW
FDCH560KXE6	56.0 kW
FDCH560KXE6-K ^{**}	56.0 kW
FDCH615KXE6	61.5 kW
FDCH680KXE6	68.0 kW

^{**} FDCH335KXE6-K & FDCH560KXE6-K are only used for combining with other models.

- Maximum allowable height difference between the outdoor and the indoor unit located at the lowest height position has been increased from 50m to 90m.
(When the outdoor unit is located at higher position than the indoor unit)


Model No.	Nominal Cooling Capacity
FDCH735KXE6 (FDCH335-K+FDCH400)	73.5 kW
FDCH800KXE6 (FDCH400x2)	80.0 kW
FDCH850KXE6 (FDCH400+FDCH450)	85.0 kW
FDCH900KXE6 (FDCH450x2)	90.0 kW
FDCH960KXE6 (FDCH450+FDCH504)	96.0 kW
FDCH1010KXE6 (FDCH504x2)	101.0 kW
FDCH1065KXE6 (FDCH504+FDCH560)	106.5 kW
FDCH1130KXE6 (FDCH560x2)	113.0 kW
FDCH1180KXE6 (FDCH560-K+FDCH615)	118.0 kW
FDCH1235KXE6 (FDCH615x2)	123.5 kW
FDCH1300KXE6 (FDCH615+FDCH680)	130.0 kW
FDCH1360KXE6 (FDCH680x2)	136.0 kW




FDCH335KXE6-K
FDCH400KXE6
FDCH450KXE6




FDCH504-680KXE6

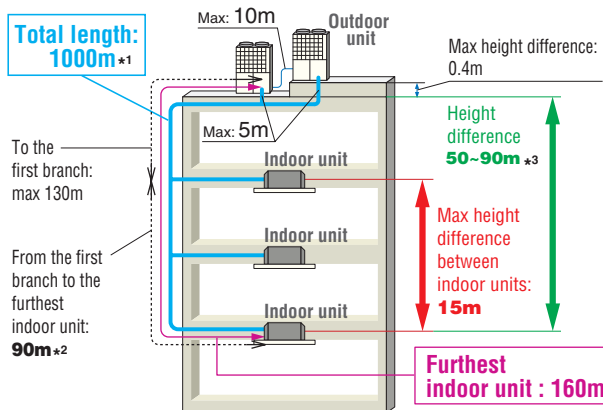

^{*1} Select the total pipe length depending on the connectable capacity of indoor units.

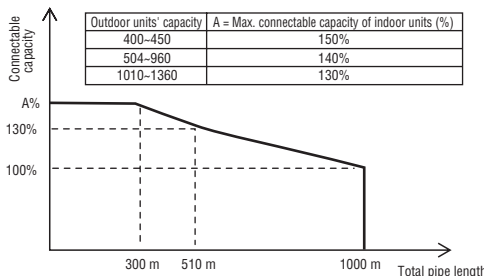

Range of operation

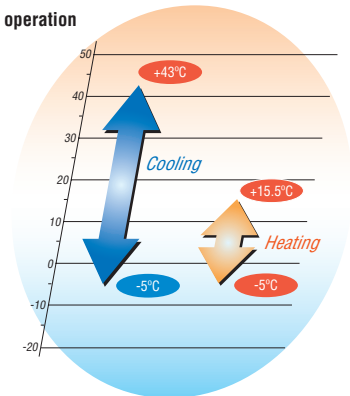

^{*2} The difference between the longest and shortest indoor unit piping from the first branch must be within 40m.

^{*3} In case of less than 50m, the High Head models can not be applied. In case Indoor unit is higher than outdoor unit, the High Head models can not be applied.

Specifications

Item	Model	FDCH400KXE6	FDCH450KXE6	FDCH504KXE6	FDCH560KXE6	FDCH615KXE6	FDCH680KXE6	
Nominal horse power		14HP	16HP	18HP	20HP	22HP	24HP	
Power source		3 Phase 380-415V, 50Hz						
Nominal capacity	Cooling	kW	40.0	45.0	50.4	56.0	61.5	
	Heating	kW	45.0	50.0	56.5	63.0	69.0	
Electrical characteristics	Starting current	A	8					
	Power consumption	Cooling	kW	11.27	12.97	14.73	16.79	20.37
		Heating	kW	11.73	13.10	15.12	16.79	18.48
	Running current	Cooling	A	18.4-16.9	21.1-19.3	24.1-22.0	27.4-25.1	33.1-30.3
		Heating	A	19.6-17.9	21.7-19.9	25.2-23.1	28.0-25.7	30.7-28.1
Exterior dimensions	HxWxD	mm	1690x1350x720			2048x1350x720		
Net weight		kg	336		358	377		
Refrigerant charge	R410A	kg	11.5				377	
Sound pressure level	Cooling / Heating	dB(A)	59.5 / 59.5	62.5 / 62.5	61.5 / 61.5	63.0 / 63.0	64.5 / 64.5	
Refrigerant piping size	Liquid line	mm(in)	ø12.7(1/2")			ø15.88(5/8")		
	Gas line		ø25.4(1") [ø28.58(1 1/8")]			ø28.58(1 1/8")		
Capacity connection		%	not fixed					
Number of connectable indoor units			36	40	36	40	44	

Item	Model	FDCH735KXE6	FDCH800KXE6	FDCH850KXE6	FDCH900KXE6	
Combination (FDCH)		335KXE6-K	400KXE6	400KXE6	450KXE6	
Nominal horse power		400KXE6	400KXE6	450KXE6	450KXE6	
Power source		26HP	28HP	30HP	32HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	kW	73.5	80.0	85.0	
	Heating	kW	82.5	90.0	95.0	
Electrical characteristics	Starting current	A	16			
	Power consumption	Cooling	kW	20.21	22.54	24.24
		Heating	kW	20.66	23.46	24.83
	Running current	Cooling	A	32.9-30.2	36.8-33.8	39.5-36.2
		Heating	A	34.4-31.4	39.2-35.8	41.3-37.8
Exterior dimensions	HxWxD	mm	1690x2700x720			
Net weight		kg	336x2			
Refrigerant charge	R410A	kg	11.5x2			
Refrigerant piping size	Liquid line	mm(in)	ø19.05(3/4")			
	Gas line		ø31.8(1 1/4") [ø34.92(1 3/8")]			
Capacity connection		%	not fixed			
Number of connectable indoor units			53	58	61	

Item	Model	FDCH960KXE6	FDCH1010KXE6	FDCH1065KXE6	FDCH1130KXE6	
Combination (FDCH)		450KXE6	504KXE6	504KXE6	560KXE6	
Nominal horse power		504KXE6	504KXE6	560KXE6	560KXE6	
Power source		34HP	36HP	38HP	40HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	kW	96.0	101.0	106.5	
	Heating	kW	108.0	113.0	119.5	
Electrical characteristics	Starting current	A	16			
	Power consumption	Cooling	kW	27.70	29.46	31.52
		Heating	kW	28.22	30.24	31.91
	Running current	Cooling	A	45.2-41.3	48.2-44.0	51.5-47.1
		Heating	A	46.9-43.0	50.4-46.2	53.2-48.8
Exterior dimensions	HxWxD	mm	2048x2700x720			
Net weight		kg	336+358			
Refrigerant charge	R410A	kg	11.5x2			
Refrigerant piping size	Liquid line	mm(in)	ø19.05(3/4")			
	Gas line		ø31.8(1 1/4") [ø34.92(1 3/8")]			
Capacity connection		%	not fixed			
Number of connectable indoor units			69	59	62	

Item	Model	FDCH1180KXE6	FDCH1235KXE6	FDCH1300KXE6	FDCH1360KXE6	
Combination (FDCH)		560KXE6-K	615KXE6	615KXE6	680KXE6	
Nominal horse power		615KXE6	615KXE6	680KXE6	680KXE6	
Power source		42HP	44HP	46HP	48HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	kW	118.0	123.5	130.0	
	Heating	kW	132.0	138.0	142.0	
Electrical characteristics	Starting current	A	16			
	Power consumption	Cooling	kW	37.16	40.74	45.35
		Heating	kW	35.27	36.96	37.56
	Running current	Cooling	A	60.5-55.4	66.2-60.6	73.4-67.2
		Heating	A	58.7-53.8	61.4-56.2	62.3-57.1
Exterior dimensions	HxWxD	mm	2048x2700x720			
Net weight		kg	377x2			
Refrigerant charge	R410A	kg	11.5x2			
Refrigerant piping size	Liquid line	mm(in)	ø22.22(7/8")			
	Gas line		ø38.1(1 1/2")			
Capacity connection		%	not fixed			
Number of connectable indoor units			69	72	76	


1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 3. [] : Pipe sizes applicable to European installations are shown in parentheses.



Dimensions


All measurements in mm.

FDCH335KXE6-K, 400KXE6, 450KXE6

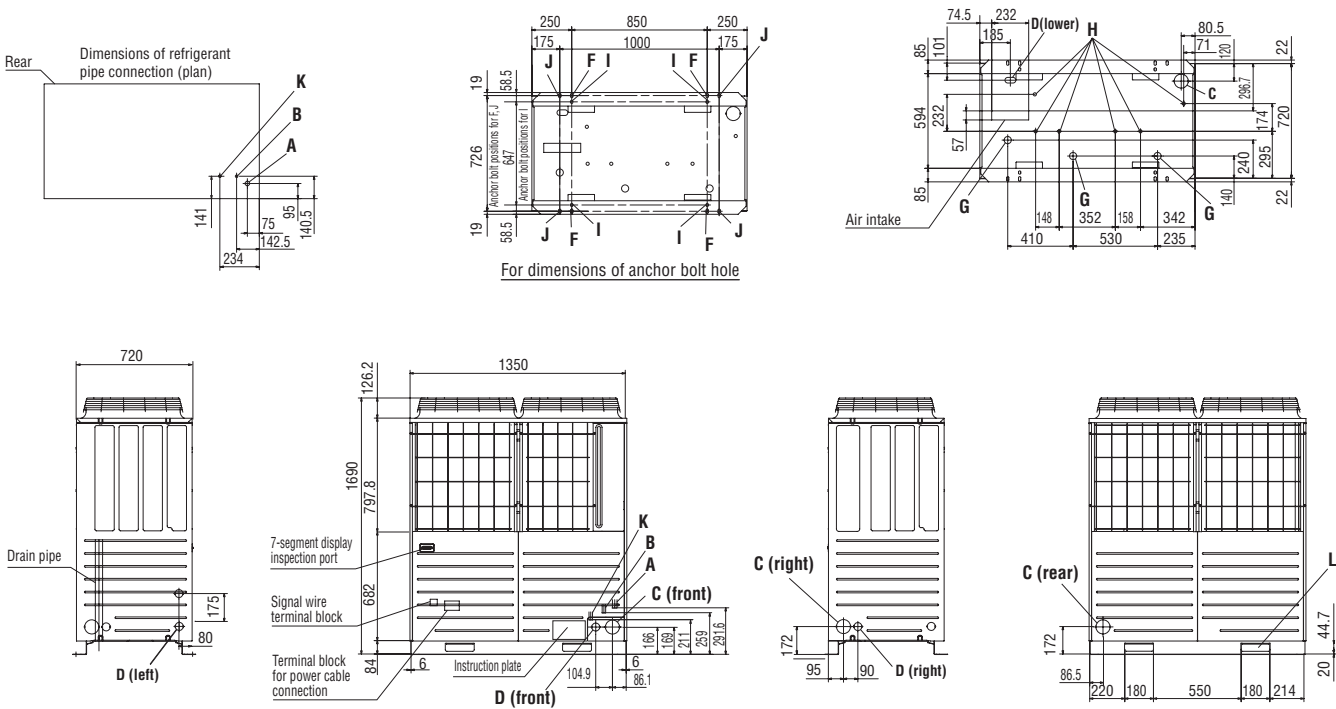

Mark	Item	
A	Service valve connection (gas side)	
B	Service valve connection (liquid line)	For refrigerant piping, please refer to the unit specifications.
C	Refrigerant pipe draw-out port	ø88
D	Power cable draw-in port	ø50
F	Anchor bolt hole	M10 x 4 places
G	Drain hose hole	ø45 x 3 places
H	Drain discharge port	ø20 x 6 places
K*	Oil-equalising pipe joint	ø3/8" flare
L	Sling holes for haulage or hoisting	180 x 44.7


Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	200
L ₃	100	300
L ₄	10	Open
H ₁	1500	-
H ₂	No restrictions	No restrictions
H ₃	1000	No restrictions
H ₄	No restrictions	-



*14, 16HP models only

- Notes:
- (1) The unit must be fixed with anchor bolts.
 - (2) Leave a 2m or larger space above the unit.
 - (3) The unit name plate is attached on the lower right corner of the front panel.
 - (4) The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
 - (5) Use a ø88 port for refrigerant pipe connection.
 - (6) Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
 - (7) The oil-equalising pipe K should be used when outdoor units are used in combination. (For 14, 16Hp only)

When more than one unit is installed

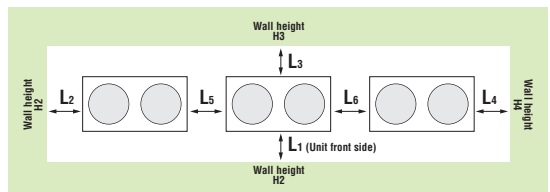


Installation example		
Dimensions	A	B
L ₁	500	Open
L ₂	10	200
L ₃	100	300
L ₄	10	Open
L ₅	0	400
L ₆	0	400
H ₁	1500	No restrictions
H ₂	No restrictions	No restrictions
H ₃	1000	No restrictions
H ₄	No restrictions	No restrictions

Dimensions


All measurements in mm.

FDCH504KXE6, 560KXE6, 560KXE6-K, 615KXE6, 680KXE6

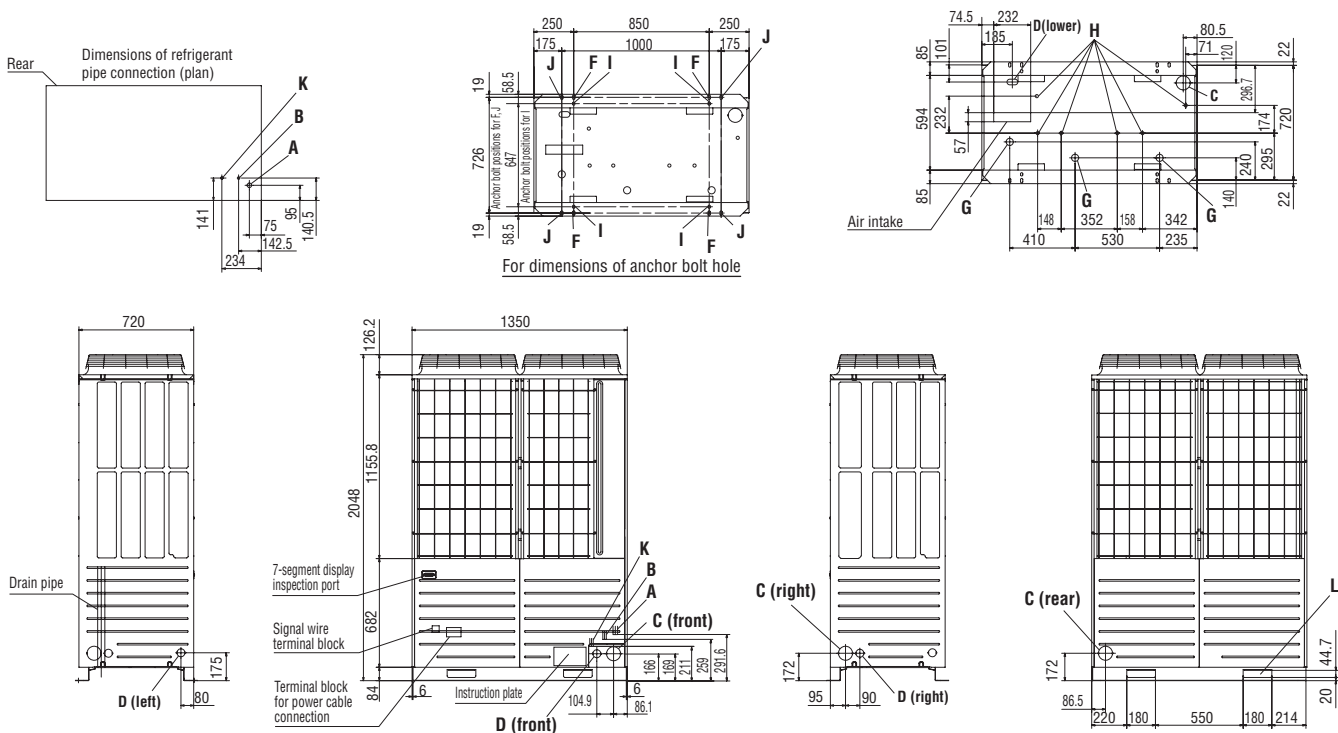

Mark	Item	
A	Service valve connection (gas side)	For refrigerant piping, please refer to the unit specifications.
B	Service valve connection (liquid line)	
C	Refrigerant pipe draw-out port	ø100
D	Power cable draw-in port	ø50
F	Anchor bolt hole	M10 x 4 places
G	Drain hose hole	ø45 x 3 places
H	Drain discharge port	ø20 x 6 places
K	Oil-equalising pipe joint	ø9.52 flare
L	Sling holes for haulage or hoisting	180 x 44.7

Installation example		
Dimensions	1	2
L ₁	500	Open
L ₂	10	200
L ₃	100	300
L ₄	10	Open
H ₁	1500	-
H ₂	No restrictions	No restrictions
H ₃	1000	No restrictions
H ₄	No restrictions	-



2m overhead clearance required

Notes:

- (1) The unit must be fixed with anchor bolts.
- (2) Leave a 2m or larger space above the unit.
- (3) The unit name plate is attached on the lower right corner of the front panel.
- (4) The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
- (5) Use a ø88 port for refrigerant pipe connection.
- (6) Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
- (7) The oil-equalising pipe K should be used when outdoor units are used in combination.



Refresh KX outdoor units




If replacing a used unit with a new one, Refresh KX can reuse existing piping.

Model No.	Nominal Cooling Capacity
FDCR224KXE6	22.4kW
FDCR280KXE6	28.0kW

<Option>

FDCR-V-KIT-E : Service valve kit

- Applies to a wide range of pipe sizes (R22, R407C, R410A standard size).
- Meets to a short period of renewal installation.
- Savings on replacement expenses such as scrapping waste material or procuring new pipe.
- Possible to replace the existing unit with a new larger capacity unit.
- Possible to replace plural systems with one system.
For example: Existing 5HP x 2units can be replaced with a new 10HP x 1unit.

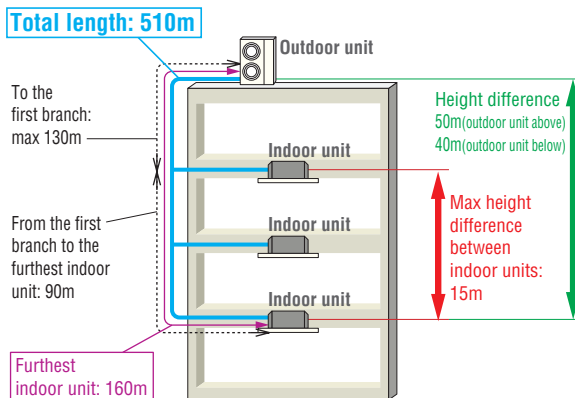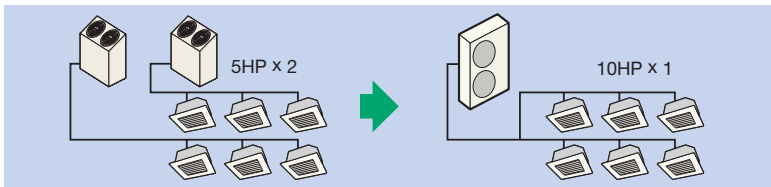

Specifications

Item	Model	FDCR224KXE6	FDCR280KXE6	
Nominal horse power		8HP	10HP	
Power source		3 Phase 380-415V, 50Hz		
Nominal capacity	Cooling	22.4	28.0	
	Heating	25.0	31.5	
Electrical characteristics	Starting current	5		
	Power consumption	Cooling	5.60	8.09
		Heating	6.03	8.21
	Running current	Cooling	9.25-8.47	13.22-12.10
Heating		9.85-9.02	13.41-12.28	
Exterior dimensions	HxWxD	mm 1675x1080x480		
Net weight		kg 224		
Refrigerant charge	R410A	kg 11.5		
Sound pressure level	Cooling/Heating	dB(A) 58/58		
Refrigerant piping size	Liquid line	mm(in) $\phi 9.52^{(3/8)}$ ~ $\phi 15.88^{(5/8)}$		
	Gas line	mm(in) $\phi 19.05^{(3/4)}$ ~ $\phi 25.4^{(1")}$		
Capacity connection		% 50~130		
Number of connectable indoor units		13	16	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Advanced refresh function

◆ When the existing unit is operable

The existing pipe can be reused by cooling operation only.

Pipe refresh kit and Service valve kit are not required.

1. Implement cooling operation of all indoor units for more than 30 minutes.
2. Implement pump-down after cooling operation.
3. Recover refrigerant and remove the existing outdoor unit and indoor unit.

◆ When the existing unit is not operable

The existing pipe can be reused by washing operation after connecting Refresh KX, Pipe refresh kit and Service valve kit.


Connecting and removing of Refresh KX and Pipe refresh kit is very easy by use of flexible pipe and flanges.

1. Pipe washing operation is implemented by changing dip switch on the outdoor unit PCB.
2. Completing washing is monitored via 7-segment display on the outdoor unit PCB.
3. As washing operation is about 60 minutes, it can meet to a required short period of renewal installation.

7-segment display




Pipe refresh kit (FDCR-KIT-E)

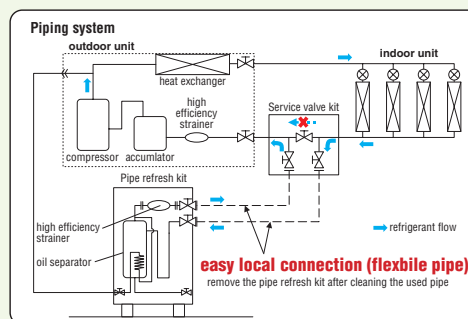


Dimensions

All measurements in mm.

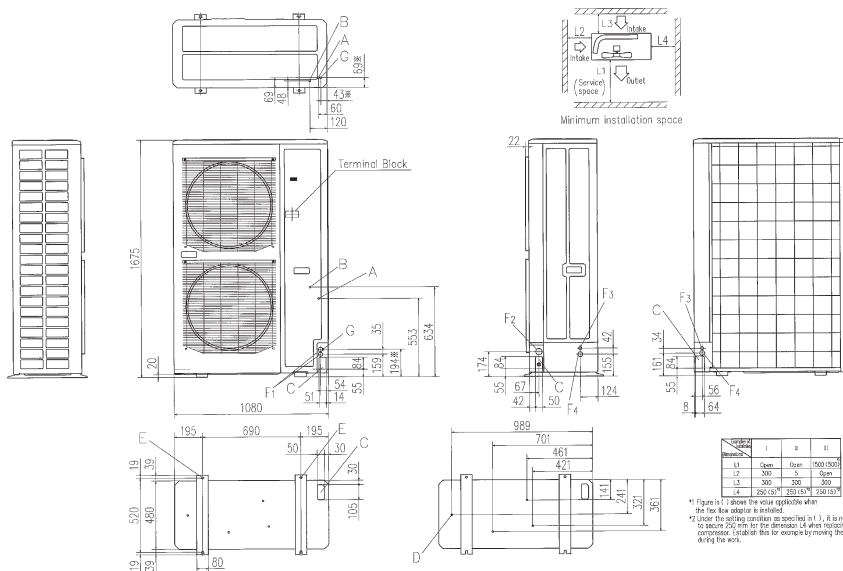

Service valve kit

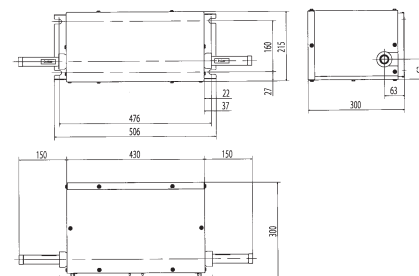

Mark	Item	Dimensions
A	Service valve connection of the attached connecting pipe (gas side)	ø19.05 (3/4") (Flare)
B	Service valve connection (liquid side)	ø12.7 (1/2) (Flare)
C	Pipe/cable draw-out hole	4places
D	Drain discharge hole	ø20 x 4places
E	Anchor bolt hole	M10 x 4places
F1	Cable draw-out hole	ø30
F2	Cable draw-out hole	ø45
F3	Cable draw-out hole	ø22
F4	Cable draw-out hole	ø34
G	Connecting position of the local pipe. (gas side)	ø25.4 (1") (Brazing)

Notes:

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave a 1m or larger space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The model name label is attached on the lower right corner of the front.
- (7) Connect the Service valve with local pipe by using the pipe of the attachment. (Gas side only)
- (8) Mark ※ shows the connecting position of the local pipe. (Gas side only)



Mitsubishi Heavy Industries **KX6**/further information

Mitsubishi Heavy Industries operates a continuous CSR (Corporate Social Responsibility) policy, with a role to realise a sustainable society through it's various areas of business.

Creed

- We strongly believe that the customer comes first and that we are obliged to be an innovative partner to society.
- We base our activities on honesty, harmony, and a clear distinction between public and private life.
- We shall strive for innovative management and technological development from an international perspective.

Reason for Instituting the Creed


In Japan there are many enterprises with their own “creeds” which simply represent their management concept.

Mitsubishi Heavy Industries, Ltd. has a creed of this type, also. It was instituted in 1970 on the basis of the policy advocated by Koyata Iwasaki, president of Mitsubishi Goshi Kaisha in the 1920's, to indicate the essential attitude of the company, the mental attitude of the employees, and the future directions of the company.


The reason for instituting the present creed is so that all of us can call to mind our one hundred years of tradition, and strive for further development in the future.

Issued 1 June 1970

MHI's creed was established based on “The Three Corporate Principles” shared by the Mitsubishi Group from the company's beginnings. In the spirit of this creed, MHI continues its efforts to fulfil its three corporate social responsibilities (CSRs): “corporate governance and compliance,” “the environment, human rights and labour,” and “contribution to society through business activities.”

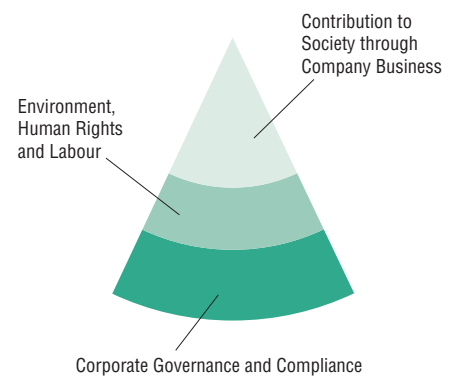

Contribution to Society through Company Business

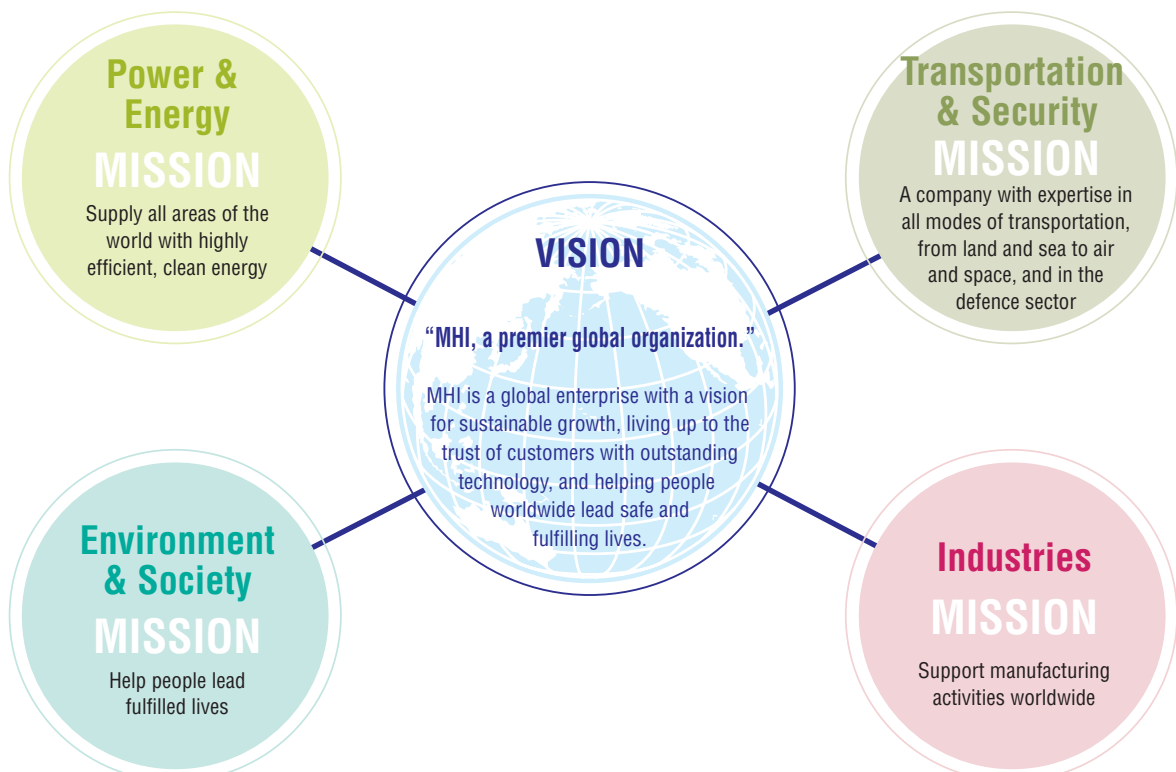

The KX6 product range has been developed in compliance with the Mitsubishi Heavy Industries Policy on the Environment.


In order to make the sustainable development of society possible, a basic policy on environmental matters has been established.

Pursuant to the express provision of Section 1 of its creed that “We strongly believe that customers come first and that we are obligated to be an innovative partner to society,” MHI shall, as a matter of primary importance, strive, through its R&D, manufacturing and other business activities, to play a useful role in the development of society. To this end, while remaining aware that a business enterprise is a member of society, MHI shall endeavour, in all aspects of its business activities, to reduce the burden on the environment and shall concentrate and fully utilise its technological capabilities for the development of technologies and products that will protect the environment, thus contributing to the establishment of a society in which sustainable development is possible.

In order to realise its basic policy, MHI has set the following seven conduct guidelines.

1. Recognise that environmental protection is top priority in the company’s operations, and encourage the entire company in its endeavours to protect and improve the environment.
2. Define roles and responsibilities regarding environmental protection by developing and maintaining a corporate organisation designated for environmental protection, and create and implement corporate policies and procedures on environmental matters.
3. Endeavour to reduce the burden on the environment by preventing pollution, saving resources, saving energy, reducing waste, reusing materials, and recycling in all aspects of the company’s business activities in R&D, designing, procurement of materials, manufacturing, transportation, use, service and disposal.
4. Endeavour to develop and provide advanced, highly reliable, unique technologies and products that contribute to solving environmental and energy problems.
5. Comply with national and local environmental laws and regulations, beyond mere compliance by enacting, implementing and evaluating voluntary standards where necessary, and to endeavour to continuously improve and promote environmental protection activities by establishing environmental goals and targets.
6. Endeavour to protect the environments of foreign countries by carefully examining the consequences of the company’s overseas business operations and the exportation of its products, and to become actively involved in technological co-operation overseas in areas of environmental protection.
7. Provide environmental training and other programs to enhance the environmental awareness of all company employees, and take steps to expand public relations activities, such as providing environment-related information to the public and social contribution activities.

Number of offices/plants by region (Consolidated) as of March, 2011

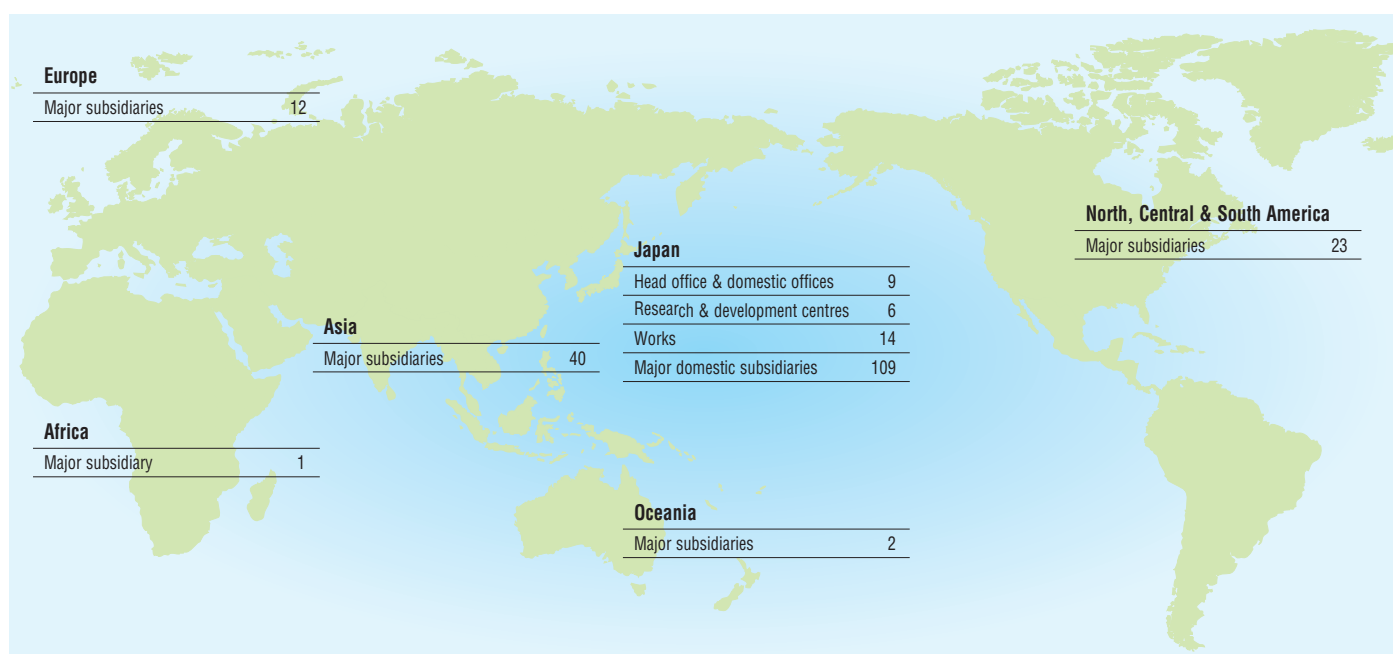

On the land and sea, in the sky and even in space, MHI's stage of operations is expanding limitlessly. We manufacture more than 700 different products which support various industrial and civil activities in both domestic and international markets.

Ships, steel structures, power systems, machinery for both industrial and general use, air-conditioners, pollution reduction and environmental control systems, aerospace systems – the MHI product lines which create rich and comfortable living environments, are as harmonious as an orchestra.

What creates this harmony is MHI's general technological expertise developed over more than a century of hard work. We are highly esteemed in the world for providing high

quality products through untiring technological research and development. From new energy development and environmental concerns to the exploration of space, with the advent of the 21st century MHI is confronting a variety of issues to ensure the realisation of a society in which there is harmony between mankind and technology.



- Ultra-High Steel Stacks
- Refuse Incineration Plants
- Night Soil Treatment Plants
- Electrostatic Precipitators
- Flue Gas Desulfurization System
- Fluidized Incinerators
- CFC Collecting Equipment



- Crude Oil Storage Barges
- LNG Tanks
- Boilers & Turbines
- Oil Production Plants
- Contra-Rotating Propellers
- Thermal Power Plants
- Combined Cycle Plants
- Fuel Cells
- Water Turbines
- Wind Turbines
- Geothermal Power Plants
- PWR Nuclear Power Plants
- Uranium Enrichment Equipment
- FBRs
- Co-Generation Systems



- Spillway Radial Gates
- Steel Bridges
- Penstocks
- Desalination Plants
- Physical Distribution Equipment
- Engines



- Unloader & Container Cranes
- Mechanical Parking Facilities
- Integrated Automated Storage Systems
- Rubber & Tyre Machinery
- Skyrails
- Monorail Cars
- New Transportation Systems
- Passenger Boarding Bridges

- Toll Collection Machine Systems
- Forklift Trucks
- Helicopters
- Aircraft
- Railway Maintenance Equipment
- LNG Carrier
- Container Ships



LOCAL DEVELOPMENT
TRANSPORTATION
ENVIRONMENT
RESOURCE/ENERGY



Our Technologies, Your Tomorrow



- Chemical Plants
- Wind Tunnel/Experiment Equipment
- Casting Machines
- Strip Mill
- Cement Plant
- Stepless Variable Speed Gears
- Industrial Robots
- Injection Moulding Machines
- Pulp & Paper Machinery
- Corrugation Machines
- Box Making Machines
- Machine Tools



- Ceiling Recess Packaged Air Conditioners
- Automotive Air Conditioners
- Residential Use Split Air Conditioners
- Refrigeration Units
- Dry Cleaning Machines
- Food Machinery
- Cruise Ships
- Multi-purpose Dome
- Stage Machinery Systems



- Cable Layer
- Printing Machinery



- Oceanographic Research Ships
- Deep Submergence Research Vehicles
- Communications Satellite Rockets
- Space Transportation
- Rockets & Engines



INDUSTRIAL

LEISURE/LIFESTYLE

INFORMATION SYSTEM

DEVELOPMENT

DEFENCE



- Submarines
- Naval Vessels
- Jet Fighters
- Helicopters
- Missiles
- Tanks & Infantry Fighting Vehicles

Before starting use

Heating performance

The heating performance values (kW) described in catalog are the values obtained by operating at an outdoor temperature of 7°C and indoor temperature of 20°C as set forth in the ISO Standards. As the heating performance decreases as the outdoor temperature drops, if the outdoor temperature is too low and the heating performance is insufficient, use other heating appliances as well.

Indication of sound values

The sound values are the values (A scale) measured in a chamber such as an anechoic chamber following the ISO Standards. In the actual installation state, the value is normally larger than the values given in the catalog due to the effect of surrounding noise and echo. Take this into consideration when installing.

Use in oil atmosphere

Avoid installing this unit in an atmosphere where oil scatters or builds up, such as in a kitchen or machine factory. If the oil adheres to the heat exchanger, the heat exchanging performance will drop, mist may be generated, and the synthetic resin parts may deform and break.

Use in acidic or alkaline atmosphere

If this unit is used in acidic atmosphere such as hot spring areas having high level of sulfuric gases or in alkaline atmosphere including ammonia or calcium chloride, places where the exhaust of the heat exchanger is sucked in, or at coastal areas where the unit is subject to salt breezes, the outer plate or heat exchanger, etc., will corrode. Please ask a dealer or specialist when you use an air conditioner in places differing from a general atmosphere.

Use in places with high ceilings

If the ceiling is high, install a circulator to improve the heat and air flow distribution when heating.

Refrigerant leakage

The refrigerant (R410A) used for Air conditioner is non-toxic and inflammable in its original state. However, in consideration of a state where the refrigerant leaks into the room, measures against refrigerant leaks must be taken in small rooms where the tolerable level could be exceeded. Take measures by installing ventilation devices, etc.

Use in snowy areas

Take the following measures when installing the outdoor unit in snowy areas.

•Snow prevention

Install a snow-prevention hood so that the snow does not obstruct the air intake port or enter and freeze in the outdoor unit.

•Snow piling

In areas with heavy snow fall, the piled snow could block the air intake port. In this case, a frame that is 50cm or higher than the estimated snow fall must be installed underneath the outdoor unit.

Automatic defrosting device

If the temperature is low, and the humidity is high, frost will stick to the heat exchanger of the outdoor unit. If use is continued, the heating performance will drop.

The "Automatic defrosting device" will function to remove this frost. After heating for approx. three to ten minutes, it will stop, and the frost will be removed. After defrosting, hot air will be blown again.

Servicing the air-conditioner

After the air-conditioner is used for several seasons, dirt will build up in the air-conditioner causing the performance to drop. In addition to regular servicing, we recommend the maintenance contract (charged for) by a specialist.

⚠ Safety Precautions

Air-conditioner usage target

The air-conditioner described in this catalog is a dedicated cooling/heating device for human use.

Do not use it for special applications such as the storage of foodstuffs, animals or plants, precision devices or valuable art, etc.

This could cause the quality of the items to drop, etc.

Do not use this for cooling vehicles or ships. Water leakage or current leaks could occur.

Before use

Always read the "User's Manual" thoroughly before starting use.

Installation

Always commission the installation to a dealer or specialist. Improper installation will lead to water leakage, electric shocks and fires.

Make sure that the outdoor unit is stable in installation. Fix the unit to stable base.

Usage place

Do not install in places where combustible gas could leak or where there are sparks.

Installation in a place where combustible gas could be generated, flow or accumulate, or places containing carbon fibers could lead to fires.



Mitsubishi Heavy Industries, Ltd.
Air-Conditioning & Refrigeration Systems
16-5, Konan 2-chome, Minato-ku, Tokyo, 108-8215 Japan
<http://www.mhi.co.jp>

Our factories are ISO9001 and ISO14001 certified.

Certified ISO 9001



BIWAJIMA PLANT
Mitsubishi Heavy Industries, Ltd.
Air-conditioning & Refrigeration Systems Headquarters



MITSUBISHI HEAVY INDUSTRIES-
MAHAJAK AIR CONDITIONERS CO., LTD.



Mitsubishi Heavy
Industries-Haier (Dungdao)
Air-conditioners Co., Ltd.

Certified ISO 14001



BIWAJIMA PLANT
Mitsubishi Heavy Industries, Ltd.
Air-conditioning & Refrigeration Systems Headquarters



MITSUBISHI HEAVY INDUSTRIES-
MAHAJAK AIR CONDITIONERS CO., LTD.



Mitsubishi Heavy
Industries-Haier (Dungdao)
Air-conditioners Co., Ltd.

